


2-1/2" Conventional Metal Stud

Non-load bearing conventional metal studs are "C" shaped. Fabricated from galvanized steel the "knock-outs" provided throughout the length of the drywall studs (a.k.a. screw studs) permit the easy horizontal routing of water, gas and electrical conduit. These "knock-outs" may also be used to install Phillips Cold Rolled Channel stiffeners where increased rigidity is required. Offered in 1-5/8", 2-1/2", 3-5/8", 4", 6" widths and 25, 22, 20, 18, 16 gauge.

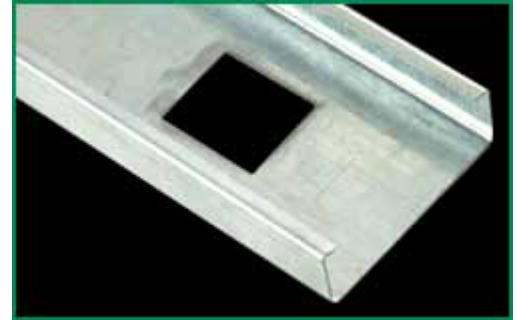

Product Data and Ordering Information

Material: 25, 22, 20, 18, 16 gauge, G40 galvanized coating
25 gauge hemmed, G40 galvanized coating
Part Number: 250S125


All Phillips products are made in the U.S.A.

ASTM and Code Standards

Phillips track meet or exceed the following ASTM standards:

- ASTM C1047 Standard Specification for Accessories for Gypsum Wallboard
- ASTM A653 Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process

SDS and other technical information available at www.phillipsmfg.com.



Leed Credits for Recycled Content

MR2 – The steel and vinyl used in Phillips Manufacturing products is 100% recyclable.

MR4 – Phillips Manufacturing steel and vinyl products have a minimum of:

Total recycled content:	30%
Post-consumer recycled content:	25%
Pre-consumer recycled content:	5%

Storage

Avoid bending or other damage and store in a dry place protected from moisture.

Project Information

Name: test
Address:

Contractor Information

Name: buildsite.com
Contact: Sue Marek
Phone:
Fax:

Architect Information

Name:
Contact:
Phone:
Fax:

