


## 1.75 Flat Diamond Mesh Lath

Phillips Diamond Mesh Lath is used as a plaster base and reinforcement on almost all types of walls and ceilings, over wood or steel framing, flat or curved surfaces. The large number of openings provide for better stucco bonding in both pumped and troweled applications. Widely used as a reinforcement for base coat in ceramic tile work. Manufactured to specified weight with hot-dipped galvanized steel.

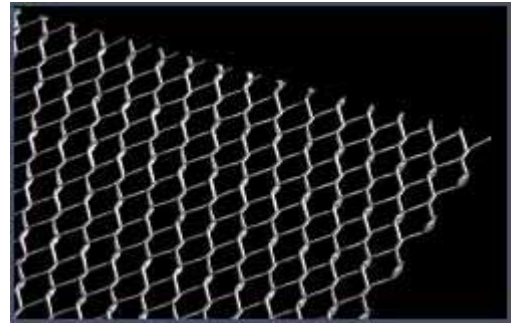

### Product Data and Ordering Information

Material: Hot-dipped galvanized  
Part Number: 175GLHDG8

Std Wt./ Sq. Yd.	Sheet Size	Pieces Per Bundle	Bundles Per Pallet	Sq. Yds. Per Bundle
1.75	27" x 97"	10	25	20

All Phillips products are made in the U.S.A.

### ASTM and Code Standards

Phillips Diamond Lath products meets or exceeds:

- ASTM A653 Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process.

SDS and other technical information available at [www.phillipsmfg.com](http://www.phillipsmfg.com).

### Leed Credits for Recycled Content

MR2 – The steel and vinyl used in Phillips Manufacturing products is 100% recyclable.

MR4 – Phillips Manufacturing steel and vinyl products have a minimum of:

Total recycled content:	30%
Post-consumer recycled content:	25%
Pre-consumer recycled content:	5%

### Storage

Avoid bending or other damage and store in a dry place protected from moisture.

### Leed v4 for building and Design Construction

- MR Prerequisite: Construction and Demolition Waste Management Planning.
- MR Credit: Construction and Demolition Waste Management.
- MR Credit: Building Product Disclosure and Optimization Sourcing of Raw Materials, Option2.
- MR Credit: Building Product Disclosure and Optimization Environmental Product Declaration, Options 1 & 2.
- MR Credit: Building Product Disclosure and Optimization Material Ingredients, Option 1.
- MR Credit: Building Life-Cycle Impact Reduction, Option 4