

5/8" Bullnose J-Round

Bullnose J-Round provides a rounded edge around door and window jambs perfect to use with non-kerfed door jambs. With a shortened back flange which is useful if drywall encasing is not desired

Product Data and Ordering Information

Material: .012 min thickness, minimum G40 galvanized
Also available in ShadowFree® surface coatings

Dimensions: 3/4" radius

Part Number: BJ6HDG

Length	Pieces Per Carton	Cartons Per Pallet	Feet Per Carton
7'	30	40	210
8'	30	40	240
9'	30	40	270
10'	30	40	300

All Phillips products are made in the U.S.A.

ASTM and Code Standards

Phillips Bullnose J-Round meets or exceeds:

- ASTM C 1047 Standard Specification for Accessories for Gypsum Wallboard
- ASTM A653 Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process

SDS and other technical information available at www.phillipsmfg.com

Leed Credits for Recycled Content

MR2 – The steel and vinyl used in Phillips Manufacturing products is 100% recyclable.

MR4 – Phillips Manufacturing steel and vinyl products have a minimum of:


Total recycled content: 30%
Post-consumer recycled content: 25%
Pre-consumer recycled content: 5%

Storage

Avoid bending or other damage and store in a dry place protected from moisture.

Leed v4 for building and Design Construction

- MR Prerequisite: Construction and Demolition Waste Management Planning.
- MR Credit: Construction and Demolition Waste Management.
- MR Credit: Building Product Disclosure and Optimization Sourcing of Raw Materials, Option2.
- MR Credit: Building Product Disclosure and Optimization Environmental Product Declaration, Options 1 & 2.
- MR Credit: Building Product Disclosure and Optimization Material Ingredients, Option 1.
- MR Credit: Building Life-Cycle Impact Reduction, Option 4

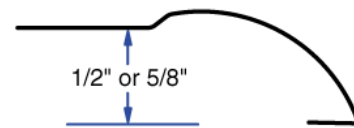

Drawing not to scale