



NEW AND IMPROVED PHILLIPS RC-XL

- Engineered to improve airborne (STC) and impact (IIC) sound transmission performance
- Quicker to install – does not require splicing to meet framing
- Deep knurling for optimal fastener seating
- Hot-dipped galvanized steel for corrosion prevention
- Comparable STC / IIC performance with ClarkDietrich RC Deluxe®

NEW AND IMPROVED PHILLIPS RC-XL

Engineered to Perform

DESCRIPTION

Phillips RC-XL is engineered to perform, delivering best-in-class STC / IIC performance in walls and ceilings. In fact, laboratory tests of wood- and steel-framed wall systems and floor-ceiling assemblies with the new Phillips RC-XL have resulted in comparable STC / IIC values as with ClarkDietrich RC Deluxe®. Improved for quicker installation, RC-XL requires no splicing to meet framing and features deep knurling for optimal fastener seating. This high-quality, hot-dipped galvanized steel accessory resists corrosion, providing long-lasting performance for your assembly.


All Phillips resilient channels meet or exceed the following ASTM standards:

- ASTM C645 *Standard Specification for Nonstructural Steel Framing Members*
- ASTM A653 *Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed)* by the Hot-Dip Process SDS and other technical information available at phillipsmfg.com

PRODUCT DATA AND ORDERING INFORMATION

Material	.020 min, 25 gauge, G40 galvanized coating
Part Number	RC1XLHDG
Length	12'
Pieces Per Bundle	20
Bundles Per Pallet	50
Feet Per Bundle	240

RC-XL

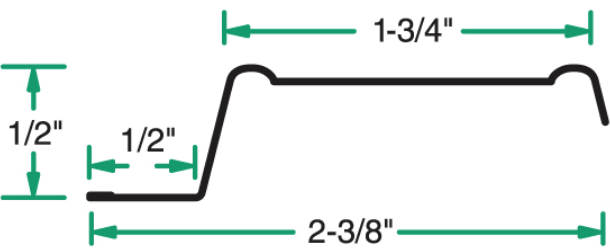

Made in U.S.A. with domestic and imported ingredients.
For product availability, please contact your local Phillips Manufacturing Sales Representative.

4-25
All rights reserved.
© 2025 USG Corporation and/or its affiliates.
Printed in U.S.A.

Manufactured by
Phillips Manufacturing, LLC
4949 South 30th Street
Omaha, NE 68107

PRODUCT INFORMATION
See phillipsmfg.com for the most up-to-date product information.
Product safety information: 800.822.5055 or phillipsmfg.com.

KEEP OUT OF REACH OF CHILDREN.

NOTE
Products described here may not be available in all geographic markets. The information in this document is subject to change without notice. USG and/or its affiliates assume no responsibility for any errors that may inadvertently appear in this document. Consult your USG sales office or representative for information.

NOTICE
We shall not be liable for consequential, incidental or special damages, directly or indirectly sustained, nor for any loss caused by application of these goods not in accordance with current printed instructions or for other than the intended use. Our liability is expressly limited to replacement of defective goods or a refund of the purchase price, at USG's option. Any claim shall be deemed waived unless made in writing to us within thirty (30) days from date it was or reasonably should have been discovered.

TRADEMARKS
The trademarks USG, the USG logo, PHILLIPS, the PHILLIPS logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.
RC Deluxe is a trademark of Clarkwestern Dietrich Building Systems LLC.

SAFETY FIRST!
Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read applicable SDSs and literature before specification and installation.

