


## 1.75 Self-Furring Dimpled Diamond Mesh Lath

Self-Furring Dimpled Diamond Mesh Lath is used extensively in stucco work as plaster reinforcement over masonry walls as well as in steel column fireproofing. It is also widely used as a reinforcement for base coat in ceramic tile work. Used over solid surfaces like concrete, cement board, column fireproofing, masonry and replastering over old surfaces. The self-furring dimples hold the metal lath 1/4" away from the surface to be plastered. The dimpled raised lath substrate provides a mechanical bond over solid surfaces and is easily shaped for curved or contoured surfaces. To maintain the designed furring characteristics, fasteners must be applied within the dimple cavity.

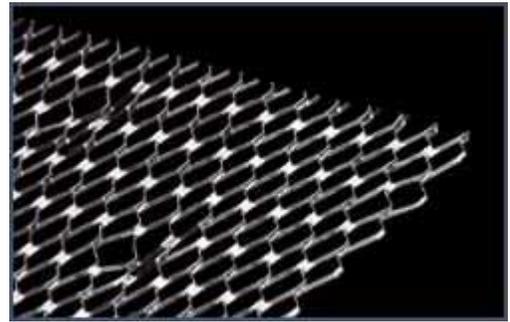

### Product Data and Ordering Information

Material: Hot-dipped galvanized  
 Part Number: 175SLHDG8

Std Wt./ Sq. Yd.	Sheet Size	Pieces Per Bundle	Bundles Per Pallet	Sq. Yds. Per Bundle
1.75	27" x 97"	10	25	20

All Phillips products are made in the U.S.A.

### ASTM and Code Standards

Phillips Diamond Lath products meets or exceeds:

- ASTM A653 Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process.

SDS and other technical information available at [www.phillipsmfg.com](http://www.phillipsmfg.com).

### Lead Credits for Recycled Content

MR2 – The steel and vinyl used in Phillips Manufacturing products is 100% recyclable.

MR4 – Phillips Manufacturing steel and vinyl products have a minimum of:

Total recycled content: 30%  
 Post-consumer recycled content: 25%  
 Pre-consumer recycled content: 5%

### Storage

Avoid bending or other damage and store in a dry place protected from moisture.