




## gripSTIK® Splay Corner Bead

gripSTIK® Splay Corner Bead offers a flush fit on a variety of open angle applications exceeding 120°. This versatile, easy-to-install splay can be nailed, stapled or applied with spray adhesive. The specially knurled and perforated flanges allow excellent joint compound adhesion. No mud additives or priming are needed prior to painting. Phillips bead is dent resistant, won't rust and easy to cut with shears, knife or fine-tooth hacksaw.

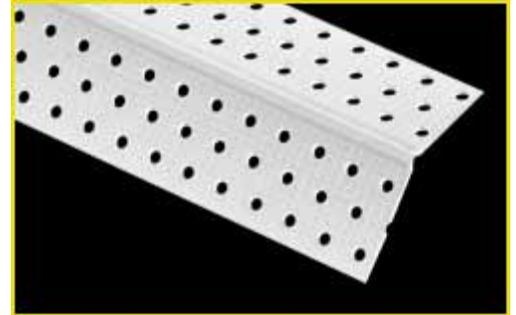


### Product Data and Ordering Information

Material: Extruded rigid vinyl; contains no asbestos  
 Dimensions: 1-1/4" leg x 1-1/4" leg  
 Part Number: CBSVYL

Length	Pieces Per Carton	Cartons Per Pallet	Feet Per Carton
8"	50	50	400
9'	50	50	450
10'	50	50	500

All Phillips products are made in the U.S.A.

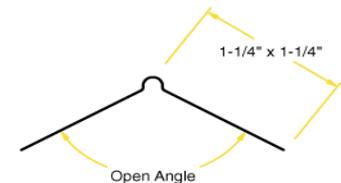

*Drawings not to scale*

### ASTM and Code Standards

Phillips gripSTIK® Splay Corner Bead meets or exceeds:

- ASTM C 1047 Standard Specification for Accessories for Gypsum Wallboard
- ASTM D 1784 Standard Specification for Rigid Poly (Vinyl Chloride) (PVC) Compounds and Chlorinated Poly (Vinyl Chloride) (CPVC) Compounds
- ASTM D 3678 Standard Specification for Rigid Poly (Vinyl Chloride) (PVC) Interior-Profile Extrusions

SDS and other technical information available at [www.phillipsmfg.com](http://www.phillipsmfg.com)

### Patents

U.S. Patents 6,295,776 and 6,691,476

### Leed Credits for Recycled Content

MR2 – The steel and vinyl used in Phillips Manufacturing products is 100% recyclable.

MR4 – Phillips Manufacturing steel and vinyl products have a minimum of:

Total recycled content:	30%
Post-consumer recycled content:	25%
Pre-consumer recycled content:	5%

### Storage

Avoid damage and store in a covered area away from direct sunlight.

