


kwikSTIK® Paper-Faced Nail-On Metal Bullnose Corner Bead 3/4" Southwestern (PBS)


kwikSTIK® Paper-Faced Nail-On Metal Bullnose Corner Beads are used on 90° outside corners with any standard drywall thickness for smooth, rounded corners. The rigid steel-reinforced corner is covered with a unique, high strength paper providing maximum strength and protection while preventing cracking caused by the movement or shrinkage of framing members. This product is an economical alternative to SLOK-N as it features the same fundamental properties as SLOK-N except this product utilizes slightly lighter steel that does not meet ASTM standard C1047. Install in the same manner as traditional metal and vinyl beads using screws, nails or staples.

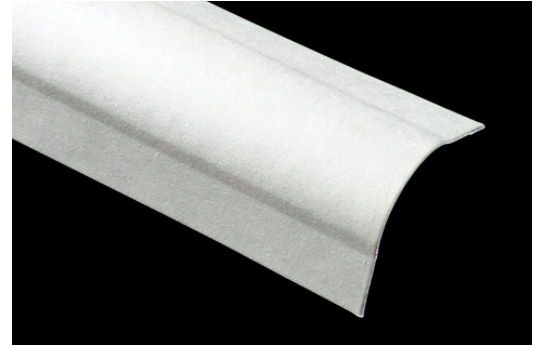

Product Data and Ordering Information

Material: .0.010 min thickness, minimum G40 galvanized
Dimensions: 3/4"
Part Number: PBS10EGB

Length	Pieces Per Carton	Cartons Per Pallet	Feet Per Carton
8"	50	56	400
9'	50	56	450
10'	50	56	500



Drawing not to scale

All Phillips products are made in the U.S.A.

ASTM and Code Standards

All Phillips kwikSTIK® Paper-Faced Tape-On Metal Corner Beads meets or exceeds the following ASTM standards except this product utilizes slightly lighter steel that does not meet ASTM standard C1047. However, this product meets all other applicable ASTM standard requirements:

- ASTM C1047 Standard Specification for Accessories for Gypsum Wallboard*
- ASTM A653 Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process

SDS and other technical information available at www.phillipsmfg.com.

Patents

U.S. Patents 6,295,776; 6,539,680; 6,722,092 and 7,013,610

Leed Credits for Recycled Content

MR2 – The steel and vinyl used in Phillips Manufacturing products is 100% recyclable.

MR4 – Phillips Manufacturing steel and vinyl products have a minimum of:

Total recycled content:	30%
Post-consumer recycled content:	25%
Pre-consumer recycled content:	5%

Storage

Avoid bending or other damage and store in a dry place protected from moisture.

Project Information

Name: test
Address:

Contractor Information

Name: buildsite.com
Contact: Sue Marek
Phone:
Fax:

Architect Information

Name:
Contact:
Phone:
Fax:

