


kwikSTIK® Paper-Faced Tape-On Metal Bullnose Splay Corner Bead 1-1/2" Bullnose Splay (PJT)


kwikSTIK® Paper-Faced Tape-On Metal Bullnose Splay Corner Beads are used to finish outside corners exceeding 120°. The rigid steel-reinforced corner is covered with a unique, high strength paper providing maximum strength and protection while preventing cracking caused by the movement or shrinkage of framing members. Features over 50% thicker steel than ASTM C1047 minimum requirement and is installed by pressing firmly into joint compound and removing excess compound with a drywall knife or clean rag.

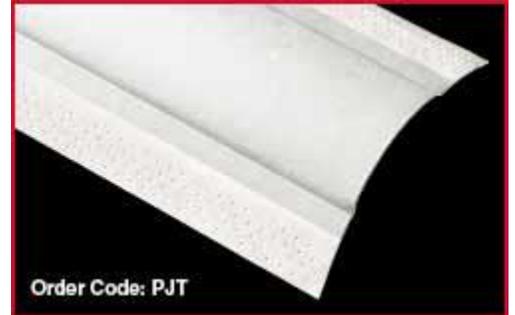

Product Data and Ordering Information

Material: .0014 min thickness, minimum G40 galvanized
Dimensions: 1-1/2" radius
Part Number: PJT14EGB

Length	Pieces Per Carton	Cartons Per Pallet	Feet Per Carton
8'	25	56	200
9'	25	56	225
10'	25	56	250



Drawing not to scale

All Phillips products are made in the U.S.A.

ASTM and Code Standards

All Phillips kwikSTIK® Paper-Faced Metal Bullnose Splay Corner Beads meet or exceed the following ASTM standards:

- ASTM C1047 Standard Specification for Accessories for Gypsum Wallboard*
- ASTM A653 Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process

SDS and other technical information available at www.phillipsmfg.com.

Patents

U.S. Patents 6,295,776; 6,539,680; 6,722,092 and 7,013,610

Leed Credits for Recycled Content

MR2 – The steel and vinyl used in Phillips Manufacturing products is 100% recyclable.

MR4 – Phillips Manufacturing steel and vinyl products have a minimum of:

Total recycled content: 30%
Post-consumer recycled content: 25%
Pre-consumer recycled content: 5%

Storage

Avoid bending or other damage and store in a dry place protected from moisture.