



## P2-OS (PSI)

Phillips kwikSTIK® P2-OS tape-on splay inside corner is designed for wider open angles on inside corners exceeding 120°. This product features approximately 20% thicker steel than ASTM standard C1047 minimum requirement for a strong, durable inside corner. No fasteners or nails are needed for installation. Specially engineered paper provides superior mud and paint adhesion.

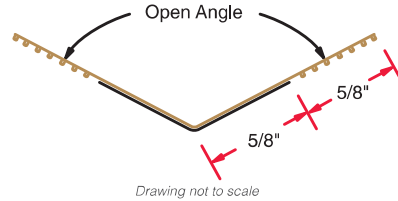


## 1/2" P4 L-TRIM (PL1)

Phillips kwikSTIK® 1/2" P4 L-Trim tape-on trim is ideal where wallboard abuts with suspended ceilings, beams, plaster, masonry and concrete walls, as well as untrimmed door and window jambs. L-Trim features approximately 20% thicker steel than ASTM standard C1047 minimum requirement for a strong, durable corner. No fasteners or nails are needed for installation, and specially engineered paper provides superior mud and paint adhesion. Also available without a bead.



## 5/8" P4 L-TRIM (PL5)

Phillips kwikSTIK® 5/8" P4 L-Trim tape-on trim is ideal where wallboard abuts with suspended ceilings, beams, plaster, masonry and concrete walls, as well as untrimmed door and window jambs. This product features approximately 20% thicker steel than ASTM standard C1047 minimum requirement for a strong, durable corner. This product is tape-on meaning no fasteners or nails are needed for installation. Specially engineered paper provides superior mud and paint adhesion. Also available without a bead.



### SIZES AND PACKAGING

#### PSI, PL1, PL5

| Length | Pieces Per Carton | Cartons Per Pallet | Feet Per Carton |
|--------|-------------------|--------------------|-----------------|
| 8'     | 50                | 56                 | 400             |
| 9'     | 50                | 56                 | 450             |
| 10'    | 50                | 56                 | 500             |

UPC labeling available upon request

