


## ECOMAXCI® FR AIR BARRIER

### EXTERIOR WALL APPLICATION (TYPE I-IV)

Rmax ECOMAXci® FR Air Barrier can be specified in exterior walls of buildings of any height utilizing brick veneer, stucco, limestone or natural stone veneer, cast artificial stone veneer, MCM, ACM, terracotta cladding, metal skin, cement board siding, stone/aluminum honeycomb composite panels, AAC panels or thin brick. Cladding attachment can be any standard installation technique, including open joint rainscreen systems.

ECOMAXci® FR Air Barrier has been tested per NFPA 285 and successfully passes with the printed side facing the exterior. The NFPA 285 listing/approval is dependent on all components of the assembly. For a full explanation of approved assemblies and acceptable components, refer to Rmax ECOMAXci® FR Air Barrier NFPA 285 Assembly Guide. Third-party evaluations and listings should also be consulted for specific instructions.

**Refer to ECOMAXci® FR Air Barrier Product Data Sheet for additional application/installation, compliances, thermal and physical properties, limitations and warnings.**

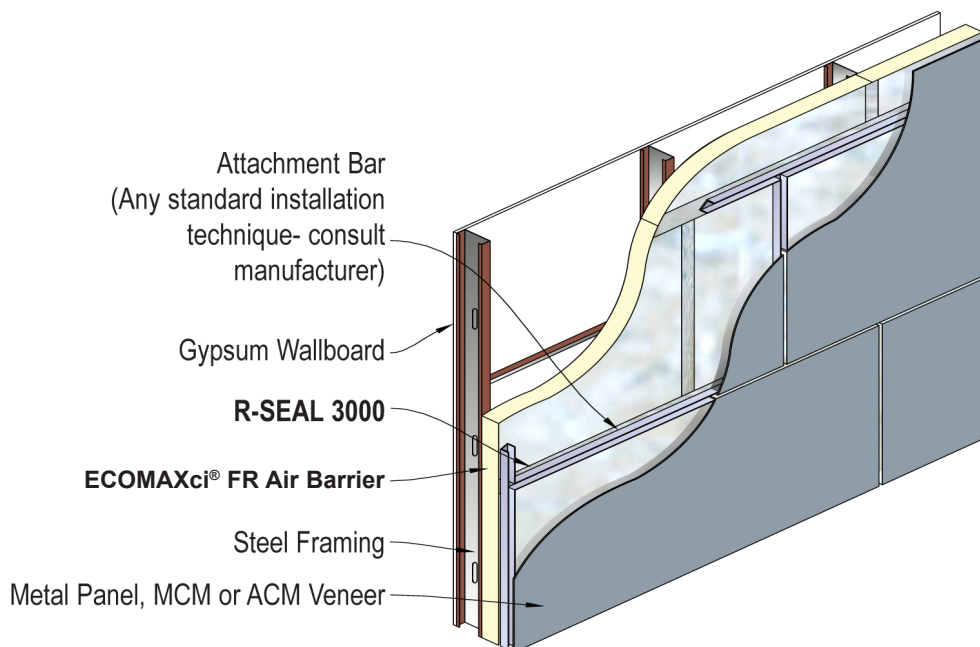

*Warranty: See Rmax "Sales Policy" and "Fifteen Year Limited Thermal Warranty" for terms and conditions. Rmax does not assume any responsibility or liability for the performance of any products other than those manufactured by Rmax. **NOTE: All Rmax products must be tarped, placed on skids and kept dry before and throughout construction.***



**BUILDING TRUST**



PRODUCT APPLICATION SHEET  
ECOMAXCI® FR AIR BARRIER  
Revision.02-26-2020  
www.rmax.com  
(800) 527-0890