

Product Application Sheet

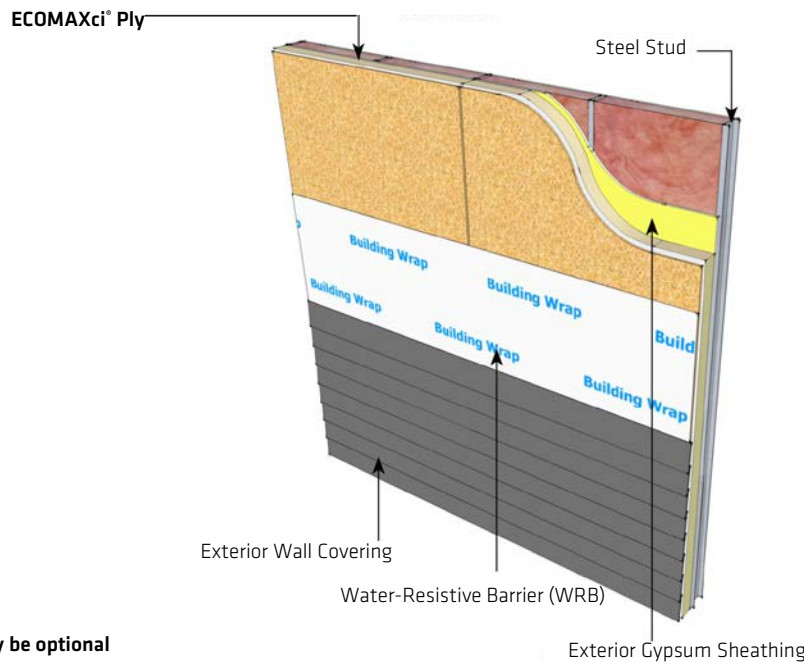
ECOMAXCI® PLY

EXTERIOR WALL (TYPE I-IV)

Rmax ECOMAXci® Ply can be specified in exterior walls of buildings of any height utilizing brick veneer, stucco, limestone or natural stone veneer, cast artificial stone veneer, MCM, ACM, terracotta cladding, metal skin, cement board siding, stone/aluminum honeycomb composite panels, AAC panels or thin brick. Cladding attachment can be any standard installation technique, including open joint rainscreen systems.

ECOMAXci® Ply has been tested per NFPA 285 and successfully passed. The NFPA 285 listing/approval is dependent on all components of the assembly. For a full explanation of approved assemblies and acceptable components, refer to Rmax ECOMAXci® Ply NFPA 285 Assembly Guide. Third party evaluations and listings should also be consulted for specific instructions.

Refer to ECOMAXci® Ply Product Data Sheet for additional application/installation, compliances, thermal and physical properties, limitations and warnings.

**NOTE:**

1. Exterior gypsum may be optional depending on assembly details.

WARRANTY

See Rmax® sales policy and limited warranties for terms and conditions. Rmax® does not assume any responsibility or liability for the performance of any products other than those manufactured by Rmax®. **NOTE: Factory packaging should not be relied upon as protection at job sites or other outdoor storage locations. When short-term outdoor storage is necessary, take the following precautions: Store flat above ground on raised pallets, place bundles on finished surfaces, cover with a breathable tarpaulin and secure cover to prevent wind displacement.**