


Multi-Vent Nailable Base-3: Insulation for Above the Deck Shingles / Roofing Tiles / Shakes / Metal Panel Applications

Specify and install Multi-Vent Nailable Base-3 over a structural roof deck. Refer to cover manufacturer for specific approvals and slope requirements. Follow recommendations of the cover supplier for application of underlayment felts and other details as required.

Refer to Multi-Vent Nailable Base-3 data sheet for additional application/installation, compliances, thermal and physical properties, limitations and warnings.

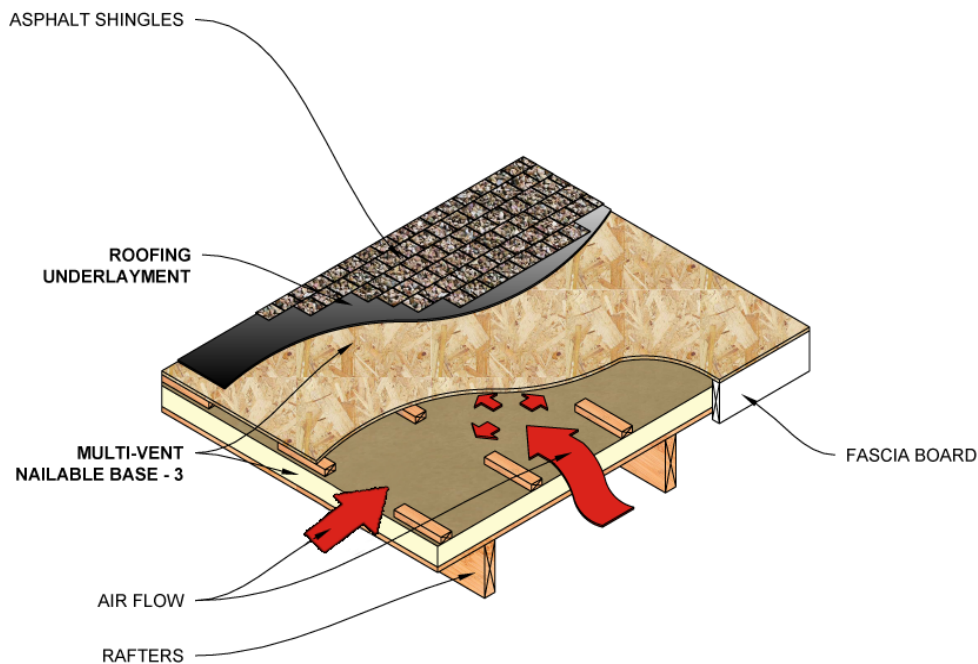

*Warranty: See Rmax "Sales Policy" and applicable warranties for terms and conditions. Rmax does not assume any responsibility or liability for the performance of any products other than those manufactured by Rmax. **NOTE: All Rmax products must be tarped, placed on skids and kept dry before and throughout construction. Requests for Certification Letters and/or special warranty considerations must be submitted to Rmax Sales prior to delivery of the products.***

2017-11