

RODENHOUSE





Fastening Systems



Plasti-Grip® PMF Plastic Masonry Fastener

Use for fastening rigid foam insulation to concrete or masonry block

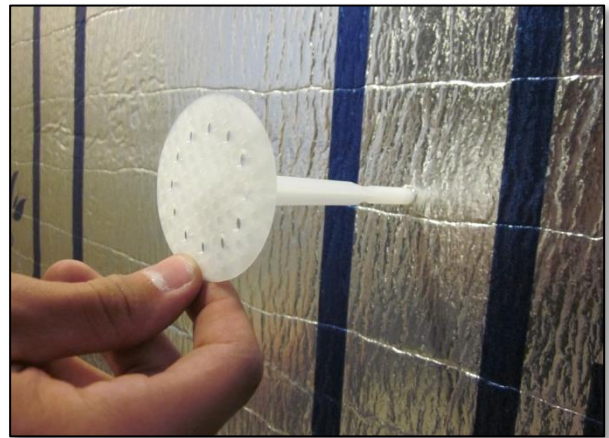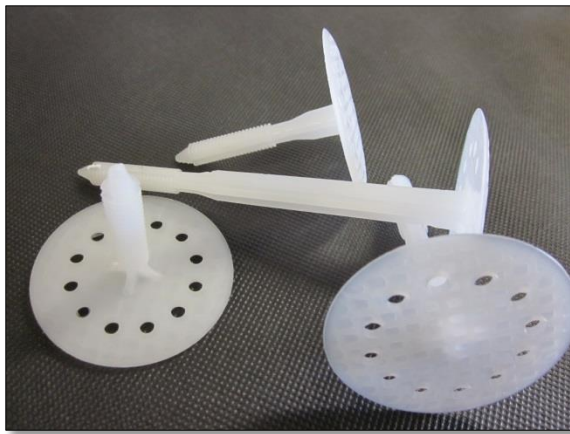


SPECS:

- 2 3/8" diameter washer head
- Simple to install – drill and hammer
- Solid plastic design prevents thermal bridging
- No pins, screws, or adhesives required
- Pre-drill hole with 5/16" masonry bit
- Eliminates rusting screws

Available Lengths:

- 2" PMF for insulation thickness of 1/2" – 1"
- 2 3/4" PMF for insulation thickness of 1" – 1 1/2"
- 3 1/2" PMF for insulation thickness of 1 1/2" – 2 1/2"
- 4 1/2" PMF for insulation thickness of 2 1/2" – 3 1/2"
- 5 3/8" PMF for insulation thickness of 3 1/2" – 4 1/4"



**Rmax Sales and Plant
Locations**
13524 Welch Road
Dallas, TX 75244
972-387-4500

1649 South Batesville Road
Greer, SC 29650
864-297-1382

210 Lyon Drive
Fernley, NV 89408
775-575-4849

rmax@rmax.com
www.rmax.com

Rodenhouse Inc.
974 Front NW #100
Grand Rapids, MI 49504
(T) 616-454-3100
(F) 616-454-0404
www.rodenhouse-inc.com

