


## SIPLD LIGHT-DUTY #2 DRILL POINT NAILBOARD FASTENER ATTACHING PANELS TO CORRUGATED STEEL (22-18GA)

### SCREW LENGTH

Screws should be at least 1" longer than the total thickness of all components, i.e., face of framing to fastener head. For example, an assembly with 5/8" exterior gypsum and 4" nailable insulation (3 1/4" foam + 3/4" wood) has a total thickness of 4 5/8" and requires a minimum 5 5/8" screw. The next available size would be 6".

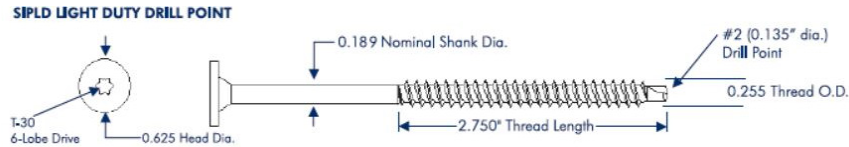

Screw Length	Maximum Distance Between Deck/Framing and Screw Head	Thread Length
3"	2"	2.750"
3 1/2"	2 1/2"	2.750"
4"	3"	2.750"
4 1/2"	3 1/2"	2.750"
5"	4"	2.750"
5 1/2"	4 1/2"	2.750"
6"	5"	2.750"
6 1/2"	5 1/2"	2.750"
7"	6"	2.750"
7 1/2"	6 1/2"	2.750"
8"	7"	2.750"
8 1/2"	7 1/2"	2.750"
9"	8"	2.750"
9 1/2"	8 1/2"	2.750"
10"	9"	2.750"
11"	10"	2.750"
12"	11"	2.750"
13"	12"	2.750"
14"	13"	2.750"
15"	14"	2.750"
16"	15"	2.750"
18"	17"	2.750"




**INSTALLATION FOR ROOF PRODUCTS<sup>1</sup>**

Nailable Base-3  
Multi-Vent Nailable Base-3

*Additional fasteners required at roof perimeters and corners. Additional fasteners may also be required based on design (slope, snow loads, uplift, etc.). Consult designer and/or roof cover manufacturer, as well as, Factory Mutual Approval Guide, RoofNav, and Loss Prevention Data Sheets for additional requirements.*

4'x8' Panel – 15 fasteners

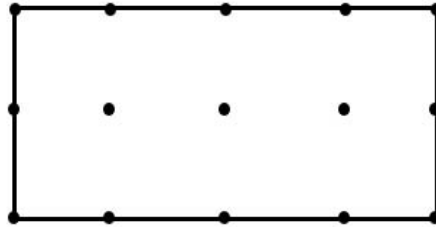

---

**INSTALLATION FOR WALL PRODUCTS<sup>1</sup>**

ThermaBase™-CI  
ECOMAXci® Ply  
ECOMAXci® FR Ply

Refer to DrJ Technical Evaluation Reports (TER) for fastening pattern and complete guidelines.

---

<sup>1</sup>Other materials, such as gypsum, should be fastened separately per manufacturer's instructions.

---

**Rmax Sales Offices / Plant Locations**

**Central**

13524 Welch Road  
Dallas, TX 75244  
(P) 972-387-4500  
(F) 972-387-4673

**East**

1649 South Batesville Road  
Greer, SC 29650  
(P) 864-297-1382  
(F) 864-234-7548

**West**


210 Lyon Drive  
Fernley, NV 89408  
(P) 775-575-4849  
(F) 775-575-5035

## SIPHD HEAVY-DUTY #4 DRILL POINT NAILBOARD FASTENER ATTACHING PANELS TO THICK STEEL (16GA-3/16") WITHOUT PRE-DRILLING

### SCREW LENGTH

Screws should be at least 1" longer than the total thickness of all components, i.e., face of framing to fastener head. For example, an assembly with 5/8" exterior gypsum and 4" nailable insulation (3 1/4" foam + 3/4" wood) has a total thickness of 4 5/8" and requires a minimum 5 5/8" screw. The next available size would be 6".

Screw Length	Maximum Distance Between Deck/Framing and Screw Head	Thread Length
6"	5"	3.875"
8"	7"	3.875"
9 3/4"	8 3/4"	3.875"
11 3/4"	10 3/4"	3.875"
13 3/4"	12 3/4"	3.875"

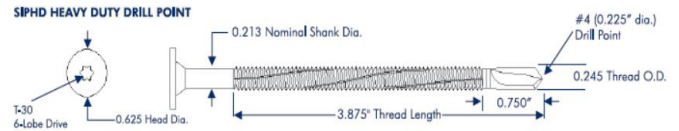


### INSTALLATION FOR ROOF PRODUCTS<sup>1</sup>

Nailable Base-3  
Multi-Vent Nailable Base-3

*Additional fasteners required at roof perimeters and corners. Additional fasteners may also be required based on design (slope, snow loads, uplift, etc.). Consult designer and/or roof cover manufacturer, as well as, Factory Mutual Approval Guide, RoofNav, and Loss Prevention Data Sheets for additional requirements.*

4'x8' Panel – 15 fasteners

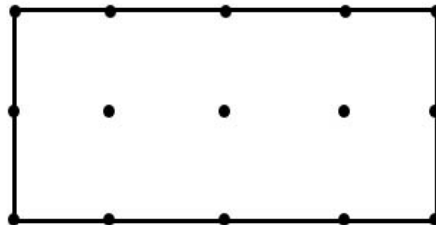

### INSTALLATION FOR WALL PRODUCTS<sup>1</sup>

ThermaBase™ -CI  
ECOMAXci® Ply  
ECOMAXci® FR Ply

Refer to DrJ Technical Evaluation Reports (TER) for fastening pattern and complete guidelines.

<sup>1</sup>Other materials, such as gypsum, should be fastened separately per manufacturer's instructions.

#### Rmax Sales Offices / Plant Locations


Central	East	West
13524 Welch Road Dallas, TX 75244 (P) 972-387-4500 (F) 972-387-4673	1649 South Batesville Road Greer, SC 29650 (P) 864-297-1382 (F) 864-234-7548	210 Lyon Drive Fernley, NV 89408 (P) 775-575-4849 (F) 775-575-5035

## SIPTP GIMLET THREAD POINT NAILBOARD FASTENER

### ATTACHING PANELS TO WOOD AND TIMBER

#### SCREW LENGTH

Screws should be at least 1" longer than the total thickness of all components, i.e., face of framing to fastener head. For example, an assembly with 5/8" exterior gypsum and 4" nailable insulation (3 1/4" foam + 3/4" wood) has a total thickness of 4 5/8" and requires a minimum 5 5/8" screw. The next available size would be 6".

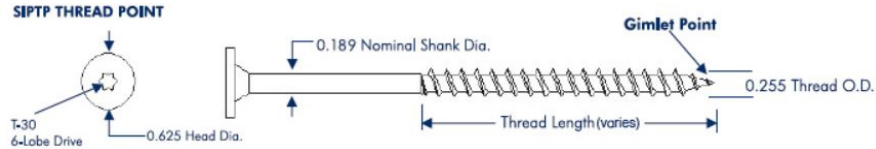

Screw Length	Maximum Distance Between Deck/Framing and Screw Head	Thread Length
2"	1"	1.750"
2 1/2"	1 1/2"	1.750"
3"	2"	2.0"
3 1/2"	2 1/2"	2.0"
4"	3"	2.750"
4 1/2"	3 1/2"	2.750"
5"	4"	2.750"
5 1/2"	4 1/2"	2.750"
6"	5"	2.750"
6 1/2"	5 1/2"	2.750"
7"	6"	2.750"
7 1/2"	6 1/2"	2.750"
8"	7"	2.750"
8 1/2"	7 1/2"	2.750"
9"	8"	2.750"
10"	9"	2.750"
11"	10"	2.750"
12"	11"	2.750"
13"	12"	2.750"
14"	13"	2.750"
15"	14"	2.750"
16"	15"	2.750"
18"	17"	2.750"




**INSTALLATION FOR ROOF PRODUCTS<sup>1</sup>**

Nailable Base-3

Multi-Vent Nailable Base-3

*Additional fasteners required at roof perimeters and corners. Additional fasteners may also be required based on design (slope, snow loads, uplift, etc.). Consult designer and/or roof cover manufacturer, as well as, Factory Mutual Approval Guide, RoofNav, and Loss Prevention Data Sheets for additional requirements.*

4'x8' Panel – 15 fasteners

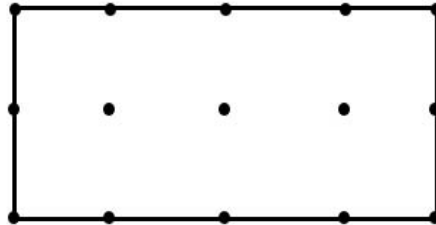

---

**INSTALLATION FOR WALL PRODUCTS<sup>1</sup>**

ThermaBase™ -CI

ECOMAXci® Ply

ECOMAXci® FR Ply

Refer to DrJ Technical Evaluation Reports (TER) for fastening pattern and complete guidelines.

---

<sup>1</sup>Other materials, such as gypsum, should be fastened separately per manufacturer's instructions.

---

**Rmax Sales Offices / Plant Locations**

**Central**

13524 Welch Road  
Dallas, TX 75244  
(P) 972-387-4500  
(F) 972-387-4673

**East**

1649 South Batesville Road  
Greer, SC 29650  
(P) 864-297-1382  
(F) 864-234-7548

**West**

210 Lyon Drive  
Fernley, NV 89408  
(P) 775-575-4849  
(F) 775-575-5035