



TSA-FA-3

Insulation for the Building Envelope

ROOF

WALL

SPECIALTY

Doing one thing well in so many ways...

Rmax is a U.S. owned company that only manufactures polyiso insulation. TSA-FA-3 is manufactured in the U.S. and is offered through an extensive distribution network. It is available in standard four foot wide panels, with standard panel lengths of eight or nine feet. Custom lengths are available for special orders. Contact Rmax Sales at your regional Customer Service Center for product availability, pricing information, and your nearest distribution center.

Corporate & Technical

Rmax Operating, LLC
13524 Welch Road
Dallas, Texas 75244-5291
Phone: (972) 387-4500
Fax: (972) 387-4673
Email: rmax@rmax.com
Web: www.rmax.com

Customer Service & Plant Locations

Central Region

Dallas, Texas
(800) 527-0890 Ext. 102

Eastern Region


Greer, South Carolina
(800) 845-4455 Ext. 156

Western Region

Fernley, Nevada
(800) 762-9462 Ext. 156

PRODUCT DESCRIPTION

Rmax TSA-FA-3 is an energy-efficient thermal insulation board composed of a closed-cell polyisocyanurate (polyiso) foam core bonded to glass fiber/organic mat facers on each side. TSA-FA-3 utilizes a CFC-, HCFC- and HFC-free blowing agent that has zero Ozone Depletion Potential (ODP) and negligible Global Warming Potential (GWP). This insulation is suitable for use in walls, ceilings and some limited roofing applications in new construction for commercial, residential, agricultural and industrial buildings and in thermal retrofit construction within existing buildings.

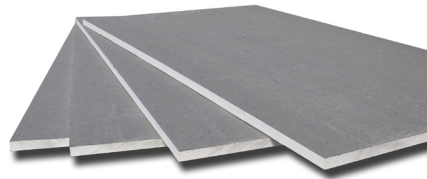

COMPLIANCES

- ASTM C1289 Type II, Class 1
- International Building Code (IBC) Section 2603, Foam Plastic
- ASHRAE 90.1
- California Code of Regulations, Title 24

CONSTRUCTION APPLICATIONS

- Stud walls
- Masonry walls
- Exterior stucco
- Re-siding
- Vaulted ceilings
- Attics and crawl spaces
- Limited roofing applications

INCENTIVE OPPORTUNITIES

- Reduces energy costs
- Contributes toward LEED® credits
- Offers tax credits, where applicable

THERMAL PROPERTIES / PRODUCT DATA

"R" means resistance to heat flow. The higher the R-value, the greater the insulating power.

Nominal Thickness	Thermal R-Value ¹	Bundle Data ² (48" x 96")		Truckload Data (48" x 96")	
		Inches	°F•sqft•hr/Btu	Pieces	Sq. Ft.
1.0	6.0	48	1,536	1,152	36,864
1.5	9.0	32	1,024	768	24,576
2.0	12.1	24	768	576	18,432
2.5	15.3	19	608	456	14,592
3.0	18.5	16	512	384	12,288
3.5	21.7	13	416	312	9,984
4.0	25.0	12	384	288	9,216
4.5	28.3	10	320	240	7,680

¹Thermal values are determined by using ASTM C518 test method at 75°F mean temperature on material conditioned according to PIMA Technical Bulletin No. 101.

²TSA-FA-3 is shipped in bundles that are approximately 48 inches high and wrapped in plastic for easy handling.

Visit www.rmax.com/resources.asp for a complete list of thicknesses and packaging information.

TYPICAL PHYSICAL PROPERTIES

Physical properties shown are based on data obtained under controlled conditions and are subject to normal manufacturing tolerances.

Property	Test Method	Results
Density, Overall, Nominal	ASTM D1622	2.0 pcf
Compressive Strength	ASTM D1621	20 psi ¹
Flame Spread, Core ²	ASTM E84	75 or Less
Smoke Developed, Core ²	ASTM E84	< 450
Water Vapor Transmission	ASTM E96	< 1.5 perm
Water Absorption	ASTM C209	< 1% Vol.
Dimensional Stability	ASTM D2126, 7 days, 158°F, 98% rh	< 2% Linear Change
Service Temperatures		-40°F to +250°F


¹Also available in 25 psi upon request.

²Flame spread and smoke numbers are shown for comparison purposes only and are not intended to represent the performance of TSA-FA-3 and related components under actual fire conditions.




APPLICATION / INSTALLATION


Stud Wall Construction - TSA-FA-3 applied to the exterior or interior face of wood or metal studs, to cover all studs, sills, plates and header constructions, provides a layer of continuous insulation (ci) over details not normally covered by insulation products. It may be secured to the framing or structural sheathing with bugle-head screws, galvanized roofing nails or common nails driven through cap washers. Quality-grade construction adhesives may also be used to secure the TSA-FA-3 on interior applications. Exterior facades may include exterior siding and stucco. TSA-FA-3 must be covered on the interior with a minimum 1/2" gypsum wallboard interior finish that is mechanically attached.

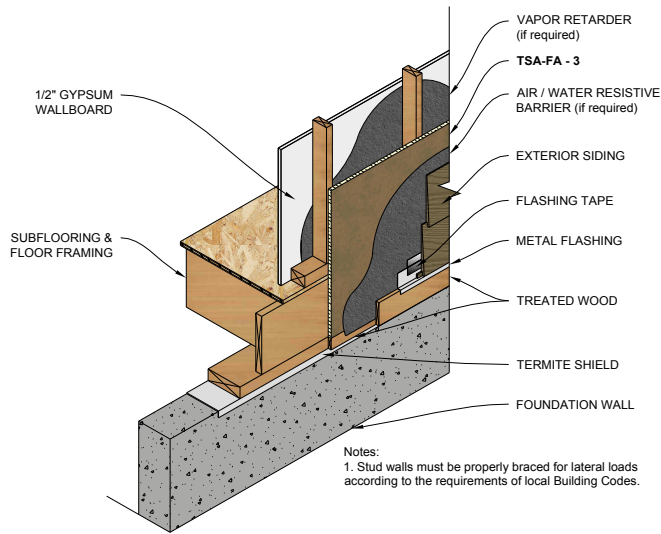


Masonry Wall Construction - TSA-FA-3 is applied to either the exterior or interior face of concrete or concrete masonry walls to provide a layer of continuous insulation (ci) over the entire surface. It may be secured to the inside face of a concrete or concrete masonry wall, over or under the furring strips, and covered with a minimum 1/2" gypsum wallboard interior finish. Adhesives may be used to hold the TSA-FA-3 in place against the wall temporarily. However, this attachment is temporary until the furring strips and gypsum wallboard are installed. The furring strips and gypsum wallboard must be secured with suitable screws or nails.

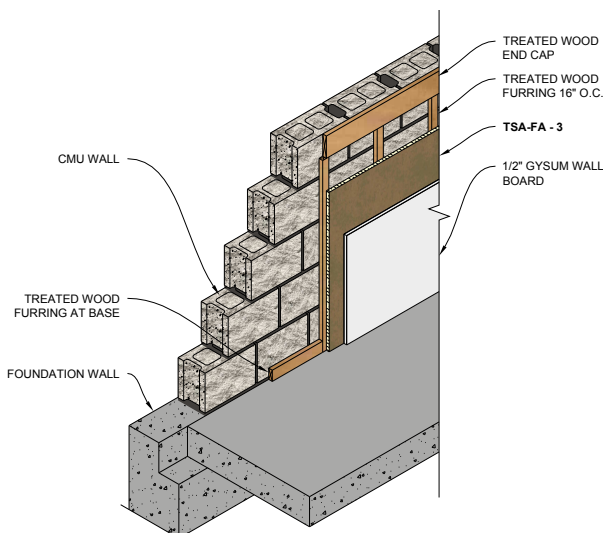


Exterior Stucco Construction - TSA-FA-3 may be used as the insulative sheathing under hard coat stucco finishes. It may be secured to the studs with bugle-head screws, galvanized roofing nails or common-nails driven through cap washers. Cover the TSA-FA-3 with a suitable separation layer such as an organic or inorganic felt. Then, attach conventional metal wire lath and expansion joints with appropriate fasteners as dictated by the local Building Code. Rmax does not recommend the direct attachment of stucco, such as Portland cement or polymer-modified types, directly to the face of the insulation product. Consult stucco manufacturers for details.

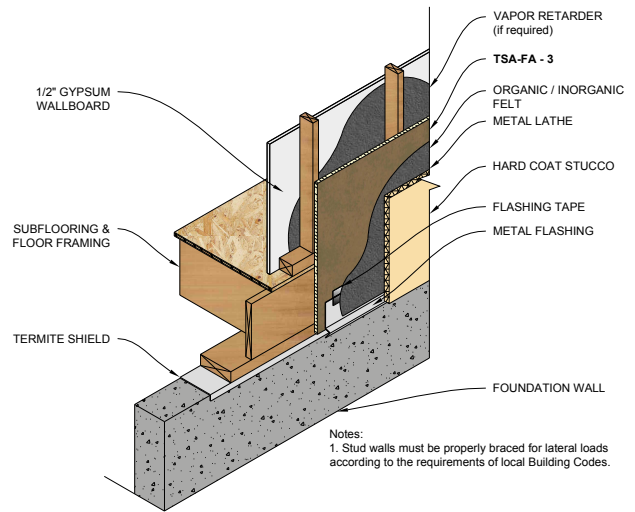

Re-Siding Construction - TSA-FA-3 may be used in retrofit construction provided the existing siding is sound and solidly attached. It is secured with galvanized nails of sufficient length to penetrate the old sidings, sheathings below and at least one inch into the existing wall studs. Then, cover the TSA-FA-3 with a suitable new siding of aluminum, vinyl, fiber cement, wood or wood fiber based products.

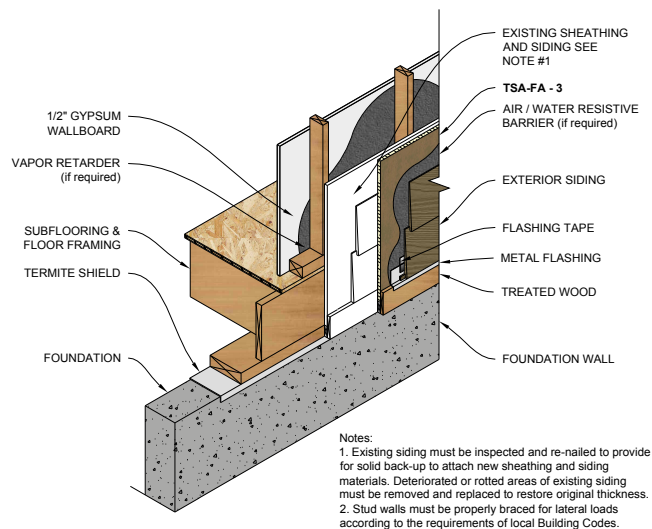


Vaulted Ceiling Construction - TSA-FA-3 may be applied to the inside face of the roof rafters in vaulted ceiling construction to provide a layer of continuous insulation (ci) and increase the R-value of the roof. Simply nail the TSA-FA-3 to the face of the rafter, cover with a minimum 1/2" gypsum wallboard and finish.

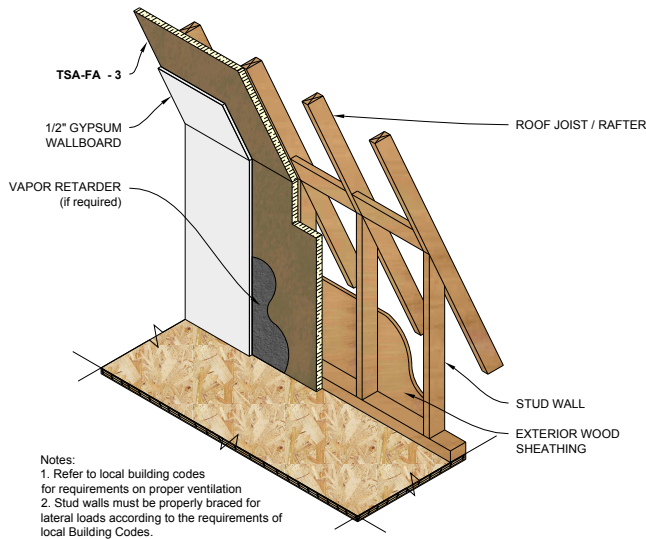

Attics and Crawl Spaces - TSA-FA-3 may be applied to the interior face of stud walls or roof rafters within attics and crawl spaces to provide a layer of continuous insulation (ci). Simply nail the TSA-FA-3 to the framing members and cover with an approved ignition barrier such as 3/8" gypsum wallboard or 1/4" wood structural panel, particle board or hardboard.

Roofing Construction - TSA-FA-3 is laid over a suitable roof deck such as tongue-and-groove timber, plywood or metal deck and covered with a suitable layer of plywood, wafer board or OSB. Asphalt or wood shingles, concrete or clay tiles or a standing seam metal roof may be installed over the insulated roof deck according to the roofing system instructions. **NOTE:** It may not be necessary to cover the insulation with a nailable surface when used under a standing seam metal roof assembly, consult manufacturer for details.

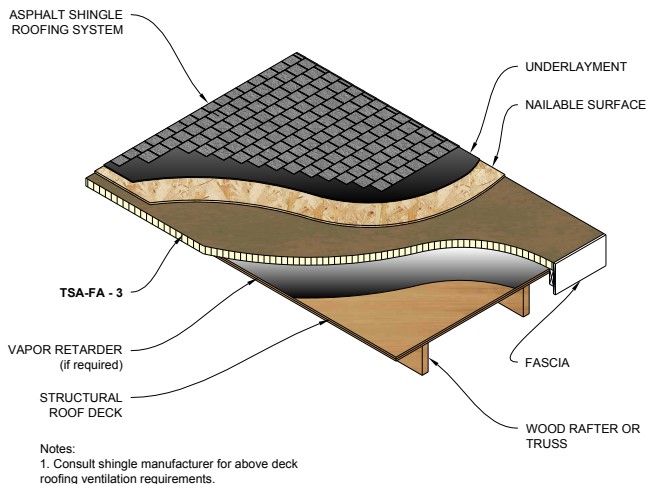

LIMITATIONS

TSA-FA-3 is not recommended, nor warranted, for use as a commercial roof insulation directly under membrane systems. Consult Rmax Sales for suitable commercial roof insulation products.

TSA-FA-3 is not a structural panel. It must not be used as a nailing base for any other building products. Furthermore, stud walls insulated with TSA-FA-3 must be properly braced for lateral loads according to the requirements of local Building Codes.

WARNING

DO NOT leave TSA-FA-3 exposed. Polyiso foam is an organic material which will burn when exposed to an ignition source of sufficient heat and intensity and may contribute to flames spreading.

Installations utilizing TSA-FA-3 must be fully protected on the interior side of the building by a thermal barrier such as a minimum of 1/2" gypsum wallboard. Masonry or concrete that is a minimum of 1" thick, plywood that is a minimum of 1/2" thick and wood that is a minimum of 1" nominal thickness may also be recognized as suitable thermal barriers. Consult your local Building Official for specific governing codes and requirements.

The interior and/or exterior of the building should be protected with a suitable vapor retarder and/or a water resistive barrier, if required, based on local Building Codes and climate zone.

WARRANTY

See Rmax "Sales Policy" for warranty conditions. Rmax does not assume any responsibility or liability for the performance of any products other than those manufactured by Rmax. **NOTE: All Rmax products must be tarped, placed on skids and kept dry before and throughout construction.**



Improving Your Design.

For warranties, limitations and conditions refer to Rmax Sales Policy and applicable warranties. All documents are located at www.rmax.com. For technical and sales support, email rmax@rmax.com or call (800) 527-0890.

Proudly Made and Engineered in the U.S.A.



Rmax Sales Offices and Plant Locations

Central:

13524 Welch Road
Dallas, Texas 75244

Phone: 972-387-4500
Fax: 972-387-4673
Toll Free: 1-800-527-0890

East:

1649 South Batesville Road
Greer, South Carolina 29650

Phone: 864-297-1382
Fax: 864-234-7548
Toll Free: 1-800-845-4455

West:

210 Lyon Drive
Fernley, Nevada 89408

Phone: 775-575-4849
Fax: 775-575-5035
Toll Free: 1-800-762-9462

E-mail us at rmax@rmax.com or visit our website www.rmax.com

