Rmax Thermaroof® Plus-3
Insulation for Above the Deck

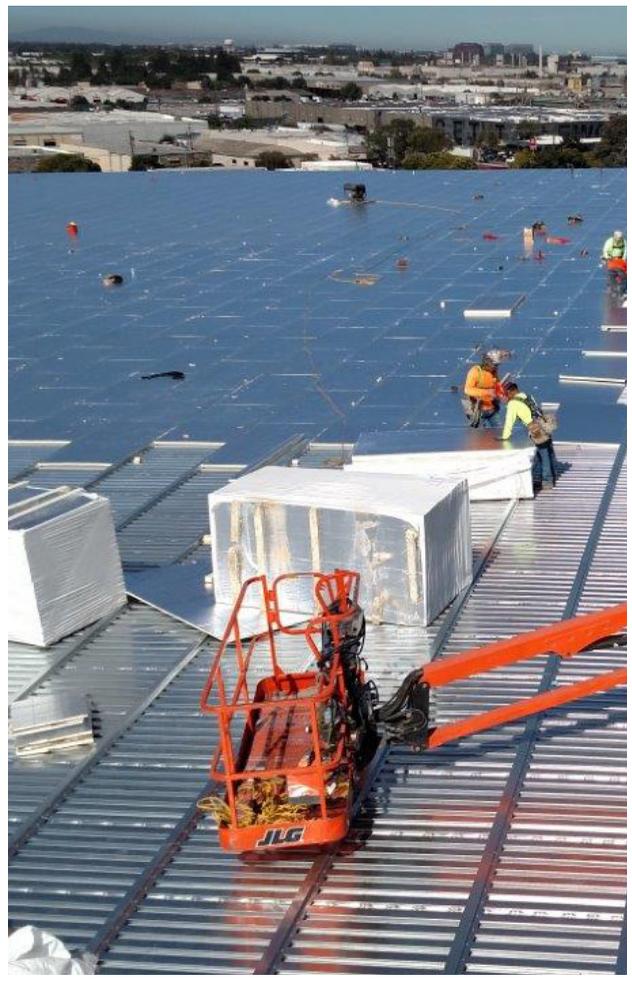Rmax Thermaroof® Plus-3 is an energy efficient thermal insulation board composed of a closed-cell polyisocyanurate (polyiso) foam core bonded to reinforced aluminum foil facers on both sides.

Thermaroof® Plus-3 is suitable for use in insulated roofing system constructions utilizing loose laid or mechanically fastened single ply membranes and metal panel roofing systems. Thermaroof® Plus-3 is approved for use in new roofing constructions and limited retrofit/recover roofing constructions over steel, wood, non-combustible and certain types of nailable roof decks.

This heavy-duty, foil-faced roof insulation provides maximum efficiency and can be installed without a thermal barrier.

Rmax Thermaroof® Plus-3 Benefits

- Delivers highest R-value per inch
- Saves on energy dollars
- No thermal barrier required
- 25 psi compressive strength available
- Reduces material and labor costs
- Contributes toward LEED® credits
- Offers tax credit, where applicable

Hanger 7 FBO - San Jose, California

For warranties, limitations and conditions refer to Rmax Sales Policy and applicable warranties. All documents are located at www.rmax.com. For technical support, email technical@rmax.com. For sales support, pricing and availability, email rmax@rmax.com or call (800) 527-0890.

Proudly Made and Engineered in the U.S.A.