


# Thermasheath®-XP: Insulation for Exposed Use

## Stud Wall Application

Thermasheath®-XP may be applied to the interior face of wood studs for additional thermal protection with a finished appearance. For example, Thermasheath®-XP is an excellent product for use in insulating walls or ceilings of garages. Simply fasten the Thermasheath®-XP directly to the wood framing.

Refer to Thermasheath®-XP data sheet for additional application/installation, compliances, thermal and physical properties, limitations and warnings.

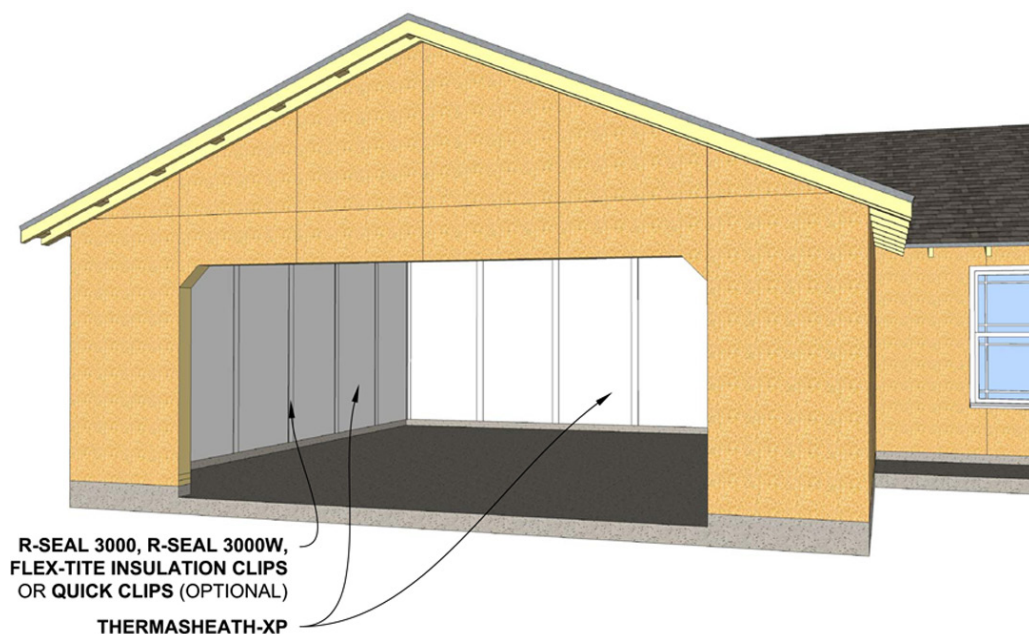

Notes:

1. Stud walls must be properly braced for lateral loads according to the requirements of local Building Codes.

*Warranty: See Rmax "Sales Policy" and "Fifteen Year Limited Thermal Warranty" for terms and conditions. Rmax does not assume any responsibility or liability for the performance of any products other than those manufactured by Rmax. **NOTE: All Rmax products must be tarped, placed on skids and kept dry before and throughout construction.***