



Thermasheath-XP

EXPOSING MORE WITH LESS


Thermasheath-XP is just one of the many Rmax products – providing a one-stop shop for all your residential insulation needs. Rmax’s engineered products and solutions allow for optimal energy efficiency and ease of construction, all while adding to the bottom line through both material and labor savings.

Rmax Thermasheath-XP has a closed-cell polyiso foam core, which is bonded on both sides with highly durable, embossed aluminum facers. This superior product can be left exposed on either the white modified acrylic coated side or the silver reflective clear coated side - offering visual flexibility and value.

Installed for use in wall or ceiling applications, Thermasheath-XP is ideal for basements, masonry or stud construction; attics and crawls spaces; sheds and other light storage structures. Not only is Thermasheath-XP designed for use without a thermal barrier to provide an attractive interior finish, it offers a thinner profile while still achieving required R-values - providing more insulation value for your dollar.

BENEFIT FROM VALUE

- 1"= R6, 1.55"= R10, 2"= R13.1
- Installed continuously to reduce heat loss or gain
- Meets R-value requirements with a thinner profile
- Blocks air and moisture
- Reduces energy costs
- Reflective side acts as a radiant barrier
- Pressure washable

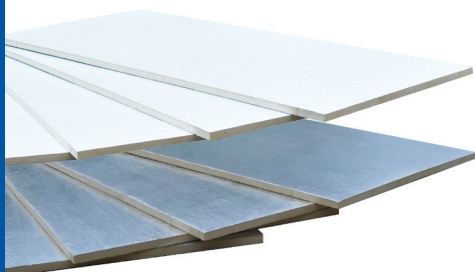

Thermasheath-XP is an excellent product for use in insulating the interior side of basement walls. It may be adhered or anchored directly to the concrete surface or attached to the furring strips.

JOINT TREATMENT

When used in walls or ceilings only, Thermasheath-XP does not require a joint treatment of any kind and can be tightly butted together. For a more finished look, tape the seams with R-SEAL 3000 for the silver side and R-SEAL 3000W for the white side, to ensure the best match.



Improving Your Design.

For warranties, limitations and conditions refer to Rmax Sales Policy and applicable warranties. All documents are located at www.rmax.com. For technical and sales support, email rmax@rmax.com or call (800) 527-0890.

Proudly Made and Engineered in the U.S.A.



Rmax Sales Offices and Plant Locations

Central:

13524 Welch Road
Dallas, Texas 75244

Phone: 972-387-4500
Fax: 972-387-4673
Toll Free: 1-800-527-0890

East:

1649 South Batesville Road
Greer, South Carolina 29650

Phone: 864-297-1382
Fax: 864-234-7548
Toll Free: 1-800-845-4455

West:

210 Lyon Drive
Fernley, Nevada 89408

Phone: 775-575-4849
Fax: 775-575-5035
Toll Free: 1-800-762-9462

E-mail us at rmax@rmax.com or visit our website www.rmax.com

