


Ultra-Max® HD: 1/2" High Density CoverBoard

Single Ply Applications

Fully Adhered, Mechanically Attached, and Loose Laid Ballasted Single Ply - Specify and install Ultra-Max® HD for use with single ply membranes. Where appropriate, secure cover board through the insulation layer to the structural roof deck using FM listed mechanical screw and plate fasteners. Refer to membrane manufacturer for required number of fasteners and fastening pattern to meet desired uplift requirements. Alternatively, adhere cover board (limited to 4'x4') using air-cured polyurethane adhesives as appropriate for approved deck and assembly. Joints shall be offset a minimum of 6" with insulation below.

Refer to Ultra-Max® HD data sheet for additional application/installation, compliances, thermal and physical properties, limitations and warnings.

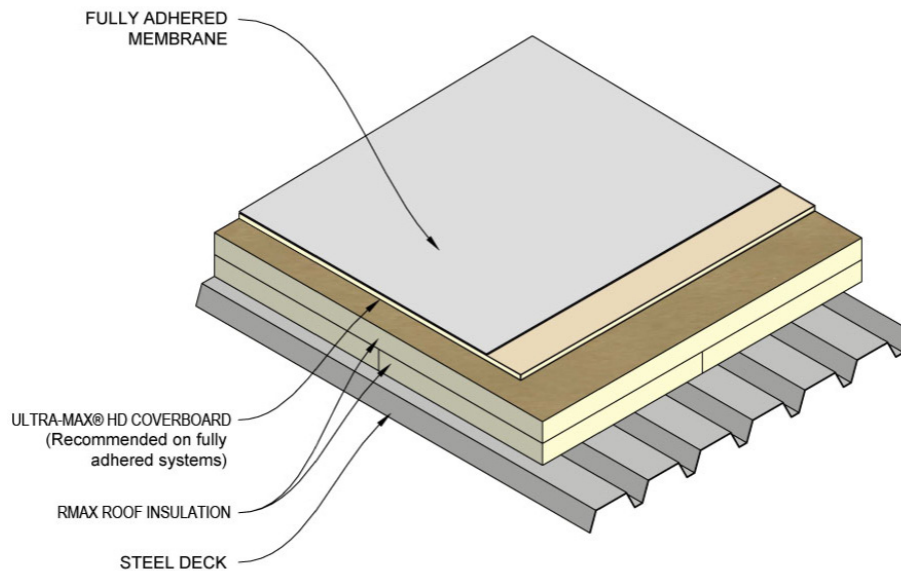

*Warranty: See Rmax "Sales Policy" and applicable warranties for terms and conditions. Rmax does not assume any responsibility or liability for the performance of any products other than those manufactured by Rmax. **NOTE: All Rmax products must be tarped, placed on skids and kept dry before and throughout construction. Requests for Certification Letters and/or special warranty considerations must be submitted to Rmax Sales prior to delivery of the products.***

2019-02