


FABROCK™ LT

Board Insulation for OEM Applications

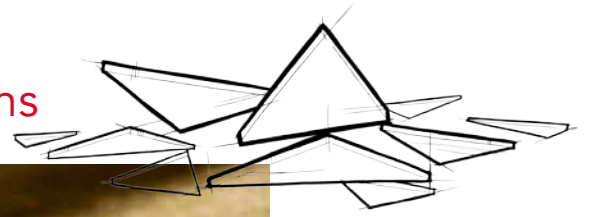

ROCKWOOL FABROCK™ LT is a semi-rigid stone wool insulation board designed to be fabricated into different dimensions to meet the aesthetic or functional needs of your application.

It is non-combustible and will not develop smoke or promote flame spread, even when directly exposed to fire. It also repels and drains water away from the product, and will completely dry out while maintaining its original physical properties.


The unique non-directional structure of ROCKWOOL stone wool insulation is denser than traditional insulations. This reduces airflow and sound transmissions. Higher airflow resistivity means better sound attenuation.

FABROCK™ LT is ideal as the base for laminated parking garage insulation solutions.

Learn more at rockwool.com

Versatility

FABROCK™ LT is easily fabricated for use in a variety of OEM applications. Our team of experts will work with you to create the right solution for your application.

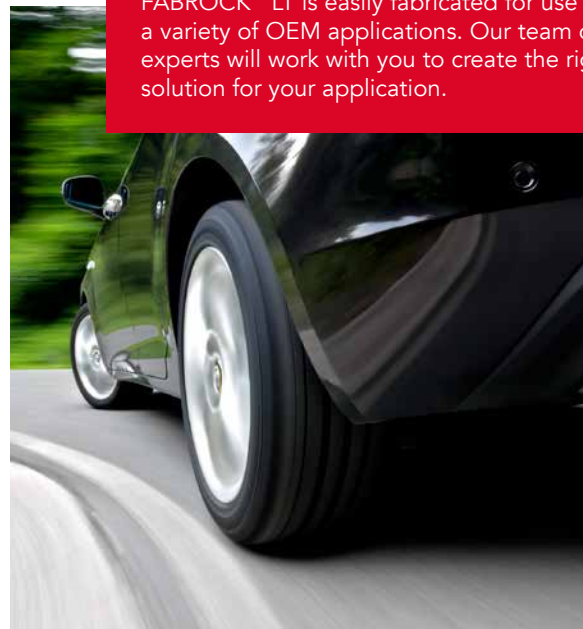

FABROCK™ LT

Board Insulation for OEM Applications

Technical Data Sheet

Board Insulation 15080* • Acoustic Board Insulation 09 81 13**
Mineral Wool Board Insulation 07 21 13**

ROCKWOOL FABROCK™ LT is a non-combustible, semi-rigid, water-repellent, stone wool insulation board designed for fabrication.

	Performance	Test Standard							
Compliance	Mineral Fiber Block and Board Thermal Insulation, Type IVB Compliant	ASTM C612							
Reaction to Fire	Flame spread index = 0; Smoke development index = 0 Flame spread index = 0; Smoke development index = 0 Behaviour of materials at 750°C - Non Combustible Test for Non-Combustibility - Non Combustible Hot Surface Performance - 1200°F	ASTM E84 (UL 723) CAN/ULC S102 CAN/ULC S114 ASTM E136 ASTM C411							
Density	Actual Density 3.5 lb/ft ³ (56 kg/m ³)	ASTM C303							
Dimensional Stability	Linear Shrinkage 0.35% @ 1200°F	ASTM C356							
Air Erosion	Maximum Air Velocity - 1000 fpm (5.08 m/s)	UL 181							
Corrosion Resistance	Stress Corrosion Cracking Tendency of Austenitic Stainless Steel - Passed Corrosion of Steel - Passed	ASTM C795 ASTM C665							
Thermal Resistance	R-Value / inch @ 75°F 4.1 hr.ft ² .F/Btu RSI value / 25.4 mm @ 24°C 0.72 m ² K/W	ASTM C518 (C177)							
Reaction to Moisture	Moisture Sorption by weight - 0.03% Determination of Fungi Resistance - Passed	ASTM C1104 ASTM C1338							
Thickness Dimensions	Contact ROCKWOOL for sizing information (1-800-265-6878)								
Acoustical Performance	Thickness	125 Hz	250 Hz	500 Hz	1000 Hz	2000Hz	4000 Hz	NRC	ASTM C423
	1.0"	0.08	0.23	0.66	0.93	1.02	1.02	0.7	
	1.5"	0.15	0.47	0.98	1.06	1.02	1.02	0.9	
	2"	0.26	0.68	1.14	1.13	1.06	1.07	1	
	3"	0.62	1.03	1.2	1.1	1.08	1.1	1.1	
Transmission Loss (dB)	Thickness	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	STC	ASTM E90
	2"	6	6	9	12	16	21	13	
	4"	8	7	13	17	23	28	17	

Issued 01-01-18
Supersedes 08-23-17

NOTE: *Master Format 1995 Edition **Master Format 2004 Edition. As ROCKWOOL has no control over installation design and workmanship, accessory materials or application conditions, ROCKWOOL does not warranty the performance or results of any installation containing ROCKWOOL's products. ROCKWOOL's overall liability and the remedies available are limited by the general terms and conditions of sale. This warranty is in lieu of all other warranties and conditions expressed or implied, including the warranties of merchantability and fitness for a particular purpose.



8024 Esquesing Line, Milton, ON L9T 6W3
Tel: 800-265-6878 • Fax: 800-991-0110
rockwool.com