


# SCOFIELD® Proguard™ Duracover™

Protect Your Floor from the Trades

## ■ Installed Floor Protection ■

### SCOFIELD Proguard Duracover:

- Oil and impact resistant.
- Suitable for interior use.
- Easy to install and remove.
- Use on Decorative Concrete, as well as Terrazzo, Ceramic Tile, Pavers, Wood, and Composite floors.

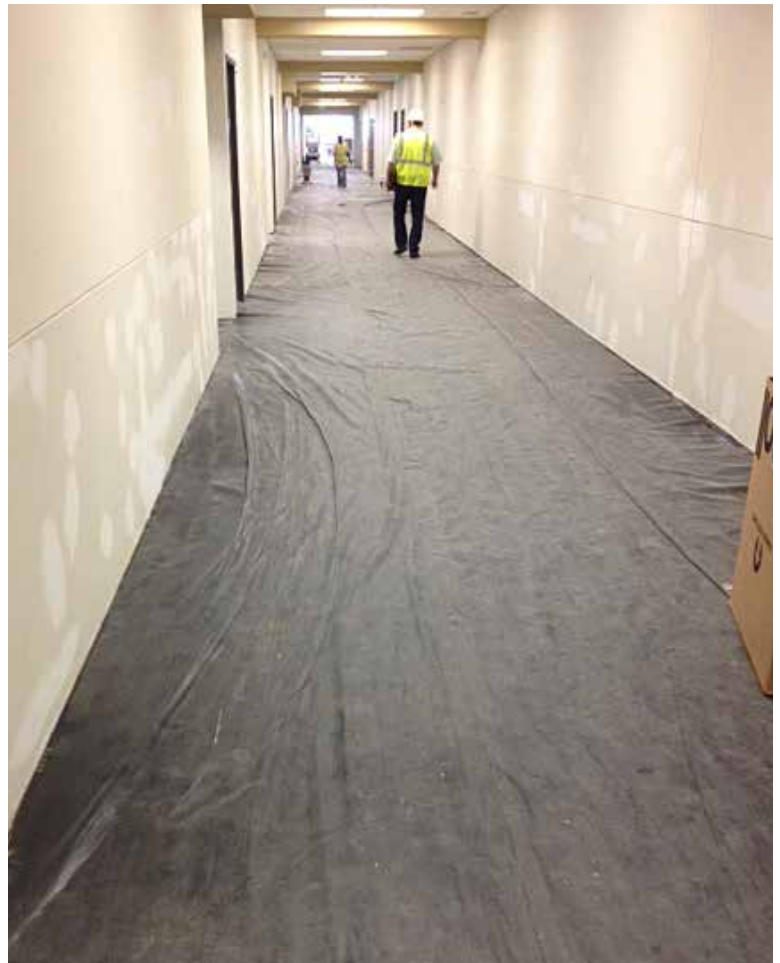

### Protect Your Concrete with Scofield Sealers

Scofield sealers protect the surface, enhance the appearance of colored concrete, and may provide protection against contamination and chemical attack by imparting a film-forming layer on the surface of the concrete. Consult a Scofield Concrete Cures & Sealers Guide.

Proguard Duracover is a multi-ply, textured floor protection membrane laminated with a non-woven polypropylene geotextile. It is available in 6 ft. x 150 ft. rolls and may be cut to fit using scissors or a utility knife. Proguard Duracover can be easily removed at the completion of the project, requiring minimal clean up.

# SCOFIELD® Proguard™ Duracover™

Protect Your Floor from the Trades

## ■ Installed Floor Protection ■

SCOFIELD® Proguard™ Duracover™ is a tough, durable composite material that will protect flooring from harsh construction environments both before and after installation. Proguard Duracover is flexible, and easy to place and remove at the completion of the project, requiring minimal clean up.

### Size:

- Rolls are 6 feet wide by 150 feet long. Material is 18 mils thick.
- SCOFIELD® Proguard™ Duracover™ Seaming Tape (roll) is 4 inches wide by 150 feet long.

### Weight:

- Approximately 45 lbs. per roll.

### Installation:

- Use on concrete that is a minimum of 3 days old.
- Use with shiny side up.
- When laying Proguard Duracover, overlap the edges by at least 2 inches.
- Use SCOFIELD Proguard Duracover Seaming Tape to tape overlapped seams.
- DO NOT APPLY SEAMING TAPE TO THE FLOOR ITSELF. IT WILL PERMANENTLY DAMAGE THE FLOOR.

### Removal:

- Use scissors or a utility knife to cut, making sure that the utility knife does not scar the floor that is being protected.
- Discard following local regulations for disposal.

### Keys to success:

- Tape down all seams with SCOFIELD Proguard Duracover Seaming Tape.
- DO NOT APPLY THE TAPE TO THE FLOOR ITSELF.
- Use only on fully cured coatings, consult the coating manufacturer's tech data bulletin for cure times before covering.
- Wipe up all spills immediately.
- Unrolling can develop static electric sparks. Ensure all flammable vapors from coating or flooring applications have dissipated prior to installation.

