



FLOOR COVERING INSTALLATION MATERIALS

MOISTURE MITIGATION, SUBFLOOR
PREPARATION, FLOORING ADHESIVES

PRODUCT GUIDE

RELIABLE SYSTEMS MAKE A DIFFERENCE

Time and again it has been proven that the quality of subfloor and the choice of the correct adhesive make all the difference. System selection dictates the end result. Projects easily become something to forget or something to showcase and make you proud! Sika® Secure System plays a critical role in the final appearance and service life of your installed floor.

Sika® is a world renowned market leader in cement, epoxy and polyurethane chemistry, rising above the competition. System solutions offered by Sika® include moisture barriers, self-leveling cementitious underlayment, and wood floor adhesives that have been proven in both refurbishment and new construction projects in commercial and residential construction.

SIKA® ICON CLASSIFICATION LEGEND

To help choose the best solution for your projects, Sika® has developed a classification system to define the performance and the features of each product. These icons help differ between products regarding curing speed, strength, special features and much more. Use this icon legend throughout this brochure for a better understanding of the products Sika® has to offer.



Depth



Flow




Speed



Strength



Smoothness




**Porous
Substrates**



**Non-porous
Substrates**



**Moisture
Barrier**



**MVER*
Tolerable**



Baseline



**Interior &
Exterior**



Ramp/Slope



Elongation




**Sound
Reduction**

*MVER: Moisture Vapor Emissions Rate

SIKA® SECURE SYSTEM

The Sika® Secure System has been developed to deliver the best Sika® solution to meet project needs and provide answers to everyday challenges. From moisture mitigation to underlayments, from patching and skimming, to various flooring adhesives, Sika® provides a total system package.

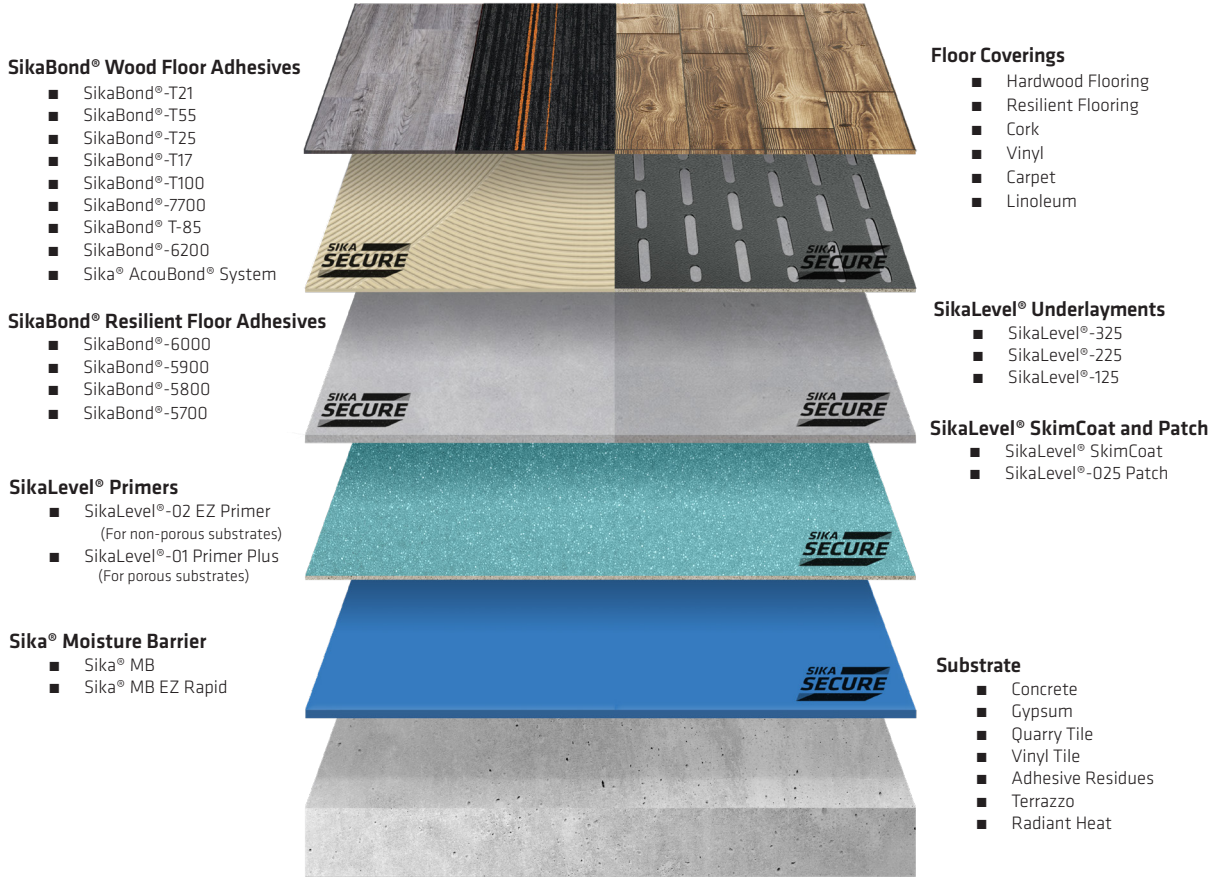

NOTES

Sika® Secure System Examples

Sika® Secure Standard



For standard turnaround: 2 days

Sika® Secure Rapid



For rapid turnaround: < 1 day

SIKA® MOISTURE BARRIERS

Sika® MB and Sika® MB EZ Rapid are solvent-free, low-viscosity moisture barriers for use under ALL flooring products, including wood, carpet, vinyl, LVT, self-leveling underlayments, floating floors, and other flooring systems that require protection from subfloor moisture.

Sika® MB



Moisture barrier, substrate consolidator and adhesion promoter two-component epoxy

- Water Vapor Permeability: 0.06
- Reduction in adhesive consumption
- Cures in 8 hours at 73°F

Tools: Nap roller **Color:** Blue


Packaging: 2.64 US. gal. pail

Coverage per pail:

- Moisture barrier: 250 - 300 sq.ft.
- Adhesion promoter or substrate consolidator: 400 - 450 sq.ft

Moisture Limitations:

- 100% RH, #25 CC, 6% Tramex



Sika® MB EZ Rapid



One-component, rapid-drying, polyurethane resin, moisture mitigation system and substrate solidifier

- 1 hour dry time
- Excellent adhesion promoter
- Low viscosity
- Compatible for glue-assist applications

Tools: Nap roller **Color:** Blue


Coverage:

- 1 Coat: 1000 sqft per jug - 400 sqft per gallon
- 2 Coat: 500 sqft per jug - 200 sqft per gallon

Packaging: 2.5 US. gal. pail

Moisture Limitations:

- 1 Coat: 93% RH, #12 CC
- 2 Coats: 98% RH, #18 CC



MOISTURE PROTECTION

WHERE TO USE

- Up to 100% RH, 25 lbs calcium chloride and under 6% Tramex
- Under any flooring system that requires protection from moisture



SUBSTRATE CONSOLIDATION

WHERE TO USE

- On weak or delicate substrates
- On old substrates
- Gypsum-based subfloors



ADHESION PROMOTION

WHERE TO USE

- Over old adhesive and residues
- Encapsulating asphalt based substrates including cutback
- Over old substrates



NOTES

[illegible]

SIKALEVEL® PRIMERS

SikaLevel® primers can be used on a wide range of substrates before the application of Sika® self-leveling cementitious products. These primers can reduce the absorbency of the substrates and improve the adhesion between the underlayment and the substrate.

SikaLevel®-01 Primer Plus



Primer for porous substrates. Reduces absorbency of the substrate

- Broom applied
- Reduces pinholes
- 10 minute dry time on concrete
- Can be diluted with water



Porous Substrates

Color: White
Tools: Broom or brush

Coverage: 600-1000 sq.ft.
dilution 1:3

Packaging: 1 US. gal. jug



SikaLevel®-02 EZ Primer



Primer for non-porous substrates. Provides optimum adhesion on tight substrates

- Nap roller applied
- Good skid resistant properties
- Short waiting time
- No dilution required




Non-Porous Substrates

Color: Mint
Tools: Nap roller

Coverage: 350 - 500 sq.ft.
Packaging: 1 US. gal. pail



SikaLevel®-01 Primer Plus

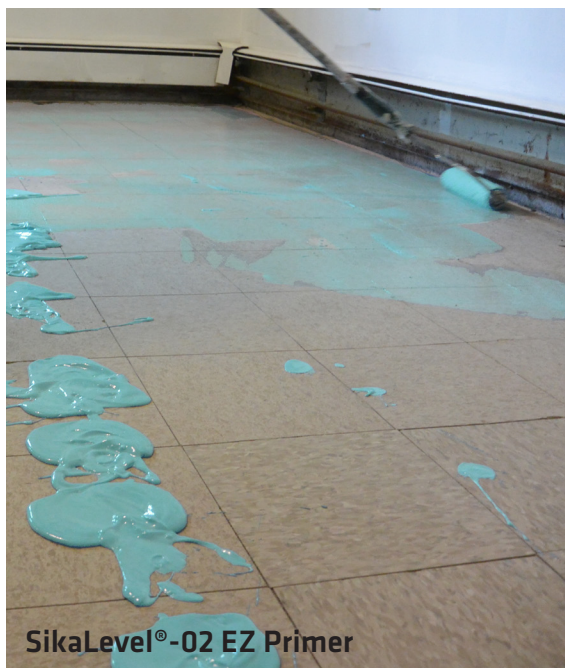

SikaLevel®-02 EZ Primer

NOTES

[illegible]

REPROFILING PATCH AND SKIMCOAT

SikaLevel® SkimCoat and SikaLevel®-025 Patch are fast-setting, polymer-modified, cement-based compounds that repair and re-profile concrete interior subfloors while providing a smooth finish prior to the installation of a floor covering. Sika® Latex R is a general purpose admixture which will produce polymer-modified concrete and mortar, as well as a bonding grout when mixed with sand and portland cement.

NOTES

SikaLevel®-025 Patch



Rapid Setting, Polymer Modified, Cement-based Patching Compound


- For patching and leveling from featheredge to 1/2"
- Foot traffic in 30 to 60 minutes
- Apply over difficult substrates

Coverage: 25-30 sqft. at 1/8" thickness

Packaging: 25 lb. bags



Smoothness



SikaLevel® SkimCoat



Fast setting, reprofiling mortar for use in feather edge applications before sensitive floor coverings


- Easy to use
- High adhesion
- No moisture limitations

Coverage: Approx. 110 sq.ft./bag

Packaging: 4 x 10 lb. bags/packs



MVER Tolerable



Sika® Latex R



Acrylic Latex Bonding Agent and Admixture for Portland Cement Mortars and Grouts


- Concrete/Mortar/Grout/etc. containing SikaLatex® R exhibits improved adhesion
- Increased adhesive strength of mortar/concrete when used as a bonding grout
- Increased resistance to freeze/thaw durability
- Does not produce a vapor barrier

Packaging: 1 and 5 gal. jugs

For use with: SikaLevel®-025 Patch

As admixture/mixing solution:

With mixer running, add SikaLatex® R and then the cement based product. Replace the amount of water recommended by the product. Do not dilute with water.

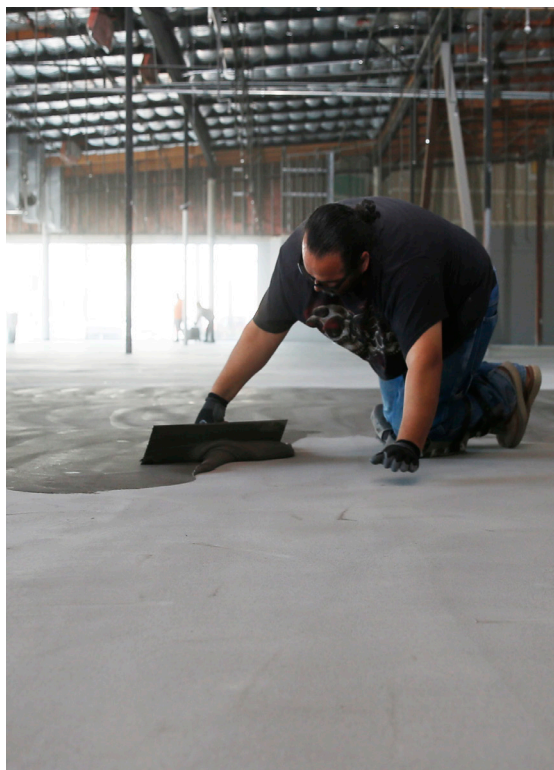

SIKALEVEL® - UNDERLAYMENTS



SikaLevel®-125

Durable self-leveling underlayment

- Economical
- Levels new and old floors

Coverage: 21 sq.ft. at 1/4" per bag

Packaging: 50 lb. bags



SikaLevel®-325



High performance self-leveling underlayment

- Interior & exterior use
- Deep pour
- High strength

Coverage: 26 sq.ft. at 1/4" per bag

Packaging: 55 lb. bags

NOTES




SikaLevel®-225

Premium self-leveling underlayment

- Superior flow
- Long workability
- Quick turnaround

Coverage: 28 sq.ft. at 1/4" per bag

Packaging: 55 lb. bags



Application Thickness

	Minimum	Maximum	With Aggregate
SikaLevel®-125	1/8"	1"	2"
SikaLevel®-225	1/16"	2"	3"
SikaLevel®-325	1/8"	3"	4"

Floor Covering Times

Compressive Strength

	Non Moisture Sensitive	Moisture Sensitive	28 Days
SikaLevel®-125	2 - 3 hours	1 - 3 days	4,000 psi
SikaLevel®-225	3 hours	16 hours	4,500 psi
SikaLevel®-325	4 hours	24 hours	5,300 psi

WOOD FLOOR ADHESIVES




SikaBond®-T55

Trowel Grade, Polyurethane Solid Wood Flooring Adhesive

- Elongation: 400%
- Tensile Strength: 217 psi at 73°F and 50% RH

Coverage: 45 - 50 sq.ft./gal as adhesive only

Packaging: 5 US. gal. pails



SikaBond®-T35


Trowel Grade, Polyurethane Wood Flooring Adhesive

- Elongation: 170%
- Tensile Strength: 150 psi at 73°F and 50% RH

Coverage: All-in-One: 30 - 35 sq.ft./gal.

Adhesive Only: 45 - 50 sq.ft./gal.

Packaging: 5 US. gal. pails



SikaBond®-T25

Trowel Grade, Polyurethane Wood Flooring Adhesive

- Elongation: 125%
- Tensile Strength: 150 psi at 73°F and 50% RH

Coverage: All-in-One: 30 - 35 sq.ft./gal.

Adhesive Only: 45 - 50 sq.ft./gal.

Packaging: 5 US. gal. pails



SikaBond®-T17

Trowel Grade, Polyurethane Wood Flooring Adhesive

- Elongation: 100%
- Tensile Strength: 150 psi at 73°F and 50% RH

Coverage: All-in-One: 30 - 35 sq.ft./gal.

Adhesive Only: 45-50 sq.ft./gal.

Packaging: 4 US. gal. pails




SikaBond®-6200

Pressure Sensitive Wood Flooring Adhesive

- Very easy to spread
- Increased spread rate and productivity

Coverage: Adhesive Only: 60 sq.ft./gal.

Packaging: 4 US. gal. pails



NOTES

[illegible]

SPECIALTY WOOD FLOOR ADHESIVES



SikaBond®-T21


All-in-One, Sound Control, Moisture Barrier Wood Flooring Urethane Adhesive

- Elongation: 270%
- Tensile Strength: 150 psi at 73°F and 50% RH
- Unlimited subfloor moisture vapor protection

Coverage: All-in-One: 30 - 35 sq.ft./gal. **Adhesive Only:** 45 - 50 sq.ft./gal.

Packaging: 4 US. gal. pails

Sound Ratings: ΔIIC: 21, **STC:** 63



SikaBond®-T100


All-in-One Hybrid, Sound Control, Moisture Barrier Wood Flooring Adhesive

- Elongation: 150%
- Tensile Strength: 150 psi at 73°F and 50% RH
- Unlimited subfloor moisture vapor protection
- Easily cleans off prefinished floors before and after cure

Coverage: All-in-One: 30 - 35 sq.ft./gal. **Adhesive Only:** 45 - 50 sq.ft./gal.

Packaging: 4 US. gal. pails

Sound Ratings: ΔIIC: 21, **STC:** 62, **IIC:** 67



SikaBond®-7700


All-in-One Hybrid, Sound Control, Moisture Barrier Wood Flooring Adhesive

- Elongation: ~125%
- Moisture control up to 15 lbs./90% RH
- Tensile Strength: 150 psi at 73°F and 50% RH
- Easily cleans off prefinished floors before and after cure

Coverage: All-in-One: 30 - 35 sq.ft./gal. **Adhesive Only:** 45 - 50 sq.ft./gal.

Packaging: 4 US. gal. pails

Sound Ratings: IIC: 74, **STC:** 62



SikaBond® T-85


All-in-One Hybrid, Sound Control, Moisture Barrier Wood Flooring Adhesive

- Elongation: ~100%
- Moisture control up to 12 lbs./85% RH
- Tensile Strength: 150 psi at 73°F and 50% RH
- Easy spread formula with excellent ridge retention

Coverage: All-in-One: 30 - 35 sq.ft./gal. **Adhesive Only:** 45 - 50 sq.ft./gal.

Packaging: 4 US. gal. pails

Sound Ratings: ΔIIC: 21, **STC:** 63



Application Guide

Product	Limitations for Moisture Control Application	Adhesive Only		Moisture Protection: 100% coverage is required		Provides Sound Control
		Engineered Wood Width	Solid Wood Width	Engineered Wood Width	Solid Wood Width	
SikaBond®-T21	Unlimited	No width limit	8"	No width limit	8"	Y
SikaBond®-T55	15# CC, 90% RH	No width limit	No Width limit	No width limit	8"	N
SikaBond®-T35	15# CC, 90% RH	No width limit	8"	No width limit	8"	N
SikaBond®-T25	12# CC, 87% RH	No width limit	5"	No width limit	5"	N
SikaBond®-T17	8# CC, 85% RH	No width limit	5"	No width limit	5"	N
SikaBond®-T100	Unlimited	No width limit	8"	No width limit	8"	Y
SikaBond®-7700	15# CC, 90% RH	No width limit	8"	No width limit	8"	Y
SikaBond® T-85	12# CC, 85% RH	No width limit	5"	No width limit	5"	Y
SikaBond®-6200	-	5"	-	-	-	N
Sika® AcouBond® System	-	No width limit	No Width limit	-	-	Y

RESILIENT FLOOR ADHESIVES




SikaBond®-6000

Premium Universal Firm-Set Acrylic Resilient Flooring Adhesive

- Installs vinyls, carpet tile, wall base, linoleum, rubber coverings, impact sound insulation underlayments, and more
- Moisture resistance up to 15 lbs./99% RH
- 18-month shelf-life

Coverage: 185-500 sq.ft./1.25 gal

Packaging: 4 and 1.25 US. gal. pails




SikaBond®-5900

Premium Pressure Sensitive Resilient Flooring Adhesive

- Installs LVT/LVP, vinyl sheet goods, WPC/SPC, rigid core planks, carpet tile, cork, rubber and more
- Moisture resistance up to 14 lbs./99% RH
- 2-year shelf-life

Coverage: 150-400 sq.ft./gal

Packaging: 4 and 1 US. gal. pails




SikaBond®-5800

Pressure Sensitive Resilient Flooring Adhesive

- Installs LVT/LVP, vinyl sheet goods, WPC/SPC, rigid core planks, carpet tile, cork, rubber and more
 - Moisture resistance up to 12 lbs./99% RH
 - 2-year shelf-life
- 

Coverage: 150-400 sq.ft./gal

Packaging: 4 and 1 US. gal. pails




SikaBond®-5700

Pressure Sensitive Resilient Flooring Adhesive

- Installs LVT, LVP, VCT, vinyl sheet goods, carpet tile, rubber flooring and cork/rubber underlayments
- Moisture resistance up to 10 lbs./90% RH
- 2-year shelf-life

Coverage: 150-400 sq.ft./gal

Packaging: 4 and 1 US. gal. pails



NOTES

[illegible]

ACOUSTICAL ABATEMENT & SPECIALTY SOLUTIONS

Sika® AcouBond® System



Elastic bonding and acoustical dampening for wood floors

- SikaBond®-T53 Elongation: 500%
- Tensile Strength: 174 psi at 73°F and 50% RH

Coverage: SikaBond®-T53 (adhesive):

1 unipac = 13.4 sq.ft.

20 unipacs = 269 sq.ft.

SikaLayer®-03 (acoustic mat):



1 roll = 269 sq.ft.

Packaging: SikaBond®-T53 (adhesive): 20 fl.oz.

unipac (case of 20)

SikaLayer®-03 (acoustic mat): Roll

Sound Ratings: Δ IIC: 24, STC: 63, IIC: 59

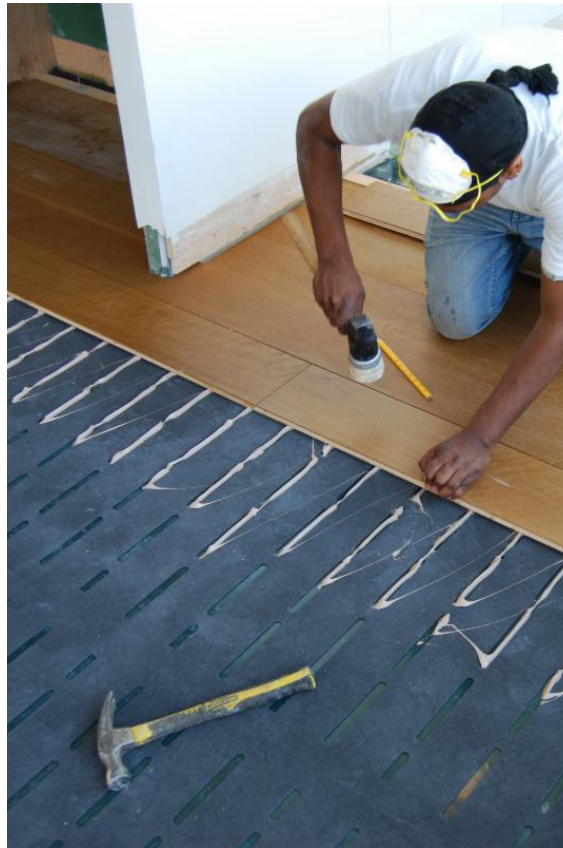

NOTES

SikaBond® Engineered Wood Floor Repair Kit



Engineered wood floor repair system

- Cleans up easy wet or dry
- Compact and easy to transport
- Saves time and money
- Reusable components

Components:


- 1 - One quart of repair adhesive
- 1 - 60cc plastic syringe assembly
- 2 - Applicator tips
- 2 - Drill bits
- 4 - Wooden dowels
- 1 - Dowel punch

Flooring Types:

- Multi-Ply engineered plank

Additional Refill Adhesive:

- One quart of repair adhesive
- One gallon of repair adhesive

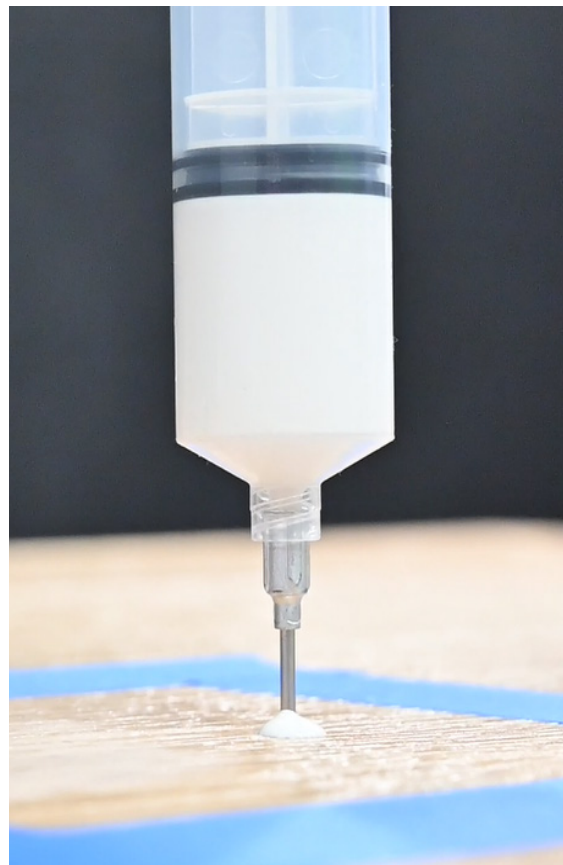

ACCESSORIES

Sikaflex® 11FC

Glue assist polyurethane adhesive

- Use to assist with nailing of flooring 5" and wider
- Apply using Cordon System or Serpentine System
- Highly elastic
- High strength durable adhesion



10.1 fl. oz. cartridge

Seals 12.4 lineal ft. of 1/2 x 1/4 in. bead

20 fl. oz. sausage

Seals 25 lineal ft. of 1/2 x 1/4 in. bead



SikaBond® -910

One-component, moisture cured, elastomeric polyurethane adhesive

- Versatile superior adhesion
- Remains permanently elastic
- Waterproof after cure



10.1 fl. oz. cartridge

Seals 12.4 lineal ft. of 1/2 x 1/4 in. bead

20 fl. oz. sausage

Seals 24 lineal ft. of 1/2 x 1/4 in. bead

29 fl. oz. cartridge

Seals 35 lineal ft. of 1/2 x 1/4 in. bead



SikaBond® -948 Low VOC

High-strength, high-solids polyurethane adhesive

- High green grab formula
- 1-2 hour firm set and quick dry capabilities
- Achieves a permanent overnight bond
- Low VOC and low odor



Packaging:

10 oz cartridges (24 per case);
29 oz cartridges (12 per case)



SikaBond® -900

Tongue & groove flooring adhesive

- Use for all types of laminate and floating wood floors
- Quick drying
- Easy clean up when wet
- Passes type II water resistance



16 fl. oz. bottle

100-150 lineal ft.



SikaBond® Remover

Fast drying solvent cleaner

- Ideal for SikaBond® urethane adhesives even after curing
- Does not leave "ghosting" on wood floor finish
- Leaves no residue
- Low odor

Packaging: 1 pint bottles;
12 per case



Application Tools

Manual drive and pneumatic caulk guns for dispensing 20 oz. adhesive sausages



Flooring trowels for successful application of flooring adhesives

- **P5 Trowel:** Adhesive Only Applications (45-50 sq.ft./gal.)
- **SC+MB Trowel:** All-in-One Applications (30-35 sq.ft./gal.)
- **TR-2:** Flat V Notch (60 sq. ft./gal.)
- **TR-10:** V Notch (30-35 sq. ft./gal.)
- **TR-11:** V Notch (30 sq. ft./gal.)

NOTES

WARRANTY

Product Category	Product Name	Carpet, Sheet Vinyl, LVT & Wood Floors
Moisture Barriers	Sika® MB Sika® MB EZ Rapid	Equal to the Floor Covering Manufacturer's Warranty Period
Primers	SikaLevel®-01 Primer Plus SikaLevel®-02 EZ Primer	
Self Leveling Compounds	SikaLevel® SkimCoat SikaLevel®-025 Patch SikaLevel®-125 SikaLevel®-225 SikaLevel®-325	
Flooring Adhesives	SikaBond®-5900, SikaBond®-5800, SikaBond®-5700 SikaBond®-6000 Sika® AcouBond® System SikaBond®-6200 SikaBond®-T17 SikaBond®-T21 SikaBond®-T25 SikaBond®-7700, SikaBond®-T-85 SikaBond®-T55, SikaBond®-T35 SikaBond®-T100	
Sound Abatement	Sika® Acoubond® System	

WHAT DOES THE SIKA SECURE WARRANTY COVER?

Labor and Materials are covered by the Sika® Secure Warranty. To get the benefit of a Sika® Limited Material and Labor Warranty you must first fulfill the warranty application requirements.

In the event of a valid claim under this Warranty, Sika® in its discretion will either pay the reasonable cost of labor and materials to repair or replace on a square foot basis the portion of the floor proven to be defective due to a defect in the Sika® Product(s) subject to exclusions as set in the Warranty. Sika® will repair or replace the affected floor one time only. Any repairs made prior to Sika® evaluating the claim will void this Warranty. Please contact your local Sika® Sales Representative for more information and warranty requirements.

HOW ARE THE TERMS OF THE “SIKA SECURE WARRANTY” DEFINED?

The Sika® Secure Warranty length is defined as a period of time equal to the flooring manufacturer's warranty period.

If no flooring manufacturer's warranty applies, “Sika Secure Warranty” is defined as a period of time not to exceed **25 years for wood floors or other floor covering systems**.

PRODUCT SELECTION CHART

	Product	Description	Floor Coverings								
			Engineered Wood	Solid Shorts	Solid Wood	Ceramic Tile	Vinyl Tile (VCT, LVT, etc.)	Cork/Rubber Underlay-ment	Floating Floors	Residential Carpet Pad	Linoleum
Moisture Barriers & Primers	Sika® MB	Moisture barrier, substrate consolidator and adhesion promoter two-component epoxy	■	■	■	■	■	■	■	■	■
	Sika® MB EZ Rapid	One-component, rapid-drying, polyurethane resin, moisture mitigation system and substrate solidifier	■	■	■	■	■	■	■	■	■
	SikaLevel®-01 Primer Plus	Primer for porous substrates & protection against moisture from leveling compounds	■	■	■	■	■	■	■	■	■
	SikaLevel®-02 EZ Primer	Primer for non-porous substrates. Provides optimum adhesion on tight substrates	■	■	■	■	■	■	■	■	■
Self Leveling Underlayments & Patches	SikaLevel®-125	Durable, cementitious, self-leveling underlayment	■	■	■	■	■	■	■	■	■
	SikaLevel®-225	Superior flow, cementitious, self-leveling underlayment	■	■	■	■	■	■	■	■	■
	SikaLevel®-325	High strength, cementitious, self-leveling underlayment	■	■	■	■	■	■	■	■	■
	SikaLevel®-025 Patch	Rapid Setting Cement-based Patching Compound from feather edge up to 1/2"	■	■	■	■	■	■	■	■	■
	SikaLevel® SkimCoat	Fast Setting Cement-based Patching Compound from feather edge up to 1/2"	■	■	■	■	■	■	■	■	■
Adhesives	SikaBond®-T55	High elongation polyurethane adhesive for solids and dimensionally unstable woods	■	■	■			■			
	SikaBond®-T35	Trowel grade highly elastic polyurethane adhesive	■	■	■			■			
	SikaBond®-T25	Trowel grade easy to use polyurethane adhesive	■	■	■			■			
	SikaBond®-T17	Economical, polyurethane engineered wood flooring adhesive	■	■	■			■			
	SikaBond®-T21	All-in-one polyurethane adhesive for moisture and sound protection	■	■	■			■			
	SikaBond®-T100; SikaBond®-7700; SikaBond® T-85	All-in-One hybrid polyurethane, sound control, moisture barrier wood flooring adhesive	■	■	■			■			
	SikaBond®-6200	Pressure sensitive wood flooring adhesive	■	■	■			■			
	SikaBond®-5900; SikaBond®-5800; SikaBond®-5700;	Pressure sensitive resilient flooring adhesive					■	■		■	■
	SikaBond®-6000	Premium universal firm-set acrylic resilient flooring adhesive					■	■		■	■
	Sika® Acoubond® System	Elastic bonding and acoustical dampening for wood floors	■	■	■						

Always refer to flooring manufacturer's recommendations and technical guidelines if substrate unknown. Mock-ups for bond and compatibility test are required.

Substrates											Advantages	
Concrete	Gypsum	Self Leveler + Patching	Plywood	Quarry Tiles	Vinyl Tile (VCT, LVT, etc.)	Asphaltic Cutback	Adhesive Residues	Terrazzo	Radiant Heat	Rubber Underlayment	Moisture Protection	Sound Reduction
■	■	■	■	■	■	■**	■**	■*	■		■	
■	■	■	■	■	■	■*	■*	■*	■		■	
■	■	■							■			
■			■	■	■		■	■	■			
■*	■*	■*	■*	■*	■*	■*or*	■*or*	■*	■*			
■*	■*	■*	■*	■*	■*	■*or*	■*or*	■*	■*			
■*	■*	■*	■*	■*	■*	■*or*	■*or*	■*	■*			
■	■*	■	■	■	■*	■*	■*	■	■			
■	■*	■	■	■	■*	■*	■*	■	■			
■	■*	■	■	■*	■**	■*	■*	■*	■	■		
■	■*	■	■	■*	■**	■*	■*	■*	■	■	■	
■	■*	■	■	■*	■**	■*	■*	■*	■	■	■	
■	■*	■	■	■*	■**	■*	■*	■*	■	■	■	
■	■*	■	■	■*	■**	■*	■*	■*	■	■	■	■
■	■*	■	■	■*	■**	■*	■*	■*	■	■	■	■
■	■	■	■	■*	■**	■*	■*	■*	■	■	■	
■	■	■	■	■*	■**	■*	■*	■*	■	■	■	
■	■	■	■	■*	■**	■*	■*	■*	■	■	■	
■	■*	■	■	■*	■**	■*	■*	■*	■			■

SIKA SECURE

MAKE YOUR FLOOR SIKA SECURE

For more information, contact Sika: Phone: 1-800-933-SIKA (Nationwide), Website: www.sikasecure.com



Our most current General Sales Conditions shall apply. Please consult the Product Data Sheets prior to any use and processing.

SIKA CORPORATION

201 Polito Avenue
Lyndhurst, NJ 07071
Phone: 201-933-8800
Fax: 201-933-6225

SIKA CANADA INC.

601 Delmar Avenue
Pointe Claire
Quebec H9R 4A9
Phone: 514-697-2610
Fax: 514-694-2792

SIKA MEXICANA S.A. DE C.V.

Carretera Libre Celaya Km. 8.5
Fracc. Industrial Balvanera
Corregidora, Queretaro
C.P. 76920
Phone: 52 442 2385800
Fax: 52 442 2250537

BUILDING TRUST

