

SikaBit® S-60 SELF ADHERING SHEET WATERPROOFING MEMBRANE

- Easy to install, self-adhesive overlap ensures installation quality
- Controlled thickness, minimizes opportunity for job site error
- Flexible, handles shrinkage movement and minor settlement
- Cross-laminated film, great stability and resistance to puncture and tearing
- Cold applied, no heat necessary for installation



SikaBit® S-60 SELF ADHERING SHEET WATERPROOFING MEMBRANE

TYPICAL APPLICATIONS:


- Commercial / Educational
- Parking Garages
- Pedestrian Tunnels
- Hotels/Residential
- Warehouses
- Production Facilities

PRODUCT /SYSTEM OVERVIEW:

SikaBit® S-60 is a proprietary composite, uniquely designed to provide high strength, low temperature adhesion and high temperature stability in a superior waterproofing membrane. A tough cross-laminated film forms a resilient barrier against physical damage and water migration. It is a cold applied system requiring no heat or special equipment to install.

SikaBit® S-60 is ideal for waterproofing below grade concrete, masonry structures and wood surfaces where in-service temperatures will not exceed 130°F. It can also be applied to split slab construction both above and below grade as well as earth sheltered structures.

SikaBit® S-60 is available in 200sf rolls. Each roll is 3ft x 66.7ft

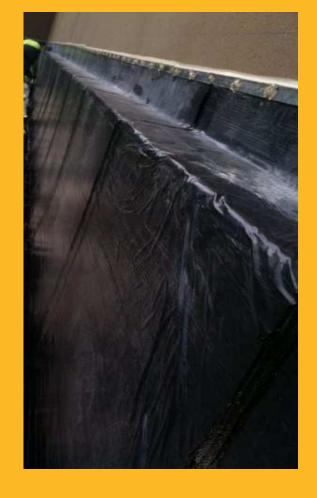



FOR MORE SikaBit® S-60 INFORMATION:

Contact Sika Waterproofing Team 800.325.9504 ■ Website usa.sika.com

*For up to date and accurate information please consult the current Product Data Sheet at usa.sika.com







SIKA CORPORATION 3400 Tree Court Industrial Blvd. St. Louis, MO 63122 Phone: 800.325.9504







opyright 2014. Sika Corpor