



# Strong-Bolt® 2 Design Information – Concrete



- Strong-Bolt 2 (STB2) has been tested per ACI 355.2 and AC193.
- These tables provide tension and shear capacities for design using strength level or allowable load capacities. The footnotes of each table further explain how the design strength capacities were calculated and what factors were used to calculate the allowable load capacities. For additional information, please refer to Anchor Designer software and or contact Simpson Strong-Tie.

## Table of Contents

Icons and Nomenclature .....	3
Carbon Steel Strong-Bolt® 2 Tension Design Strength in Normal-Weight Concrete .....	4
Carbon Steel Strong-Bolt® 2 Allowable Tension Loads in Normal-Weight Concrete:	
• Static Load .....	5
• Wind Load .....	5
• Seismic Load .....	6
Carbon Steel Strong-Bolt® 2 Shear Design Strengths in Normal-Weight Concrete .....	7
Carbon Steel Strong-Bolt® 2 Allowable Shear Loads in Normal-Weight Concrete:	
• Static Load .....	8
• Wind Load .....	8
• Seismic Load .....	9
Carbon Steel Strong-Bolt® 2 Tension Design Strength in Soffit of Normal-Weight or Sand-Lightweight Concrete-Filled Profile Steel Deck Assemblies .....	10
Carbon Steel Strong-Bolt® 2 Tension Design Strength in Soffit of Normal-Weight or Sand-Lightweight Concrete-Filled Profile Steel Deck Assemblies:	
• Static Load .....	10
• Wind Load .....	11
• Seismic Load .....	11



# Strong-Bolt® 2 Design Information – Concrete

Stainless Steel Strong-Bolt® 2 Tension Design Strength in Normal-Weight Concrete ..... 12

Stainless Steel Strong-Bolt® 2 Allowable Tension Loads in Normal-Weight Concrete:

- Static Load ..... 13
- Wind Load ..... 13
- Seismic Load ..... 14

Stainless Steel Strong-Bolt® 2 Shear Design Strengths in Normal-Weight Concrete ..... 15

Stainless Steel Strong-Bolt® 2 Allowable Shear Loads in Normal-Weight Concrete:

- Static Load ..... 16
- Wind Load ..... 16
- Seismic Load ..... 17

Stainless Steel Strong-Bolt® 2 Tension Design Strength in Soffit of Normal-Weight or Sand-Lightweight Concrete-Filled Profile Steel Deck Assemblies ..... 18


Stainless Steel Strong-Bolt® 2 Allowable Tension Loads in Soffit of Normal-Weight or Sand-Lightweight Concrete-Filled Profile Steel Deck Assemblies:

- Static Load ..... 18
- Wind Load ..... 19
- Seismic Load ..... 19

# Strong-Bolt® 2 Design Information – Concrete

## Icons and Nomenclature


In order to facilitate easier identification of performance data, the following icon system has been incorporated into the sections of the technical bulletin with multiple load tables. These icons will appear in the heading of the table to promote easier visual identification of the type of load, insert type and substrate addressed in the table. Icons are intended for quick identification. All specific information regarding suitability should be read from the table itself.




**Normal-Weight  
Concrete**



**Normal-Weight/  
Lightweight Concrete  
over Metal Deck**



**Tension Load**



**Shear Load**



**Valid for  
International  
Building Code**

$C_{ac}$	Critical Edge Distance
$C_{min}$	Minimum Edge Distance
$f'_c$	Concrete Compressive Strength
$h_{nom}$	Nominal Embedment Depth
$h_{min}$	Minimum Concrete Thickness


# Strong-Bolt® 2 Design Information – Concrete

Carbon Steel Strong-Bolt® 2 Tension Design Strength in Normal-Weight Concrete ( $f'_c = 2,500$  psi)




Anchor Dia. (in.)	Nominal Embed. Depth (in.)	Min. Concrete Thickness $h_{min}$ (in.)	Critical Edge Distance $c_{ac}$ (in.)	Minimum Edge Distance $c_{min}$ (in.)	Tension Design Strength (lb.)								
					Edge Distances = $c_{ac}$ on all sides				Edge Distances = $c_{min}$ on one side and $c_{ac}$ on three sides				
					SDC A-B		SDC C-F		SDC A-B		SDC C-F		
					Uncracked	Cracked	Uncracked	Cracked	Uncracked	Cracked	Uncracked	Cracked	
1/4	1 3/4	3 1/4	2 1/2	1 3/4	1,435	—	—	—	—	1,070	—	—	—
3/8	1 7/8	3 1/4	6 1/2	6	1,435	845	1,075	635	1,325	845	990	635	
	2 7/8	4 1/2	6	6	2,170	1,805	1,630	1,355	2,170	1,805	1,630	1,355	
1/2	2 1/4 <sup>8</sup>	4	6	6	1,805	—	—	—	1,805	—	—	—	
	2 3/4	4	6	6	2,350	1,865	1,760	1,400	2,350	1,865	1,760	1,400	
	3 7/8	6	7 1/2	4	3,415	3,240	2,560	2,430	2,740	2,875	2,055	2,155	
5/8	2 3/4 <sup>8</sup>	5 1/2	7 1/2	6 1/2	2,720	—	—	—	2,355	—	—	—	
	3 3/8	5 1/2	7 1/2	6 1/2	3,555	2,520	2,665	1,890	3,085	2,520	2,310	1,890	
	5 1/8	7 7/8	9	6 1/2	5,865	4,480	4,400	3,360	5,420	4,480	4,065	3,360	
3/4	3 3/8 <sup>8</sup>	6	6	4 1/4	3,730	—	—	—	2,640	—	—	—	
	4 1/8	6	6	4 1/4	4,625	3,425	3,470	2,570	3,570	3,000	2,680	2,250	
	5 3/4	8 3/4	8	4 1/4	5,765	5,525	4,325	4,145	5,570	4,210	4,180	3,155	
1	5 1/4	9	18	8	4,600	4,235	3,450	3,175	2,800	4,235	2,100	3,175	
	9 3/4	13 1/2	13 1/2	8	5,330	6,150	3,995	4,615	5,330	6,150	3,995	4,615	

1. Tension design strengths (SD level) are based on the strength design provisions of ACI 318-14 Chapter 17.
2. Tabulated values are for a single anchor with no influence of another anchor.
3. Interpolation between embedment depths is not permitted.
4. Strength reduction factor,  $\phi$ , is based on using a load combination from ACI 318-14 Section 5.3.
5. The tension design strength listed for SDC (Seismic Design Category) A-B may also be used in SDC C-F when the tension component of the strength-level seismic design load on the anchor does not exceed 20% of the total factored tension load on the anchor associated with the same load combination.
6. When designing anchorages in SDC C-F, the designer shall consider the ductility requirements of ACI 318-14 Section 17.2.3.
7. Tension design strengths in SDC C-F have been adjusted by 0.75 factor in accordance with ACI 318-14 Section 17.2.3.4.4.
8. Tabulated values for this embedment depth are based on internal testing and they are not listed in ICC-ES ESR-3037.
9. The Designer of Record is responsible for the foundation design.

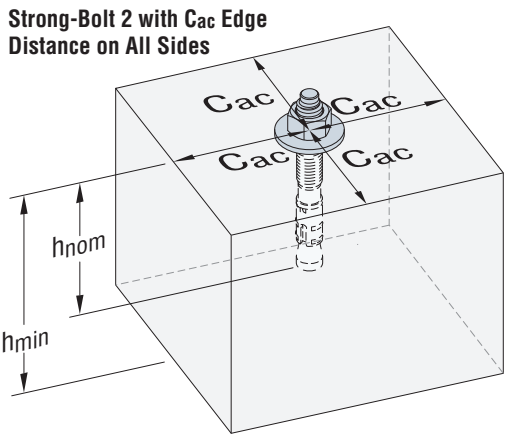

Flat Slab

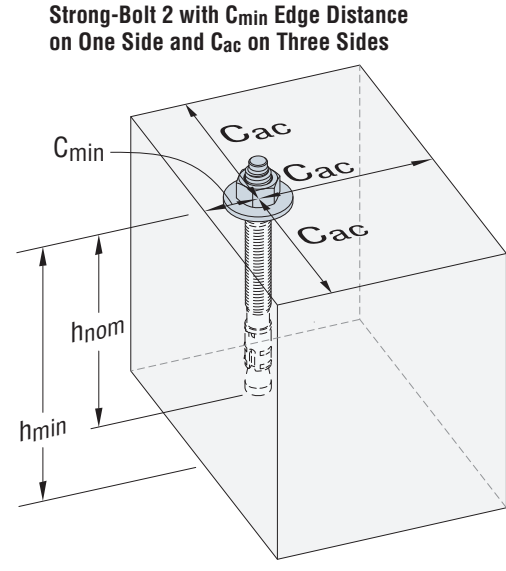

Flat Slab

\* See page 3 for an explanation of the load table icons.



# Strong-Bolt® 2 Design Information – Concrete

Carbon Steel Strong-Bolt® 2 Allowable Tension Loads in Normal-Weight Concrete ( $f'_c = 2,500$  psi)  
 – Static Load



Anchor Dia. (in.)	Nominal Embed. Depth (in.)	Min. Concrete Thickness $h_{min}$ (in.)	Critical Edge Distance $c_{ac}$ (in.)	Minimum Edge Distance $c_{min}$ (in.)	Allowable Tension Load (lb.)			
					Edge Distances = $c_{ac}$ on all sides		Edge Distances = $c_{min}$ on one side and $c_{ac}$ on three sides	
					Uncracked	Cracked	Uncracked	Cracked
1/4	1 3/4	3/4	2 1/2	1 3/4	1,025	—	765	—
3/8	1 7/8	3/4	6 1/2	6	1,025	605	945	605
	2 7/8	4 1/2	6	6	1,550	1,290	1,550	1,290
1/2	2 1/4 <sup>4</sup>	4	6	6	1,290	—	1,290	—
	2 3/4	4	6	6	1,680	1,330	1,680	1,330
	3 7/8	6	7 1/2	4	2,440	2,315	1,955	2,055
5/8	2 3/4 <sup>4</sup>	5 1/2	7 1/2	6 1/2	1,945	—	1,680	—
	3 3/8	5 1/2	7 1/2	6 1/2	2,540	1,800	2,205	1,800
	5 1/8	7 7/8	9	6 1/2	4,190	3,200	3,870	3,200
3/4	3 3/8 <sup>4</sup>	6	6	4 1/4	2,665	—	1,885	—
	4 1/8	6	6	4 1/4	3,305	2,445	2,550	2,140
	5 3/4	8 3/4	8	4 1/4	4,120	3,945	3,980	3,005
1	5 1/4	9	18	8	3,285	3,025	2,000	3,025
	9 3/4	13 1/2	13 1/2	8	3,805	4,395	3,805	4,395

1. Allowable tension loads are calculated based on the strength design provision of ACI 318-14 Chapter 17 using a conversion factor of  $\alpha = 1.4$ . The conversion factor  $\alpha$  is based on the load combination 1.2D + 1.6L assuming 50% dead load and 50% live load:  $1.2(0.5) + 1.6(0.5) = 1.4$ .
2. Tabulated values are for a single anchor with no influence of another anchor.
3. Interpolation between embedment depths is not permitted.
4. Tabulated values for this embedment depth are based on internal testing and they are not listed in ICC-ES ESR-3037.
5. The Designer of Record is responsible for the foundation design.

Carbon Steel Strong-Bolt® 2 Allowable Tension Loads in Normal-Weight Concrete ( $f'_c = 2,500$  psi)  
 – Wind Load



Anchor Dia. (in.)	Nominal Embed. Depth (in.)	Min. Concrete Thickness $h_{min}$ (in.)	Critical Edge Distance $c_{ac}$ (in.)	Minimum Edge Distance $c_{min}$ (in.)	Allowable Tension Load (lb.)			
					Edge Distances = $c_{ac}$ on all sides		Edge Distances = $c_{min}$ on one side and $c_{ac}$ on three sides	
					Uncracked	Cracked	Uncracked	Cracked
1/4	1 3/4	3/4	2 1/2	1 3/4	860	—	640	—
3/8	1 7/8	3/4	6 1/2	6	860	505	795	505
	2 7/8	4 1/2	6	6	1,300	1,085	1,300	1,085
1/2	2 1/4 <sup>4</sup>	4	6	6	1,085	—	1,085	—
	2 3/4	4	6	6	1,410	1,120	1,410	1,120
	3 7/8	6	7 1/2	4	2,050	1,945	1,645	1,725
5/8	2 3/4 <sup>4</sup>	5 1/2	7 1/2	6 1/2	1,630	—	1,415	—
	3 3/8	5 1/2	7 1/2	6 1/2	2,135	1,510	1,850	1,510
	5 1/8	7 7/8	9	6 1/2	3,520	2,690	3,250	2,690
3/4	3 3/8 <sup>4</sup>	6	6	4 1/4	2,240	—	1,585	—
	4 1/8	6	6	4 1/4	2,775	2,055	2,140	1,800
	5 3/4	8 3/4	8	4 1/4	3,460	3,315	3,340	2,525
1	5 1/4	9	18	8	2,760	2,540	1,680	2,540
	9 3/4	13 1/2	13 1/2	8	3,200	3,690	3,200	3,690

1. Allowable tension loads are calculated based on the strength design provision of ACI 318-14 Chapter 17 using a conversion factor of  $\alpha = 1/0.6 = 1.67$ . The conversion factor  $\alpha$  is based on the load combination assuming 100% wind load.
2. Tabulated values are for a single anchor with no influence of another anchor.
3. Interpolation between embedment depths is not permitted.
4. Tabulated values for this embedment depth are based on internal testing and they are not listed in ICC-ES ESR-3037.
5. The Designer of Record is responsible for the foundation design.

\* See page 3 for an explanation of the load table icons.


# Strong-Bolt® 2 Design Information – Concrete

Carbon Steel Strong-Bolt® 2 Allowable Tension Loads in Normal-Weight Concrete ( $f'_c = 2,500$  psi)  
 – Seismic Load




Anchor Dia. (in.)	Nominal Embed. Depth (in.)	Min. Concrete Thickness $h_{min}$ (in.)	Critical Edge Distance $c_{ac}$ (in.)	Minimum Edge Distance $c_{min}$ (in.)	Allowable Tension Load (lb.)							
					Edge Distances = $c_{ac}$ on all sides				Edge Distances = $c_{min}$ on one side and $c_{ac}$ on three sides			
					SDC A-B		SDC C-F		SDC A-B		SDC C-F	
					Uncracked	Cracked	Uncracked	Cracked	Uncracked	Cracked	Uncracked	Cracked
1/4	1 3/4	3 1/4	2 1/2	1 3/4	1,005	—	—	—	750	—	—	—
3/8	1 7/8	3 1/4	6 1/2	6	1,005	590	755	445	930	590	695	445
	2 7/8	4 1/2	6	6	1,520	1,265	1,140	950	1,520	1,265	1,140	950
1/2	2 1/4 <sup>7</sup>	4	6	6	1,265	—	—	—	1,265	—	—	—
	2 3/4	4	6	6	1,645	1,305	1,230	980	1,645	1,305	1,230	980
	3 7/8	6	7 1/2	4	2,390	2,270	1,790	1,700	1,920	2,010	1,440	1,510
5/8	2 3/4 <sup>7</sup>	5 1/2	7 1/2	6 1/2	1,905	—	—	—	1,650	—	—	—
	3 3/8	5 1/2	7 1/2	6 1/2	2,490	1,765	1,865	1,325	2,160	1,765	1,615	1,325
	5 1/8	7 7/8	9	6 1/2	4,105	3,135	3,080	2,350	3,795	3,135	2,845	2,350
3/4	3 3/8 <sup>7</sup>	6	6	4 1/4	2,610	—	—	—	1,850	—	—	—
	4 1/8	6	6	4 1/4	3,240	2,400	2,430	1,800	2,500	2,100	1,875	1,575
	5 3/4	8 3/4	8	4 1/4	4,035	3,870	3,030	2,900	3,900	2,945	2,925	2,210
1	5 1/4	9	18	8	3,220	2,965	2,415	2,225	1,960	2,965	1,470	2,225
	9 3/4	13 1/2	13 1/2	8	3,730	4,305	2,795	3,230	3,730	4,305	2,795	3,230

1. Allowable tension loads are calculated based on the strength design provision of ACI 318-14 Chapter 17 using a conversion factor of  $\alpha = 1/0.7 = 1.43$ . The conversion factor  $\alpha$  is based on the load combination assuming 100% seismic load.
2. Tabulated values are for a single anchor with no influence of another anchor.
3. Interpolation between embedment depths is not permitted.
4. The allowable tension load listed for SDC (Seismic Design Category) A-B may also be used in SDC C-F when the tension component of the strength-level seismic design load on the anchor does not exceed 20% of the total factored tension load on the anchor associated with the same load combination.
5. When designing anchorages in SDC C-F, the designer shall consider the ductility requirements of ACI 318-14 Section 17.2.3.
6. Tension design strengths in SDC C-F have been adjusted by 0.75 factor in accordance with ACI 318-14 Section 17.2.3.4.4.
7. Tabulated values for this embedment depth are based on internal testing and they are not listed in ICC-ES ESR-3037.
8. The Designer of Record is responsible for the foundation design.

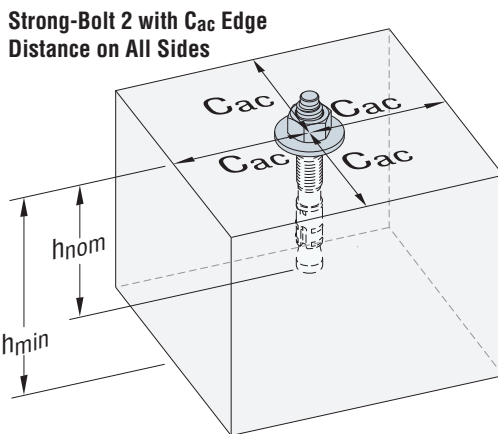

Flat Slab

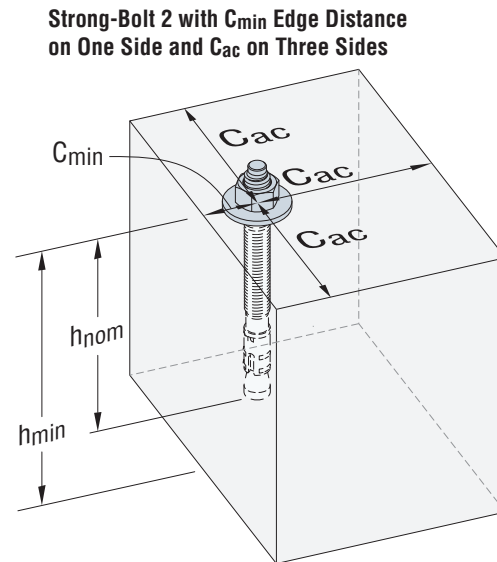

Flat Slab

\* See page 3 for an explanation of the load table icons.


# Strong-Bolt® 2 Design Information – Concrete

Carbon Steel Strong-Bolt® 2 Shear Design Strengths in Normal-Weight Concrete ( $f'_c = 2,500$  psi)




Anchor Dia. (in.)	Nominal Embed. Depth (in.)	Min. Concrete Thickness $h_{min}$ (in.)	Critical Edge Distance $c_{ac}$ (in.)	Minimum Edge Distance $c_{min}$ (in.)	Shear Design Strength (lb.)											
					Edge Distances = $c_{ac}$ on all sides				Edge Distances = $c_{min}$ on one side and $c_{ac}$ on three sides							
					SDC A-B		SDC C-F		SDC A-B				SDC C-F			
					Uncracked	Cracked	Uncracked	Cracked	Uncracked		Cracked		Uncracked		Cracked	
									$\perp$ to edge	$\parallel$ to edge	$\perp$ to edge	$\parallel$ to edge	$\perp$ to edge	$\parallel$ to edge	$\perp$ to edge	$\parallel$ to edge
1/4	1 3/4	3 3/4	2 1/2	1 3/4	560	—	—	—	535	440	—	—	—	—	—	—
3/8	1 7/8	3 3/4	6 1/2	6	1,170	1,095	1,170	1,095	1,170	1,170	1,095	1,095	1,170	1,170	1,095	1,095
	2 7/8	4 1/2	6	6	1,170	1,170	1,170	1,170	1,170	1,170	1,170	1,170	1,170	1,170	1,170	1,170
1/2	2 1/4 <sup>8</sup>	4	6	6	1,935	—	—	—	1,935	1,935	—	—	—	—	—	—
	2 3/4	4	6	6	2,140	1,530	2,140	1,530	2,140	2,140	1,530	1,530	2,140	2,140	1,530	1,530
	3 7/8	6	7 1/2	4	3,555	2,540	3,555	2,540	2,845	2,345	2,030	1,675	2,845	2,345	2,030	1,675
5/8	2 3/4 <sup>8</sup>	5 1/2	7 1/2	6 1/2	1,935	—	—	—	1,935	1,935	—	—	—	—	—	—
	3 3/8	5 1/2	7 1/2	6 1/2	3,490	2,495	3,490	2,495	3,490	3,130	2,495	2,235	3,490	3,130	2,495	2,235
	5 1/8	7 7/8	9	6 1/2	5,535	3,955	5,535	3,955	5,535	4,370	3,955	3,120	5,535	4,370	3,955	3,120
3/4	3 3/8 <sup>8</sup>	6	6	4 1/4	3,055	—	—	—	3,055	2,380	—	—	—	—	—	—
	4 1/8	6	6	4 1/4	3,210	2,295	3,210	2,295	3,210	2,500	2,295	1,785	3,210	2,500	2,295	1,785
	5 3/4	8 3/4	8	4 1/4	5,450	3,890	5,450	3,890	3,805	3,620	2,715	2,585	3,805	3,620	2,715	2,585
1	5 1/4	9	18	8	9,010	9,010	9,010	9,010	7,130	7,130	6,175	5,575	7,130	7,130	6,175	5,575
	9 3/4	13 1/2	13 1/2	8	9,010	8,505	9,010	8,505	9,010	8,325	7,130	5,945	9,010	8,325	7,130	5,945

1. Shear design strengths (SD level) are based on the strength design provisions of ACI 318-14 Chapter 17.
2. Tabulated values are for a single anchor with no influence of another anchor.
3. Interpolation between embedment depths is not permitted.
4. Strength reduction factor,  $\phi_s$ , is based on using a load combination from ACI 318-14 Section 5.3.
5. The shear design strength listed for SDC (Seismic Design Category) A-B may also be used in SDC C-F when the shear component of the strength-level seismic design load on the anchor does not exceed 20% of the total factored shear load on the anchor associated with the same load combination.
6. When designing anchorages in SDC C-F, the designer shall consider the ductility requirements of ACI 318-14 Section 17.2.3.
7. Shear design strengths in SDC C-F have been adjusted by 0.75 factor in accordance with ACI 318-14 Section 17.2.3.4.4.
8. Tabulated values for this embedment depth are based on internal testing and they are not listed in ICC-ES ESR-3037.
9. The Designer of Record is responsible for the foundation design.

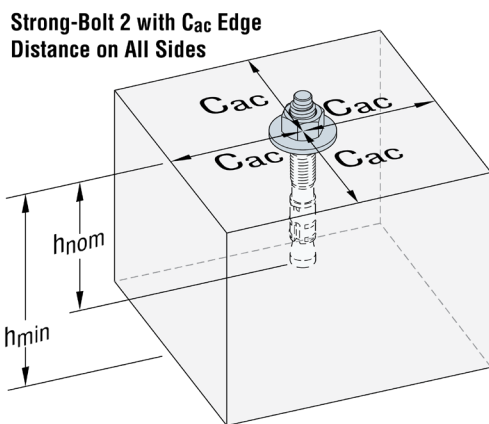

Flat Slab

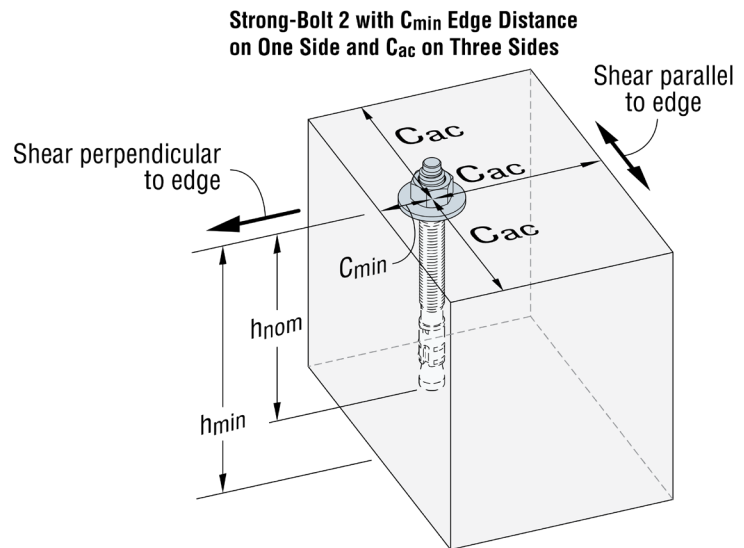

Flat Slab

\* See page 3 for an explanation of the load table icons.

# Strong-Bolt® 2 Design Information – Concrete

Carbon Steel Strong-Bolt® 2 Allowable Shear Loads in Normal-Weight Concrete ( $f'_c = 2,500$  psi)  
– Static Load



Anchor Dia. (in.)	Nominal Embed. Depth (in.)	Min. Concrete Thickness $h_{min}$ (in.)	Critical Edge Distance $c_{ac}$ (in.)	Minimum Edge Distance $c_{min}$ (in.)	Allowable Shear Load (lb.)					
					Edge Distances = $c_{ac}$ on all sides		Edge Distances = $c_{min}$ on one side and $c_{ac}$ on three sides			
					Uncracked	Cracked	Uncracked		Cracked	
							⊥ to edge	to edge	⊥ to edge	to edge
1/4	1 3/4	3 1/4	2 1/2	1 3/4	400	—	380	315	—	—
3/8	1 7/8	3 1/4	6 1/2	6	835	780	835	835	780	780
	2 7/8	4 1/2	6	6	835	835	835	835	835	835
1/2	2 1/4 <sup>4</sup>	4	6	6	1,380	—	1,380	1,380	—	—
	2 3/4	4	6	6	1,530	1,095	1,530	1,530	1,095	1,095
	3 7/8	6	7 1/2	4	2,540	1,815	2,030	1,675	1,450	1,195
5/8	2 3/4 <sup>4</sup>	5 1/2	7 1/2	6 1/2	1,380	—	1,380	1,380	—	—
	3 3/8	5 1/2	7 1/2	6 1/2	2,495	1,780	2,495	2,235	1,780	1,595
	5 1/8	7 7/8	9	6 1/2	3,955	2,825	3,955	3,120	2,825	2,230
3/4	3 3/8 <sup>4</sup>	6	6	4 1/4	2,180	—	2,180	1,700	—	—
	4 1/8	6	6	4 1/4	2,295	1,640	2,295	1,785	1,640	1,275
	5 3/4	8 3/4	8	4 1/4	3,895	2,780	2,720	2,585	1,940	1,845
1	5 1/4	9	18	8	6,435	6,435	5,095	5,095	4,410	3,980
	9 3/4	13 1/2	13 1/2	8	6,435	6,075	6,435	5,945	5,095	4,245

1. Allowable shear loads are calculated based on the strength design provision of ACI 318-14 Chapter 17 using a conversion factor of  $\alpha = 1.4$ . The conversion factor  $\alpha$  is based on the load combination 1.2D + 1.6L assuming 50% dead load and 50% live load:  $1.2(0.5) + 1.6(0.5) = 1.4$ .
2. Tabulated values are for a single anchor with no influence of another anchor.
3. Interpolation between embedment depths is not permitted.
4. Tabulated values for this embedment depth are based on internal testing and they are not listed in ICC-ES ESR-3037.
5. The Designer of Record is responsible for the foundation design.

Carbon Steel Strong-Bolt® 2 Allowable Shear Loads in Normal-Weight Concrete ( $f'_c = 2,500$  psi)  
– Wind Load



Anchor Dia. (in.)	Nominal Embed. Depth (in.)	Min. Concrete Thickness $h_{min}$ (in.)	Critical Edge Distance $c_{ac}$ (in.)	Minimum Edge Distance $c_{min}$ (in.)	Allowable Shear Load (lb.)					
					Edge Distances = $c_{ac}$ on all sides		Edge Distances = $c_{min}$ on one side and $c_{ac}$ on three sides			
					Uncracked	Cracked	Uncracked		Cracked	
							⊥ to edge	to edge	⊥ to edge	to edge
1/4	1 3/4	3 1/4	2 1/2	1 3/4	335	—	320	265	—	—
3/8	1 7/8	3 1/4	6 1/2	6	700	655	700	700	655	655
	2 7/8	4 1/2	6	6	700	700	700	700	700	700
1/2	2 1/4 <sup>4</sup>	4	6	6	1,160	—	1,160	1,160	—	—
	2 3/4	4	6	6	1,285	920	1,285	1,285	920	920
	3 7/8	6	7 1/2	4	2,135	1,525	1,705	1,405	1,220	1,005
5/8	2 3/4 <sup>4</sup>	5 1/2	7 1/2	6 1/2	1,160	—	1,160	1,160	—	—
	3 3/8	5 1/2	7 1/2	6 1/2	2,095	1,495	2,095	1,880	1,495	1,340
	5 1/8	7 7/8	9	6 1/2	3,320	2,375	3,320	2,620	2,375	1,870
3/4	3 3/8 <sup>4</sup>	6	6	4 1/4	1,835	—	1,835	1,430	—	—
	4 1/8	6	6	4 1/4	1,925	1,375	1,925	1,500	1,375	1,070
	5 3/4	8 3/4	8	4 1/4	3,270	2,335	2,285	2,170	1,630	1,550
1	5 1/4	9	18	8	5,405	5,405	4,280	4,280	3,705	3,345
	9 3/4	13 1/2	13 1/2	8	5,405	5,105	5,405	4,995	4,280	3,565

1. Allowable shear loads are calculated based on the strength design provision of ACI 318-14 Chapter 17 using a conversion factor of  $\alpha = 1.67$ . The conversion factor  $\alpha$  is based on the load combination assuming 100% wind load.
2. Tabulated values are for a single anchor with no influence of another anchor.
3. Interpolation between embedment depths is not permitted.
4. Tabulated values for this embedment depth are based on internal testing and they are not listed in ICC-ES ESR-3037.
5. The Designer of Record is responsible for the foundation design.

\* See page 3 for an explanation of the load table icons.




# Strong-Bolt® 2 Design Information – Concrete

Carbon Steel Strong-Bolt® 2 Allowable Shear Loads in Normal-Weight Concrete ( $f'_c = 2,500$  psi)  
 – Seismic Load



Anchor Dia. (in.)	Nominal Embed. Depth (in.)	Min. Concrete Thickness $h_{min}$ (in.)	Critical Edge Distance $c_{ac}$ (in.)	Minimum Edge Distance $c_{min}$ (in.)	Allowable Shear Load (lb.)											
					Edge Distances = $c_{ac}$ on all sides				Edge Distances = $c_{min}$ on one side and $c_{ac}$ on three sides							
					SDC A-B		SDC C-F		SDC A-B				SDC C-F			
					Uncracked	Cracked	Uncracked	Cracked	Uncracked		Cracked		Uncracked		Cracked	
				⊥ to edge	∥ to edge	⊥ to edge	∥ to edge	⊥ to edge	∥ to edge	⊥ to edge	∥ to edge	⊥ to edge	∥ to edge			
1/4	1 3/4	3 1/4	2 1/2	1 3/4	390	—	—	—	375	310	—	—	—	—	—	—
3/8	1 7/8	3 1/4	6 1/2	6	820	765	820	765	820	820	765	765	820	820	765	765
	2 7/8	4 1/2	6	6	820	820	820	820	820	820	820	820	820	820	820	820
1/2	2 1/4 <sup>7</sup>	4	6	6	1,355	—	—	—	1,355	1,355	—	—	—	—	—	—
	2 3/4	4	6	6	1,500	1,070	1,500	1,070	1,500	1,500	1,070	1,070	1,500	1,500	1,070	1,070
	3 7/8	6	7 1/2	4	2,490	1,780	2,490	1,780	1,990	1,640	1,420	1,175	1,990	1,640	1,420	1,175
5/8	2 9/4 <sup>7</sup>	5 1/2	7 1/2	6 1/2	1,355	—	—	—	1,355	1,355	—	—	—	—	—	—
	3 3/8	5 1/2	7 1/2	6 1/2	2,445	1,745	2,445	1,745	2,445	2,190	1,745	1,565	2,445	2,190	1,745	1,565
	5 1/8	7 7/8	9	6 1/2	3,875	2,770	3,875	2,770	3,875	3,060	2,770	2,185	3,875	3,060	2,770	2,185
3/4	3 3/8 <sup>7</sup>	6	6	4 1/4	2,140	—	—	—	2,140	1,665	—	—	—	—	—	—
	4 1/8	6	6	4 1/4	2,245	1,605	2,245	1,605	2,245	1,750	1,605	1,250	2,245	1,750	1,605	1,250
	5 3/4	8 3/4	8	4 1/4	3,815	2,725	3,815	2,725	2,665	2,535	1,900	1,810	2,665	2,535	1,900	1,810
1	5 1/4	9	18	8	6,305	6,305	6,305	6,305	4,990	4,990	4,325	3,900	4,990	4,990	4,325	3,900
	9 3/4	13 1/2	13 1/2	8	6,305	5,955	6,305	5,955	6,305	5,830	4,990	4,160	6,305	5,830	4,990	4,160

1. Allowable tension loads are calculated based on the strength design provision of ACI 318-14 Chapter 17 using a conversion factor of  $\alpha = 1.43$ . The conversion factor  $\alpha$  is based on the load combination assuming 100% seismic load.
2. Tabulated values are for a single anchor with no influence of another anchor.
3. Interpolation between embedment depths is not permitted.
4. The allowable tension load listed for SDC (Seismic Design Category) A-B may also be used in SDC C-F when the tension component of the strength-level seismic design load on the anchor does not exceed 20% of the total factored tension load on the anchor associated with the same load combination.
5. When designing anchorages in SDC C-F, the designer shall consider the ductility requirements of ACI 318-14 Section 17.2.3.
6. Tension design strengths in SDC C-F have been adjusted by 0.75 factor in accordance with ACI 318-14 Section 17.2.3.4.4.
7. Tabulated values for this embedment depth are based on internal testing and they are not listed in ICC-ES ESR-3037.
8. The Designer of Record is responsible for the foundation design.

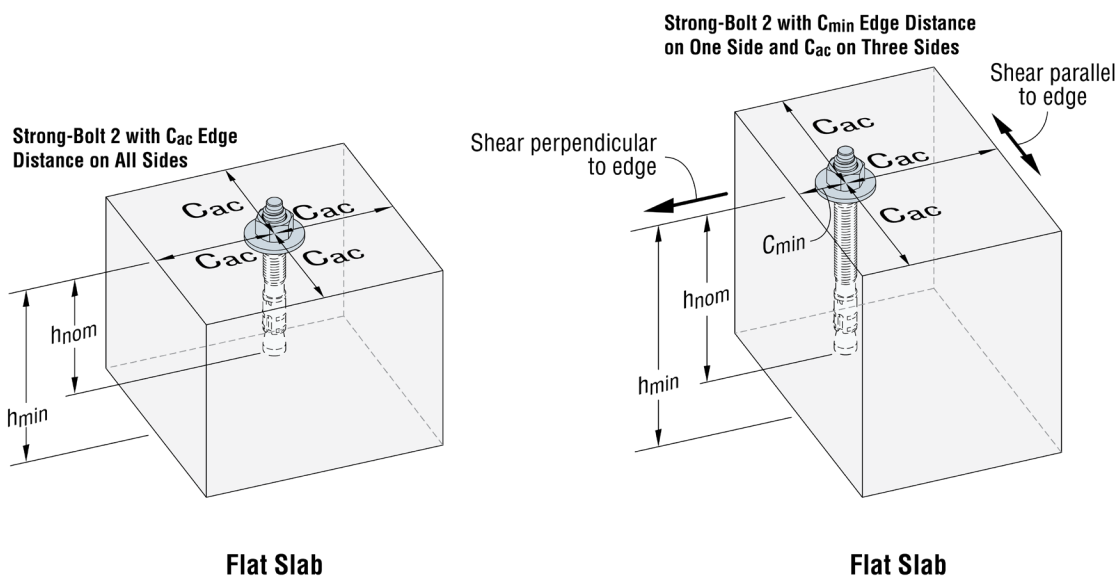

\* See page 3 for an explanation of the load table icons.

# Strong-Bolt® 2 Design Information – Concrete

Carbon Steel Strong-Bolt® 2 Tension Design Strength in Soffit of Normal-Weight or Sand-Lightweight Concrete-Filled Profile Steel Deck Assemblies ( $f'_c = 3,000$  psi)



Anchor Dia. (in.)	Nominal Embed. Depth (in.)	Minimum End Distance $c_{min}$ (in.)	Tension Design Strength (lb.)							
			Lower Flute				Upper Flute			
			SDC A-B		SDC C-F		SDC A-B		SDC C-F	
			Uncracked	Cracked	Uncracked	Cracked	Uncracked	Cracked	Uncracked	Cracked
3/8	2	3 1/4	1,145	675	860	505	1,480	870	1,110	655
	3 3/8	6	2,050	1,700	1,535	1,275	—	—	—	—
1/2	2 3/4	4 1/2	1,675	1,325	1,260	995	3,115	2,460	2,340	1,845
	4 1/2	8	2,495	1,775	1,870	1,330	—	—	—	—
5/8	3 3/8	5 1/2	2,395	1,700	1,795	1,275	—	—	—	—
	5 5/8	10	4,265	3,245	3,200	2,435	—	—	—	—
3/4	4 1/8	6 3/4	2,470	1,830	1,855	1,370	—	—	—	—

1. Tension design strengths (SD level) are based on the strength design provisions of ACI 318-14 Chapter 17.
2. Tabulated values are for a single anchor with no influence of another anchor.
3. Interpolation between embedment depths is not permitted.
4. Strength reduction factor,  $\phi$ , is based on using a load combination from ACI 318-14 Section 5.3.
5. The tension design strength listed for SDC (Seismic Design Category) A-B may also be used in SDC C-F when the tension component of the strength-level seismic design load on the anchor does not exceed 20% of the total factored tension load on the anchor associated with the same load combination.
6. When designing anchorages in SDC C-F, the designer shall consider the ductility requirements of ACI 318-14 Section 17.2.3.
7. Tension design strengths in SDC C-F have been adjusted by 0.75 factor in accordance with ACI 318-14 Section 17.2.3.4.4.
8. Installation must comply with Figure 1.

Carbon Steel Strong-Bolt® 2 Allowable Tension Loads in Soffit of Normal-Weight or Sand-Lightweight Concrete-Filled Profile Steel Deck Assemblies ( $f'_c = 3,000$  psi) — Static Load



Anchor Dia. (in.)	Nominal Embed. Depth (in.)	Minimum End Distance $c_{min}$ (in.)	Allowable Tension Load (lb.)			
			Lower Flute		Upper Flute	
			Uncracked	Cracked	Uncracked	Cracked
3/8	2	3 1/4	820	480	1,055	620
	3 3/8	6	1,465	1,215	—	—
1/2	2 3/4	4 1/2	1,195	945	2,225	1,755
	4 1/2	8	1,780	1,270	—	—
5/8	3 3/8	5 1/2	1,710	1,215	—	—
	5 5/8	10	3,045	2,320	—	—
3/4	4 1/8	6 3/4	1,765	1,305	—	—

1. Allowable tension loads are calculated based on the strength design provision of ACI 318-14 Chapter 17 using a conversion factor of  $\alpha = 1.4$ . The conversion factor  $\alpha$  is based on the load combination  $1.2D + 1.6L$  assuming 50% dead load and 50% live load:  $1.2(0.5) + 1.6(0.5) = 1.4$ .
2. Tabulated values are for a single anchor with no influence of another anchor.
3. Interpolation between embedment depths is not permitted.
4. Installation must comply with Figure 1.

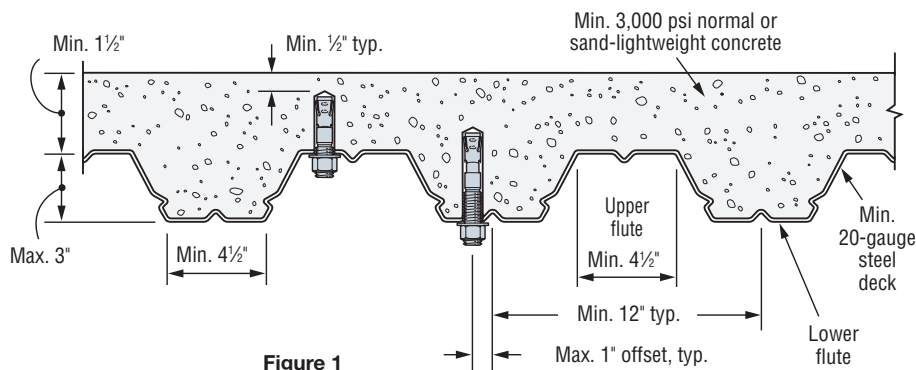


Figure 1

\* See page 3 for an explanation of the load table icons.

# Strong-Bolt® 2 Design Information – Concrete

Carbon Steel Strong-Bolt® 2 Allowable Tension Loads in Soffit of Normal-Weight or Sand-Lightweight Concrete-Filled Profile Steel Deck Assemblies ( $f'_c = 3,000$  psi) – Wind Load



Anchor Dia. (in.)	Nominal Embed. Depth (in.)	Minimum End Distance $c_{min}$ (in.)	Allowable Tension Load (lb.)			
			Lower Flute		Upper Flute	
			Uncracked	Cracked	Uncracked	Cracked
3/8	2	3 1/4	685	405	890	520
	3 3/8	6	1,230	1,020	—	—
1/2	2 3/4	4 1/2	1,005	795	1,870	1,475
	4 1/2	8	1,495	1,065	—	—
5/8	3 3/8	5 1/2	1,435	1,020	—	—
	5 5/8	10	2,560	1,945	—	—
3/4	4 1/8	6 3/4	1,480	1,100	—	—

1. Allowable tension loads are calculated based on the strength design provision of ACI 318-14 Chapter 17 using a conversion factor of  $\alpha = 1/0.6 = 1.67$ . The conversion factor  $\alpha$  is based on the load combination assuming 100% wind load.
2. Tabulated values are for a single anchor with no influence of another anchor.
3. Interpolation between embedment depths is not permitted.
4. Installation must comply with Figure 1.

Carbon Steel Strong-Bolt® 2 Allowable Tension Loads in Soffit of Normal-Weight or Sand-Lightweight Concrete-Filled Profile Steel Deck Assemblies ( $f'_c = 3,000$  psi) – Seismic Load



Anchor Dia. (in.)	Nominal Embed. Depth (in.)	Minimum End Distance $c_{min}$ (in.)	Allowable Tension Load (lb.)							
			Lower Flute				Upper Flute			
			SDC A-B		SDC C-F		SDC A-B		SDC C-F	
			Uncracked	Cracked	Uncracked	Cracked	Uncracked	Cracked	Uncracked	Cracked
3/8	2	3 1/4	800	475	600	355	1,035	610	775	460
	3 3/8	6	1,435	1,190	1,075	895	—	—	—	—
1/2	2 3/4	4 1/2	1,175	930	880	695	2,180	1,720	1,640	1,290
	4 1/2	8	1,745	1,245	1,310	930	—	—	—	—
5/8	3 3/8	5 1/2	1,675	1,190	1,255	895	—	—	—	—
	5 5/8	10	2,985	2,270	2,240	1,705	—	—	—	—
3/4	4 1/8	6 3/4	1,730	1,280	1,300	960	—	—	—	—

1. Allowable tension loads are calculated based on the strength design provision of ACI 318-14 Chapter 17 using a conversion factor of  $\alpha = 1/0.7 = 1.43$ . The conversion factor  $\alpha$  is based on the load combination assuming 100% seismic load.
2. Tabulated values are for a single anchor with no influence of another anchor.
3. Interpolation between embedment depths is not permitted.
4. The allowable tension load listed for SDC (Seismic Design Category) A-B may also be used in SDC C-F when the tension component of the strength-level seismic design load on the anchor does not exceed 20% of the total factored tension load on the anchor associated with the same load combination.
5. When designing anchorages in SDC C-F, the designer shall consider the ductility requirements of ACI 318-14 Section 17.2.3.
6. Tension design strengths in SDC C-F have been adjusted by 0.75 factor in accordance with ACI 318-14 Section 17.2.3.4.4.
7. Installation must comply with Figure 1.

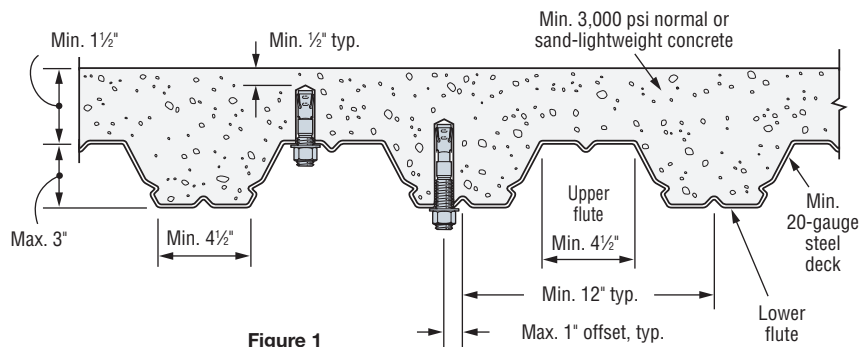


Figure 1

\* See page 3 for an explanation of the load table icons.


# Strong-Bolt® 2 Design Information – Concrete

Stainless Steel Strong-Bolt® 2 Tension Design Strength in Normal-Weight Concrete  
( $f'_c = 2,500$  psi)




Anchor Dia. (in.)	Nominal Embed. Depth (in.)	Min. Concrete Thickness $h_{min}$ (in.)	Critical Edge Distance $c_{ac}$ (in.)	Minimum Edge Distance $c_{min}$ (in.)	Tension Design Strength (lb.)							
					Edge Distances = $c_{ac}$ on all sides				Edge Distances = $c_{min}$ on one side and $c_{ac}$ on three sides			
					SDC A-B		SDC C-F		SDC A-B		SDC C-F	
					Uncracked	Cracked	Uncracked	Cracked	Uncracked	Cracked	Uncracked	Cracked
1/4	1 3/4	3 3/4	2 1/2	1 3/4	1,250	—	—	—	1,070	—	—	—
3/8	1 7/8	3 3/4	6 1/2	6	1,435	1,015	1,075	760	1,325	1,015	990	760
	2 7/8	4 1/2	8 1/2	6	3,085	2,045	2,090	1,380	2,175	2,045	1,630	1,380
1/2	2 1/4 <sup>8</sup>	4 1/2	6 1/2	6 1/2	1,415	—	—	—	1,415	—	—	—
	2 3/4	4 1/2	6 1/2	6 1/2	2,100	1,665	1,575	1,250	2,100	1,665	1,575	1,250
	3 7/8	6	7	5	2,920	2,800	2,190	2,100	2,920	2,800	2,190	2,100
5/8	2 3/4 <sup>8</sup>	5 1/2	7 1/2	4	1,545	—	—	—	1,290	—	—	—
	3 3/8	5 1/2	7 1/2	4	3,555	2,520	2,665	1,890	1,910	2,640	1,430	1,845
	5 1/8	7 7/8	9	4	4,950	4,255	3,710	3,190	3,905	3,685	2,925	2,765
3/4	3 3/8 <sup>8</sup>	6 3/4	8	6	3,315	—	—	—	2,485	—	—	—
	4 1/8	6 3/4	8	6	4,835	3,425	3,625	2,570	3,625	3,425	2,720	2,570
	5 3/4	8 3/4	8	6	6,255	5,350	4,690	4,010	6,255	5,225	4,690	3,920

1. Tension design strengths (SD level) are based on the strength design provisions of ACI 318-14 Chapter 17.
2. Tabulated values are for a single anchor with no influence of another anchor.
3. Interpolation between embedment depths is not permitted.
4. Strength reduction factor,  $\phi$ , is based on using a load combination from ACI 318-14 Section 5.3.
5. The tension design strength listed for SDC (Seismic Design Category) A-B may also be used in SDC C-F when the tension component of the strength-level seismic design load on the anchor does not exceed 20% of the total factored tension load on the anchor associated with the same load combination.
6. When designing anchorages in SDC C-F, the designer shall consider the ductility requirements of ACI 318-14 Section 17.2.3.
7. Tension design strengths in SDC C-F have been adjusted by 0.75 factor in accordance with ACI 318-14 Section 17.2.3.4.4.
8. Tabulated values for this embedment depth are based on internal testing and they are not listed in ICC-ES ESR-3037.
9. The Designer of Record is responsible for the foundation design.

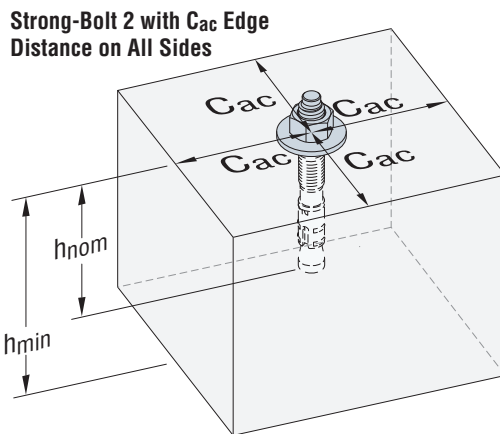

Flat Slab

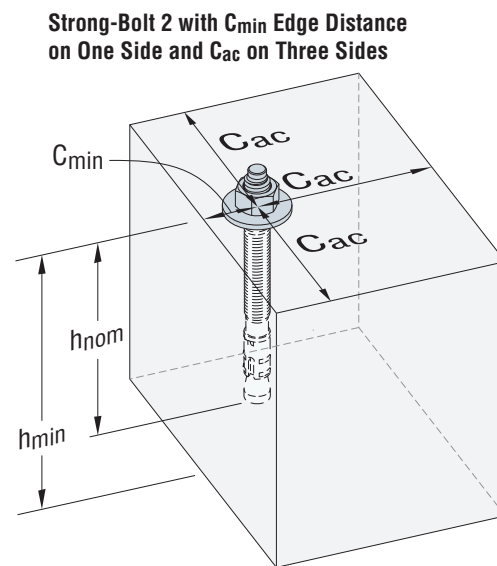

Flat Slab

\* See page 3 for an explanation of the load table icons.



# Strong-Bolt® 2 Design Information – Concrete

## Stainless Steel Strong-Bolt® 2 Allowable Tension Loads in Normal-Weight Concrete ( $f'_c = 2,500$ psi) – Static Load



Anchor Dia. (in.)	Nominal Embed. Depth (in.)	Min. Concrete Thickness $h_{min}$ (in.)	Critical Edge Distance $c_{ac}$ (in.)	Minimum Edge Distance $c_{min}$ (in.)	Allowable Tension Load (lb.)			
					Edge Distances = $c_{ac}$ on all sides		Edge Distances = $c_{min}$ on one side and $c_{ac}$ on three sides	
					Uncracked	Cracked	Uncracked	Cracked
1/4	1 3/4	3 1/4	2 1/2	1 3/4	895	—	765	—
3/8	1 7/8	3 1/4	6 1/2	6	1,025	725	945	725
	2 7/8	4 1/2	8 1/2	6	2,205	1,460	1,555	1,460
1/2	2 1/4 <sup>4</sup>	4 1/2	6 1/2	6 1/2	1,010	—	1,010	—
	2 3/4	4 1/2	6 1/2	6 1/2	1,500	1,190	1,500	1,190
	3 7/8	6	7	5	2,085	2,000	2,085	2,000
5/8	2 3/4 <sup>4</sup>	5 1/2	7 1/2	4	1,105	—	920	—
	3 3/8	5 1/2	7 1/2	4	2,540	1,800	1,365	1,755
	5 1/8	7 7/8	9	4	3,535	3,040	2,790	2,630
3/4	3 3/8 <sup>4</sup>	6 3/4	8	6	2,370	—	1,775	—
	4 1/8	6 3/4	8	6	3,455	2,445	2,590	2,445
	5 3/4	8 3/4	8	6	4,470	3,820	4,470	3,730

1. Allowable tension loads are calculated based on the strength design provision of ACI 318-14 Chapter 17 using a conversion factor of  $\alpha = 1.4$ . The conversion factor  $\alpha$  is based on the load combination 1.2D + 1.6L assuming 50% dead load and 50% live load:  $1.2(0.5) + 1.6(0.5) = 1.4$ .
2. Tabulated values are for a single anchor with no influence of another anchor.
3. Interpolation between embedment depths is not permitted.
4. Tabulated values for this embedment depth are based on internal testing and they are not listed in ICC-ES ESR-3037.
5. The Designer of Record is responsible for the foundation design.

## Stainless Steel Strong-Bolt® 2 Allowable Tension Loads in Normal-Weight Concrete ( $f'_c = 2,500$ psi) – Wind Load



Anchor Dia. (in.)	Nominal Embed. Depth (in.)	Min. Concrete Thickness $h_{min}$ (in.)	Critical Edge Distance $c_{ac}$ (in.)	Minimum Edge Distance $c_{min}$ (in.)	Allowable Tension Load (lb.)			
					Edge Distances = $c_{ac}$ on all sides		Edge Distances = $c_{min}$ on one side and $c_{ac}$ on three sides	
					Uncracked	Cracked	Uncracked	Cracked
1/4	1 3/4	3 1/4	2 1/2	1 3/4	750	—	640	—
3/8	1 7/8	3 1/4	6 1/2	6	860	610	795	610
	2 7/8	4 1/2	8 1/2	6	1,850	1,225	1,305	1,225
1/2	2 1/4 <sup>4</sup>	4 1/2	6 1/2	6 1/2	850	—	850	—
	2 3/4	4 1/2	6 1/2	6 1/2	1,260	1,000	1,260	1,000
	3 7/8	6	7	5	1,750	1,680	1,750	1,680
5/8	2 3/4 <sup>4</sup>	5 1/2	7 1/2	4	925	—	775	—
	3 3/8	5 1/2	7 1/2	4	2,135	1,510	1,145	1,475
	5 1/8	7 7/8	9	4	2,970	2,555	2,345	2,210
3/4	3 3/8 <sup>4</sup>	6 3/4	8	6	1,990	—	1,490	—
	4 1/8	6 3/4	8	6	2,900	2,055	2,175	2,055
	5 3/4	8 3/4	8	6	3,755	3,210	3,755	3,135

1. Allowable tension loads are calculated based on the strength design provision of ACI 318-14 Chapter 17 using a conversion factor of  $\alpha = 1/0.6 = 1.67$ . The conversion factor  $\alpha$  is based on the load combination assuming 100% wind load.
2. Tabulated values are for a single anchor with no influence of another anchor.
3. Interpolation between embedment depths is not permitted.
4. Tabulated values for this embedment depth are based on internal testing and they are not listed in ICC-ES ESR-3037.
5. The Designer of Record is responsible for the foundation design.

\* See page 3 for an explanation of the load table icons.


# Strong-Bolt® 2 Design Information – Concrete

Stainless Steel Strong-Bolt® 2 Allowable Tension Loads in Normal-Weight Concrete ( $f'_c = 2,500$  psi) – Seismic Load




Anchor Dia. (in.)	Nominal Embed. Depth (in.)	Min. Concrete Thickness $h_{min}$ (in.)	Critical Edge Distance $c_{ac}$ (in.)	Minimum Edge Distance $c_{min}$ (in.)	Allowable Tension Load (lb.)							
					Edge Distances = $c_{ac}$ on all sides				Edge Distances = $c_{min}$ on one side and $c_{ac}$ on three sides			
					SDC A-B		SDC C-F		SDC A-B		SDC C-F	
					Uncracked	Cracked	Uncracked	Cracked	Uncracked	Cracked	Uncracked	Cracked
1/4	1 3/4	3 1/4	2 1/2	1 3/4	875	—	—	—	750	—	—	—
3/8	1 7/8	3 1/4	6 1/2	6	1,005	710	755	530	930	710	695	530
	2 7/8	4 1/2	8 1/2	6	2,160	1,430	1,465	965	1,525	1,430	1,140	965
1/2	2 1/4 <sup>7</sup>	4 1/2	6 1/2	6 1/2	990	—	—	—	990	—	—	—
	2 3/4	4 1/2	6 1/2	6 1/2	1,470	1,165	1,105	875	1,470	1,165	1,105	875
	3 7/8	6	7	5	2,045	1,960	1,535	1,470	2,045	1,960	1,535	1,470
5/8	2 3/4 <sup>7</sup>	5 1/2	7 1/2	4	1,080	—	—	—	905	—	—	—
	3 3/8	5 1/2	7 1/2	4	2,490	1,765	1,865	1,325	1,335	1,720	1,000	1,290
	5 1/8	7 7/8	9	4	3,465	2,980	2,595	2,235	2,735	2,580	2,050	1,935
3/4	3 3/8 <sup>7</sup>	6 3/4	8	6	2,320	—	—	—	1,740	—	—	—
	4 1/8	6 3/4	8	6	3,385	2,400	2,540	1,800	2,540	2,400	1,905	1,800
	5 3/4	8 3/4	8	6	4,380	3,745	3,285	2,805	4,380	3,660	3,285	2,745

1. Allowable tension loads are calculated based on the strength design provision of ACI 318-14 Chapter 17 using a conversion factor of  $\alpha = 1/0.7 = 1.43$ . The conversion factor  $\alpha$  is based on the load combination assuming 100% seismic load.
2. Tabulated values are for a single anchor with no influence of another anchor.
3. Interpolation between embedment depths is not permitted.
4. The allowable tension load listed for SDC (Seismic Design Category) A-B may also be used in SDC C-F when the tension component of the strength-level seismic design load on the anchor does not exceed 20% of the total factored tension load on the anchor associated with the same load combination.
5. When designing anchorages in SDC C-F, the designer shall consider the ductility requirements of ACI 318-14 Section 17.2.3.
6. Tension design strengths in SDC C-F have been adjusted by 0.75 factor in accordance with ACI 318-14 Section 17.2.3.4.4.
7. Tabulated values for this embedment depth are based on internal testing and they are not listed in ICC-ES ESR-3037.
8. The Designer of Record is responsible for the foundation design.

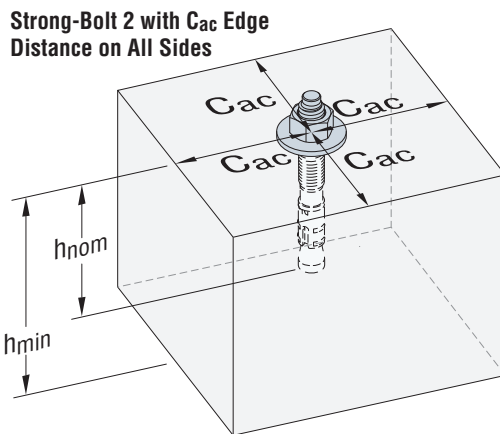

Flat Slab

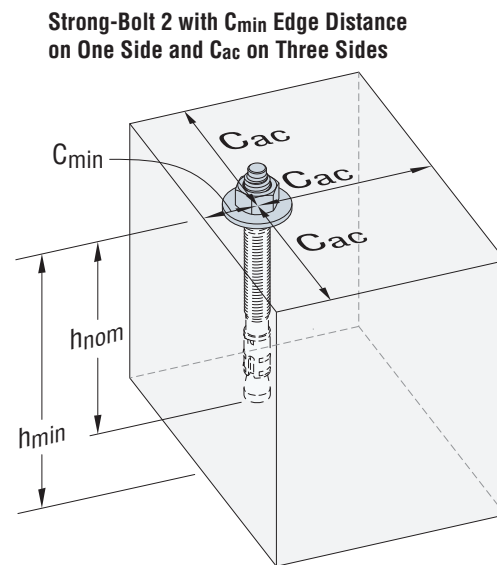

Flat Slab


\* See page 3 for an explanation of the load table icons.

# Strong-Bolt® 2 Design Information – Concrete


Stainless Steel Strong-Bolt® 2 Shear Design Strengths in Normal-Weight Concrete ( $f'_c = 2,500$  psi) \*

Anchor Dia. (in.)	Nominal Embed. Depth (in.)	Min. Concrete Thickness $h_{min}$ (in.)	Critical Edge Distance $c_{ac}$ (in.)	Minimum Edge Distance $c_{min}$ (in.)	Shear Design Strength (lb.)											
					Edge Distances = $c_{ac}$ on all sides				Edge Distances = $c_{min}$ on one side and $c_{ac}$ on three sides							
					SDC A-B		SDC C-F		SDC A-B		SDC C-F					
					Uncracked	Cracked	Uncracked	Cracked	Uncracked	Cracked	Uncracked	Cracked				
									⊥ to edge	∥ to edge	⊥ to edge	∥ to edge	⊥ to edge	∥ to edge		
1/4	1 3/4	3 1/4	2 1/2	1 3/4	560	—	—	—	535	440	—	—	—	—	—	—
3/8	1 7/8	3 1/4	6 1/2	6	1,545	1,095	1,545	1,095	1,425	1,425	1,095	1,095	1,425	1,425	1,095	1,095
	2 7/8	4 1/2	8 1/2	6	2,005	2,005	2,005	2,005	2,005	2,005	2,005	1,675	2,005	2,005	2,005	1,675
1/2	2 1/4 <sup>8</sup>	4 1/2	6 1/2	6 1/2	1,945	—	—	—	1,945	1,945	—	—	—	—	—	—
	2 3/4	4 1/2	6 1/2	6 1/2	2,460	1,755	2,460	1,755	2,460	2,460	1,755	1,755	2,460	2,460	1,755	1,755
	3 7/8	6	7	5	3,315	2,370	3,315	2,370	3,315	2,600	2,370	1,855	3,315	2,600	2,370	1,855
5/8	2 3/4 <sup>8</sup>	5 1/2	7 1/2	4	2,600	—	—	—	1,390	1,390	—	—	—	—	—	—
	3 3/8	5 1/2	7 1/2	4	3,490	2,495	3,490	2,495	2,795	2,300	1,995	1,645	2,795	2,300	1,995	1,645
	5 1/8	7 7/8	9	4	5,535	3,955	5,535	3,955	3,220	3,330	2,300	2,380	3,220	3,330	2,300	2,380
3/4	3 3/8 <sup>8</sup>	6 3/4	8	6	4,320	—	—	—	4,320	3,495	—	—	—	—	—	—
	4 1/8	6 3/4	8	6	4,540	3,245	4,540	3,245	4,540	3,675	3,245	2,625	4,540	3,675	3,245	2,625
	5 1/4	8 3/4	8	6	5,450	3,890	5,450	3,890	5,450	4,430	3,890	3,165	5,450	4,430	3,890	3,165

1. Shear design strengths (SD level) are based on the strength design provisions of ACI 318-14 Chapter 17.
2. Tabulated values are for a single anchor with no influence of another anchor.
3. Interpolation between embedment depths is not permitted.
4. Strength reduction factor,  $\phi$ , is based on using a load combination from ACI 318-14 Section 5.3.
5. The shear design strength listed for SDC (Seismic Design Category) A-B may also be used in SDC C-F when the shear component of the strength-level seismic design load on the anchor does not exceed 20% of the total factored shear load on the anchor associated with the same load combination.
6. When designing anchorages in SDC C-F, the designer shall consider the ductility requirements of ACI 318-14 Section 17.2.3.
7. Shear design strengths in SDC C-F have been adjusted by 0.75 factor in accordance with ACI 318-14 Section 17.2.3.4.4.
8. Tabulated values for this embedment depth are based on internal testing and they are not listed in ICC-ES ESR-3037.
9. The Designer of Record is responsible for the foundation design.

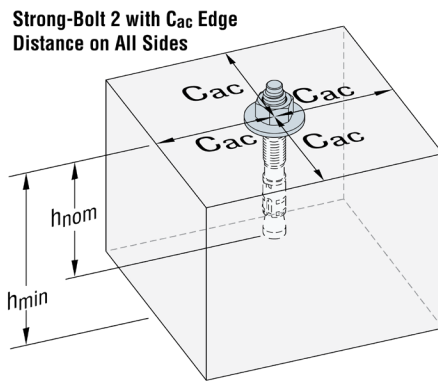

Flat Slab

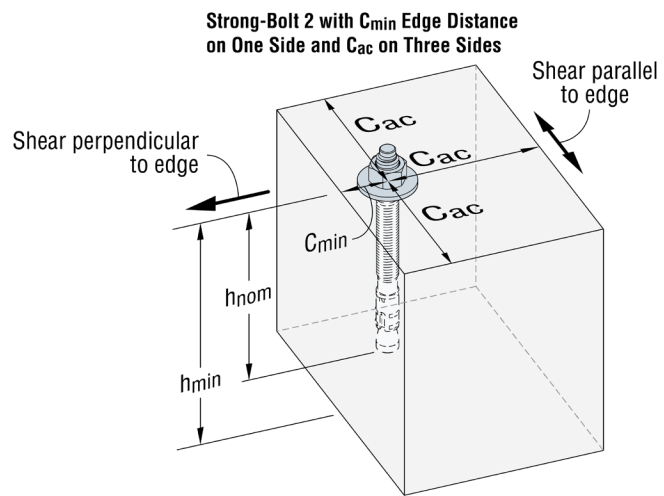

Flat Slab

\* See page 3 for an explanation of the load table icons.





# Strong-Bolt® 2 Design Information – Concrete

Stainless Steel Strong-Bolt® 2 Allowable Shear Loads in Normal-Weight Concrete ( $f'_c = 2,500$  psi) – Static Load



Anchor Dia. (in.)	Nominal Embed. Depth (in.)	Min. Concrete Thickness $h_{min}$ (in.)	Critical Edge Distance $c_{ac}$ (in.)	Minimum Edge Distance $c_{min}$ (in.)	Allowable Shear Load (lb.)					
					Edge Distances = $c_{ac}$ on all sides		Edge Distances = $c_{min}$ on one side and $c_{ac}$ on three sides			
					Uncracked	Cracked	Uncracked		Cracked	
							⊥ to edge	∥ to edge	⊥ to edge	∥ to edge
1/4	1 3/4	3 1/4	2 1/2	1 3/4	400	—	380	315	—	—
3/8	1 7/8	3 1/4	6 1/2	6	1,105	780	1,020	1,020	780	780
	2 7/8	4 1/2	8 1/2	6	1,430	1,430	1,430	1,430	1,430	1,195
1/2	2 1/4 <sup>4</sup>	4 1/2	6 1/2	6 1/2	1,390	—	1,390	1,390	—	—
	2 3/4	4 1/2	6 1/2	6 1/2	1,755	1,255	1,755	1,755	1,255	1,255
	3 7/8	6	7	5	2,370	1,695	2,370	1,855	1,695	1,325
5/8	2 3/4 <sup>4</sup>	5 1/2	7 1/2	4	1,855	—	995	995	—	—
	3 3/8	5 1/2	7 1/2	4	2,495	1,780	1,995	1,645	1,425	1,175
	5 1/8	7 7/8	9	4	3,955	2,825	2,300	2,380	1,645	1,700
3/4	3 3/8 <sup>4</sup>	6 3/4	8	6	3,085	—	3,085	2,495	—	—
	4 1/8	6 3/4	8	6	3,245	2,320	3,245	2,625	2,320	1,875
	5 3/4	8 3/4	8	6	3,895	2,780	3,895	3,165	2,780	2,260

1. Allowable shear loads are calculated based on the strength design provision of ACI 318-14 Chapter 17 using a conversion factor of  $\alpha = 1.4$ . The conversion factor  $\alpha$  is based on the load combination 1.2D + 1.6L assuming 50% dead load and 50% live load:  $1.2(0.5) + 1.6(0.5) = 1.4$ .
2. Tabulated values are for a single anchor with no influence of another anchor.
3. Interpolation between embedment depths is not permitted.
4. Tabulated values for this embedment depth are based on internal testing and they are not listed in ICC-ES ESR-3037.
5. The Designer of Record is responsible for the foundation design.

Stainless Steel Strong-Bolt® 2 Allowable Shear Loads in Normal-Weight Concrete ( $f'_c = 2,500$  psi) – Wind Load



Anchor Dia. (in.)	Nominal Embed. Depth (in.)	Min. Concrete Thickness $h_{min}$ (in.)	Critical Edge Distance $c_{ac}$ (in.)	Minimum Edge Distance $c_{min}$ (in.)	Allowable Shear Load (lb.)					
					Edge Distances = $c_{ac}$ on all sides		Edge Distances = $c_{min}$ on one side and $c_{ac}$ on three sides			
					Uncracked	Cracked	Uncracked		Cracked	
							⊥ to edge	∥ to edge	⊥ to edge	∥ to edge
1/4	1 3/4	3 1/4	2 1/2	1 3/4	335	—	320	265	—	—
3/8	1 7/8	3 1/4	6 1/2	6	925	655	855	855	655	655
	2 7/8	4 1/2	8 1/2	6	1,205	1,205	1,205	1,205	1,205	1,005
1/2	2 1/4 <sup>4</sup>	4 1/2	6 1/2	6 1/2	1,165	—	1,165	1,165	—	—
	2 3/4	4 1/2	6 1/2	6 1/2	1,475	1,055	1,475	1,475	1,055	1,055
	3 7/8	6	7	5	1,990	1,420	1,990	1,560	1,420	1,115
5/8	2 3/4 <sup>4</sup>	5 1/2	7 1/2	4	1,560	—	835	835	—	—
	3 3/8	5 1/2	7 1/2	4	2,095	1,495	1,675	1,380	1,195	985
	5 1/8	7 7/8	9	4	3,320	2,375	1,930	2,000	1,380	1,430
3/4	3 3/8 <sup>4</sup>	6 3/4	8	6	2,590	—	2,590	2,095	—	—
	4 1/8	6 3/4	8	6	2,725	1,945	2,725	2,205	1,945	1,575
	5 3/4	8 3/4	8	6	3,270	2,335	3,270	2,660	2,335	1,900

1. Allowable shear loads are calculated based on the strength design provision of ACI 318-14 Chapter 17 using a conversion factor of  $\alpha = 1.67$ . The conversion factor  $\alpha$  is based on the load combination assuming 100% wind load.
2. Tabulated values are for a single anchor with no influence of another anchor.
3. Interpolation between embedment depths is not permitted.
4. Tabulated values for this embedment depth are based on internal testing and they are not listed in ICC-ES ESR-3037.
5. The Designer of Record is responsible for the foundation design.

\* See page 3 for an explanation of the load table icons.




# Strong-Bolt® 2 Design Information – Concrete

Stainless Steel Strong-Bolt® 2 Allowable Shear Loads in Normal-Weight Concrete ( $f'_c = 2,500$  psi) – Seismic Load




Anchor Dia. (in.)	Nominal Embed. Depth (in.)	Min. Concrete Thickness $h_{min}$ (in.)	Critical Edge Distance $c_{ac}$ (in.)	Minimum Edge Distance $c_{min}$ (in.)	Allowable Shear Load (lb.)											
					Edge Distances = $c_{ac}$ on all sides				Edge Distances = $c_{min}$ on one side and $c_{ac}$ on three sides							
					SDC A-B		SDC C-F		SDC A-B				SDC C-F			
					Uncracked	Cracked	Uncracked	Cracked	Uncracked		Cracked		Uncracked		Cracked	
								$\perp$ to edge	$\parallel$ to edge	$\perp$ to edge	$\parallel$ to edge	$\perp$ to edge	$\parallel$ to edge	$\perp$ to edge	$\parallel$ to edge	
1/4	1 3/4	3 1/4	2 1/2	1 3/4	390	—	—	—	375	310	—	—	—	—	—	—
3/8	1 7/8	3 1/4	6 1/2	6	1,080	765	1,080	765	995	995	765	765	995	995	765	765
	2 7/8	4 1/2	8 1/2	6	1,405	1,405	1,405	1,405	1,405	1,405	1,405	1,175	1,405	1,405	1,405	1,175
1/2	2 1/4 <sup>7</sup>	4 1/2	6 1/2	6 1/2	1,360	—	—	—	1,360	1,360	—	—	—	—	—	—
	2 3/4	4 1/2	6 1/2	6 1/2	1,720	1,230	1,720	1,230	1,720	1,720	1,230	1,230	1,720	1,720	1,230	1,230
	3 7/8	6	7	5	2,320	1,660	2,320	1,660	2,320	1,820	1,660	1,300	2,320	1,820	1,660	1,300
5/8	2 3/4 <sup>7</sup>	5 1/2	7 1/2	4	1,820	—	—	—	975	975	—	—	—	—	—	—
	3 3/8	5 1/2	7 1/2	4	2,445	1,745	2,445	1,745	1,955	1,610	1,395	1,150	1,955	1,610	1,395	1,150
	5 1/8	7 7/8	9	4	3,875	2,770	3,875	2,770	2,255	2,330	1,610	1,665	2,255	2,330	1,610	1,665
3/4	3 3/8 <sup>7</sup>	6 3/4	8	6	3,025	—	—	—	3,025	2,445	—	—	—	—	—	—
	4 1/8	6 3/4	8	6	3,180	2,270	3,180	2,270	3,180	2,575	2,270	1,835	3,180	2,575	2,270	1,835
	5 3/4	8 3/4	8	6	3,815	2,725	3,815	2,725	3,815	3,100	2,725	2,215	3,815	3,100	2,725	2,215

1. Allowable shear loads are calculated based on the strength design provision of ACI 318-14 Chapter 17 using a conversion factor of  $\alpha = 1/6.7 = 1.43$ . The conversion factor  $\alpha$  is based on the load combination assuming 100% seismic load.
2. Tabulated values are for a single anchor with no influence of another anchor.
3. Interpolation between embedment depths is not permitted.
4. The allowable shear load listed for SDC (Seismic Design Category) A-B may also be used in SDC C-F when the shear component of the strength-level seismic design load on the anchor does not exceed 20% of the total factored shear load on the anchor associated with the same load combination.
5. When designing anchorages in SDC C-F, the designer shall consider the ductility requirements of ACI 318-14 Section 17.2.3.
6. Shear design strengths in SDC C-F have been adjusted by 0.75 factor in accordance with ACI 318-14 Section 17.2.3.4.4.
7. Tabulated values for this embedment depth are based on internal testing and they are not listed in ICC-ES ESR-3037.
8. The Designer of Record is responsible for the foundation design.

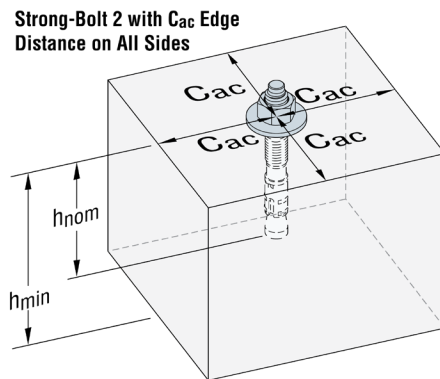

Flat Slab

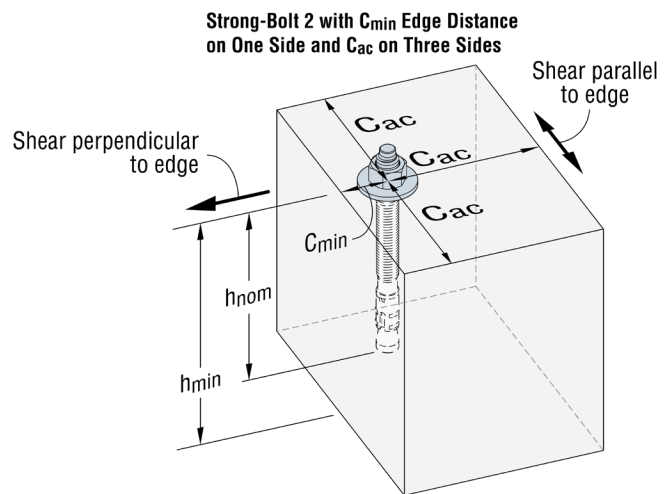

Flat Slab

\* See page 3 for an explanation of the load table icons.



# Strong-Bolt® 2 Design Information – Concrete

Stainless Steel Strong-Bolt® 2 Tension Design Strength in Soffit of Normal-Weight or Sand-Lightweight Concrete-Filled Profile Steel Deck Assemblies ( $f'_c = 3,000$  psi)



Anchor Dia. (in.)	Nominal Embed. Depth (in.)	Minimum End Distance $c_{min}$ (in.)	Tension Design Strength (lb.)							
			Lower Flute				Upper Flute			
			SDC A-B		SDC C-F		SDC A-B		SDC C-F	
			Uncracked	Cracked	Uncracked	Cracked	Uncracked	Cracked	Uncracked	Cracked
3/8	2	3/4	1,025	800	770	600	1,295	1,010	970	755
	3 3/8	6	2,570	1,695	1,735	1,145	—	—	—	—
1/2	2 3/4	4 1/2	1,610	1,295	1,205	970	1,665	1,335	1,250	1,000
	4 1/2	8	1,730	1,660	1,295	1,245	—	—	—	—
5/8	3 3/8	5 1/2	1,605	1,135	1,205	855	—	—	—	—
	5 5/8	10	3,250	2,615	2,440	1,960	—	—	—	—
3/4	4 1/8	6 3/4	2,780	1,970	2,085	1,475	—	—	—	—

1. Tension design strengths (SD level) are based on the strength design provisions of ACI 318-14 Chapter 17.
2. Tabulated values are for a single anchor with no influence of another anchor.
3. Interpolation between embedment depths is not permitted.
4. Strength reduction factor,  $\phi$ , is based on using a load combination from ACI 318-14 Section 5.3.
5. The tension design strength listed for SDC (Seismic Design Category) A-B may also be used in SDC C-F when the tension component of the strength-level seismic design load on the anchor does not exceed 20% of the total factored tension load on the anchor associated with the same load combination.
6. When designing anchorages in SDC C-F, the designer shall consider the ductility requirements of ACI 318-14 Section 17.2.3.
7. Tension design strengths in SDC C-F have been adjusted by 0.75 factor in accordance with ACI 318-14 Section 17.2.3.4.4.
8. Installation must comply with Figure 1.

Stainless Steel Strong-Bolt® 2 Allowable Tension Loads in Soffit of Normal-Weight or Sand-Lightweight Concrete-Filled Profile Steel Deck Assemblies ( $f'_c = 3000$  psi) – Static Load



Anchor Dia. (in.)	Nominal Embed. Depth (in.)	Minimum End Distance $c_{min}$ (in.)	Allowable Tension Load (lb.)			
			Lower Flute		Upper Flute	
			Uncracked	Cracked	Uncracked	Cracked
3/8	2	3/4	730	570	925	720
	3 3/8	6	1,835	1,210	—	—
1/2	2 3/4	4 1/2	1,150	925	1,190	955
	4 1/2	8	1,235	1,185	—	—
5/8	3 3/8	5 1/2	1,145	810	—	—
	5 5/8	10	2,320	1,870	—	—
3/4	4 1/8	6 3/4	1,985	1,405	—	—

1. Allowable tension loads are calculated based on the strength design provision of ACI 318-14 Chapter 17 using a conversion factor of  $\alpha = 1.4$ . The conversion factor  $\alpha$  is based on the load combination 1.2D + 1.6L assuming 50% dead load and 50% live load:  $1.2(0.5) + 1.6(0.5) = 1.4$ .
2. Tabulated values are for a single anchor with no influence of another anchor.
3. Interpolation between embedment depths is not permitted.
4. Installation must comply with Figure 1.

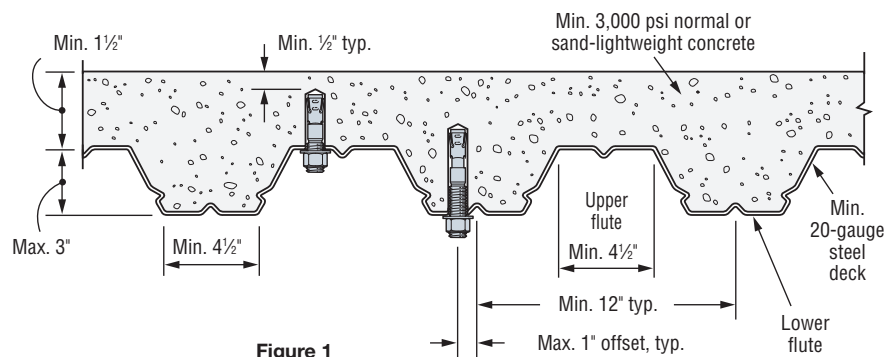


Figure 1

\* See page 3 for an explanation of the load table icons.

# Strong-Bolt® 2 Design Information – Concrete

Stainless Steel Strong-Bolt® 2 Allowable Tension Loads in Soffit of Normal-Weight or Sand-Lightweight Concrete-Filled Profile Steel Deck Assemblies ( $f'_c = 3,000$  psi)  
– Wind Load



Anchor Dia. (in.)	Nominal Embed. Depth (in.)	Minimum End Distance $c_{min}$ (in.)	Allowable Tension Load (lb.)			
			Lower Flute		Upper Flute	
			Uncracked	Cracked	Uncracked	Cracked
3/8	2	3 1/4	615	480	775	605
	3 3/8	6	1,540	1,015	—	—
1/2	2 3/4	4 1/2	965	775	1,000	800
	4 1/2	8	1,040	995	—	—
5/8	3 3/8	5 1/2	965	680	—	—
	5 5/8	10	1,950	1,570	—	—
3/4	4 1/8	6 3/4	1,670	1,180	—	—

1. Allowable tension loads are calculated based on the strength design provision of ACI 318-14 Chapter 17 using a conversion factor of  $\alpha = 1/1.67 = 1.67$ . The conversion factor  $\alpha$  is based on the load combination assuming 100% wind load.
2. Tabulated values are for a single anchor with no influence of another anchor.
3. Interpolation between embedment depths is not permitted.
4. Installation must comply with Figure 1 on page 18.

Stainless Steel Strong-Bolt® 2 Allowable Tension Loads in Soffit of Normal-Weight or Sand-Lightweight Concrete-Filled Profile Steel Deck Assemblies ( $f'_c = 3,000$  psi)  
– Seismic Load



Anchor Dia. (in.)	Nominal Embed. Depth (in.)	Minimum End Distance $c_{min}$ (in.)	Allowable Tension Load (lb.)							
			Lower Flute				Upper Flute			
			SDC A-B		SDC C-F		SDC A-B		SDC C-F	
			Uncracked	Cracked	Uncracked	Cracked	Uncracked	Cracked	Uncracked	Cracked
3/8	2	3 1/4	720	560	540	420	905	705	680	530
	3 3/8	6	1,800	1,185	1,215	800	—	—	—	—
1/2	2 3/4	4 1/2	1,125	905	845	680	1,165	935	875	700
	4 1/2	8	1,210	1,160	905	870	—	—	—	—
5/8	3 3/8	5 1/2	1,125	795	845	600	—	—	—	—
	5 5/8	10	2,275	1,830	1,710	1,370	—	—	—	—
3/4	4 1/8	6 3/4	1,945	1,380	1,460	1,035	—	—	—	—

1. Allowable tension loads are calculated based on the strength design provision of ACI 318-14 Chapter 17 using a conversion factor of  $\alpha = 1/1.43 = 1.43$ . The conversion factor  $\alpha$  is based on the load combination assuming 100% seismic load.
2. Tabulated values are for a single anchor with no influence of another anchor.
3. Interpolation between embedment depths is not permitted.
4. The allowable tension load listed for SDC (Seismic Design Category) A-B may also be used in SDC C-F when the tension component of the strength-level seismic design load on the anchor does not exceed 20% of the total factored tension load on the anchor associated with the same load combination.
5. When designing anchorages in SDC C-F, the designer shall consider the ductility requirements of ACI 318-14 Section 17.2.3.
6. Tension design strengths in SDC C-F have been adjusted by 0.75 factor in accordance with ACI 318-14 Section 17.2.3.4.4.
7. Installation must comply with Figure 1 on page 18.

\* See page 3 for an explanation of the load table icons.

This technical bulletin is effective until December 31, 2023, and reflects information available as of January 1, 2023. This information is updated periodically and should not be relied upon after December 31, 2023; contact Simpson Strong-Tie for current information and limited warranty or see [strongtie.com](http://strongtie.com).