

Strong-Drive® SCN and SCNR CONNECTOR Nails



Your best solution with Simpson Strong-Tie® connectors

Simpson Strong-Tie Strong-Drive SCN and SCNR Connector nails provide greater versatility and performance at your jobsite. These structural-connector nails are available in several sizes and coatings for installations in a variety of connector applications — and application environments. Whether you're installing in interior, exterior, dry-service or corrosive environments, there is a Strong-Drive SCN or SCNR product to suit your needs.

SCN and SCNR nails are approved for use with Simpson Strong-Tie connectors and may be used as connector nails as shown in the following tables. Compatible with a wide variety of popular power nailing tools, SCN and SCNR nails are available in 33° paper-collated strips, as well as noncollated for hand-driven installations.

Strong-Drive SCN SMOOTH-SHANK CONNECTOR Nail

Features:

- Full round head with embossed size identification
- Available in bright and hot-dip galvanized (HDG) to suit your installation needs
- Orange-dipped nail tips provide easy nail-to-connector hole alignment (on collated strips)

Strong-Drive SCNR RING-SHANK CONNECTOR Nail

Features:

- SCNR Ring-Shank Connector stainless steel nails are the best choice for achieving maximum load values in connectors
- Type 316 stainless steel for use with Simpson Strong-Tie stainless-steel connectors
- Full round head with size identifier for easy recognition on the jobsite

Tool Brands	Compatible Models
Bostitch®	MCN150 (up to 1½"), MCN250, F33PT
Grip-Rite®	GRP150 (up to 1½"), GRSB150 (up to 1½"), GR250, GRSB250-2½
Hitachi®	NR65AK
Paslode®	PF150S-PP (up to 1½"), F250S-PP
Senco®	HN150 (up to 1½"), HN250
For more models, contact us: (800) 999-5099	



33° SCN Smooth-Shank Connector Nail
(Bright, HDG)



33° SCNR Ring-Shank Connector Nail
(Type 316 Stainless Steel)

Strong-Drive® SCN and SCNR **CONNECTOR** Nails



SMOOTH-SHANK NAILS

33° SCN **SMOOTH-SHANK CONNECTOR** Nail

Hot-Dip Galvanized — Collated

For use with Simpson Strong-Tie® ZMAX® and hot-dip galvanized connectors in exterior applications, in corrosive environments and with some preservative-treated wood.

Shank Dia. x Length (in.)	Head Diameter (in.)	Carton Quantity	Model No.	Replacement For
0.131 x 1½	0.285	500	N8HDGPT500	8d x 1½"
		4,000	N8HDGPT4000	
0.131 x 2½	0.285	500	8DHDGPT500	8d common
		2,500	8DHDGPT2500	
0.148 x 1½	0.285	500	N10HDGPT500	10d x 1½"
		3,000	N10HDGPT3000	
0.148 x 2½	0.285	500	N10DHDGPT500	10d x 2½"
		2,500	N10DHDGPT2500	
0.162 x 2½	0.285	500	N16HDGPT500	16d x 2½"
		2,000	N16HDGPT2000	

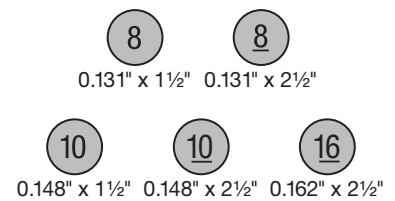



SCN Smooth-Shank Head Stamps

Hot-dip galvanized per ASTM A153, Class D


Bright — Collated

For use in dry-service and interior applications.

Shank Dia. x Length (in.)	Head Diameter (in.)	Carton Quantity	Model No.	Replacement For
0.131 x 1½	0.285	4,000	N8BRPT4000	8d x 1½"
0.148 x 1½	0.285	3,000	N10BRPT3000	10d x 1½"
0.148 x 2½		2,500	N10DBRPT2500	10d x 2½"



Strong-Drive 33° SCN Smooth-Shank Connector Nail (paper collated)

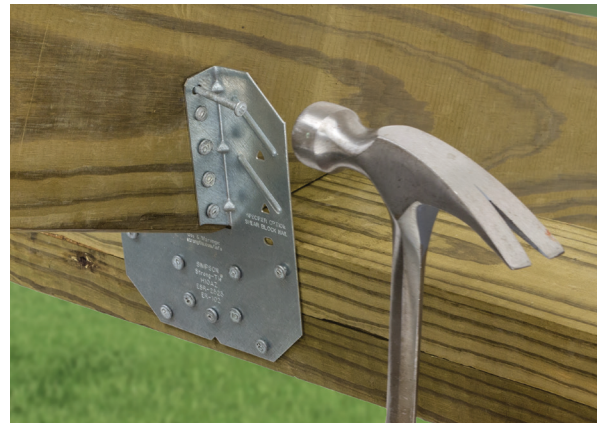

Strong-Drive SCN Smooth-Shank Connector Nail



Strong-Drive® SCN and SCNR CONNECTOR Nails

SCN SMOOTH-SHANK CONNECTOR Nail

Hot-Dip Galvanized — Hand Drive

Diameter x Length (in.)	Head Diameter (in.)	Approx. Count per lb.	1 lb. Model No.	Retail Pack Count	Retail Pack	Mini-Bulk Count	Mini-Bulk
0.131 x 1 ½	0.28	150	N8	150	N8DHDG-R	750	N8D5HDG-R
0.148 x 1 ½	0.31	120	N10	120	N10DHDG-R	600	N10D5HDG-R
0.148 x 3	0.31	50	—	50	10DHDG-R	250	10D5HDG-R
0.162 x 3 ½	0.34	40	—	40	16DHDG-R	200	16D5HDG-R

Hot-dip galvanized per ASTM A153, Class D

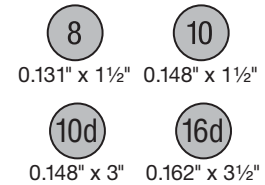

SCN Smooth-Shank Head Stamps


Annular RING-SHANK NAILS

33° SCNR RING-SHANK CONNECTOR Nail

Type 316 Stainless Steel, Annular Ring — Collated

For use with stainless-steel connectors and in severe-exposure applications for superior corrosion resistance.


Shank Dia. x Length (in.)	Head Diameter (in.)	Carton Quantity	Model No.	Replacement For
0.131 x 1 ½	0.285	1,500	T10A150MCN	8d x 1 ½"
0.131 x 2 ½		1,000	T10A250MCN	8d common
0.148 x 1 ½	0.285	1,500	T9A150MCN	10d x 1 ½"
0.148 x 2 ½		1,000	T9A250MCN	10d x 2 ½"

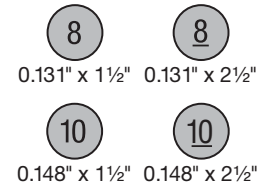

SCNR Ring-Shank Head Stamp All Sizes



Strong-Drive 33° SCNR Ring-Shank Connector Nail (paper collated)

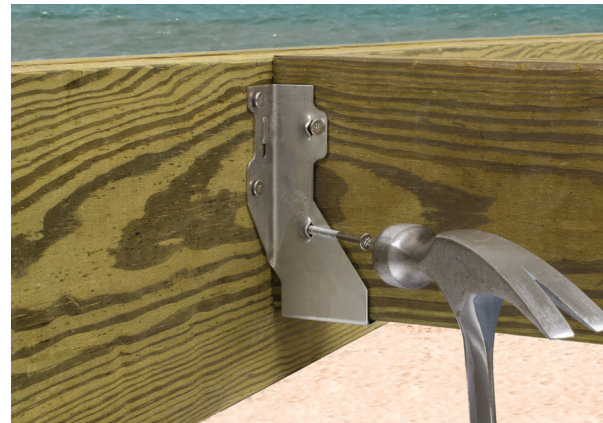


Strong-Drive SCNR Ring-Shank Connector Nail (hand driven)

Strong-Drive® SCN and SCNR **CONNECTOR** Nails

SCNR **RING-SHANK** CONNECTOR Nail




SCNR Ring-Shank Head Stamps



Type 316 Stainless Steel Annular Ring — Hand Drive

Diameter x Length (in.)	Head Diameter (in.)	Approx. Count per lb.	1 lb. Model No.	Retail Pack Count	Retail Pack	Mini-Bulk Count	Mini-Bulk	Bulk Count	Bulk Model No.
0.131 x 1½"	0.28	150	SSNA8	150	SSNA8D	750	SSNA8D5	3,750	SSNA8DB
0.131 x 2½"	0.28	90	SSA8D	90	SSA8DD	450	SSA8D5	2,250	SSA8DB
0.148 x 1½"	0.31	120	SSNA10	120	SSNA10D	600	SSNA10D5	3,000	SSNA10DB
0.148 x 3"	0.31	50	SSA10D	50	SSA10DD	250	SSA10D5	1,250	SSA10DB
0.162 x 3½"	0.34	40	SSA16D	40	SSA16DD	200	SSA16D5	1,000	SSA16DB

Hot-Dip Galvanized Annular Ring — Hand Drive



Diameter x Length (in.)	Head Diameter (in.)	Approx. Count per lb.	1 lb. Model No.	1 lb. Box Model No.	Approx. 5 lb. Count	5 lb. Box Model No.	Approx. 25 lb. Count	25 lb. Box Model No.
0.250 x 2½"	0.50	27			N54AHDG — Sold by the pound			

Hot-dip galvanized per ASTM A153, Class D

Bright Annular Ring — Hand Drive



Diameter x Length (in.)	Head Diameter (in.)	Approx. Count per lb.	1 lb. Model No.	1 lb. Box Model No.	Approx. 5 lb. Count	5 lb. Box Model No.	Approx. 25 lb. Count	25 lb. Box Model No.
0.250 x 2½"	0.50	27			N54A — Sold by the pound			

Bright nails are not for use in exterior or preservative-treated wood applications.