




FINISHING AID™

FINISHING & TROWELING AID

SINAK Finishing Aid™ reduces friction while troweling freshly placed concrete. It is compatible with all curing agents, compounds, and evaporation retarder and is designed to be used as a troweling aid on any concrete surface.

Finishing Aid™ is especially effective with low slump concrete and colored concrete. It excels in adverse weather conditions, and is a simple, ready-to-use product that does not require dilution or mixing on the job site.

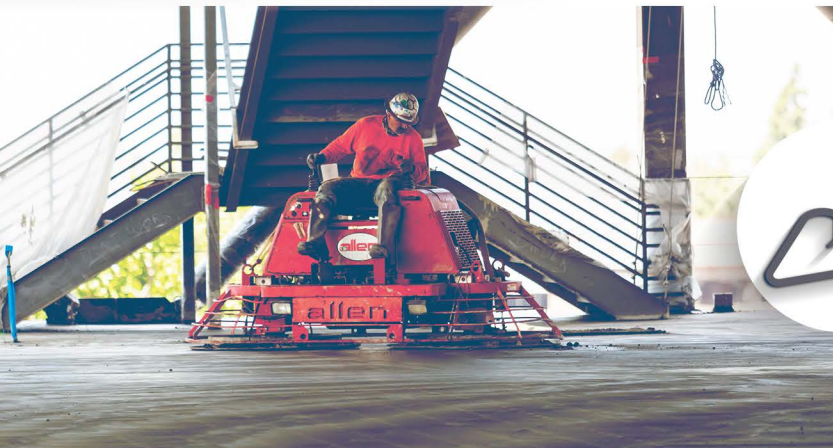

FEATURES & BENEFITS

- UNIVERSALLY COMPATIBLE
- INCREASES WORKABILITY
- REDUCES DUSTING
- MITIGATES PLASTIC SHRINKAGE CRACKS
- UNLIMITED SHELF LIFE

SINAK Finishing Aid™ prevents, dusting, crazing and surface cracking. It improves workability, reduces surfaces defects without impacting the color or appearance.

SINAK Finishing Aid™ does not overwater concrete that can lead to weak paste composition. The addition of SINAK Finishing Aid™ to the surface allows concrete finishing to stay on schedule. SINAK Corporation recognizes that each concrete placement is unique. Weather conditions, mix designs and geography all play a role in the ability to place and finish the concrete surface. SINAK Finishing Aid™ is recommended for use in conjunction with SINAK Moisture Vapor Control and SINAK Curing Agents.



WHERE TO USE FINISHING AID™

- UNIVERSALLY COMPATIBLE
- INCREASES WORKABILITY
- REDUCES DUSTING
- MITIGATES PLASTIC SHRINKAGE CRACKS
- UNLIMITED SHELF LIFE
- MEDICAL FACILITIES
- CONCRETE PAVEMENTS
- ROLLER COMPACTED CONCRETE (RCC)
- CAST-IN-PLACE
- STRUCTURAL CONCRETE
- COMMERCIAL
- SCHOOLS
- WAREHOUSE/DISTRIBUTION