




Terapro Waterproofing System


Pro Grid-Reinforced / Pro Natural Quartz

Optional Pro Accent Chip

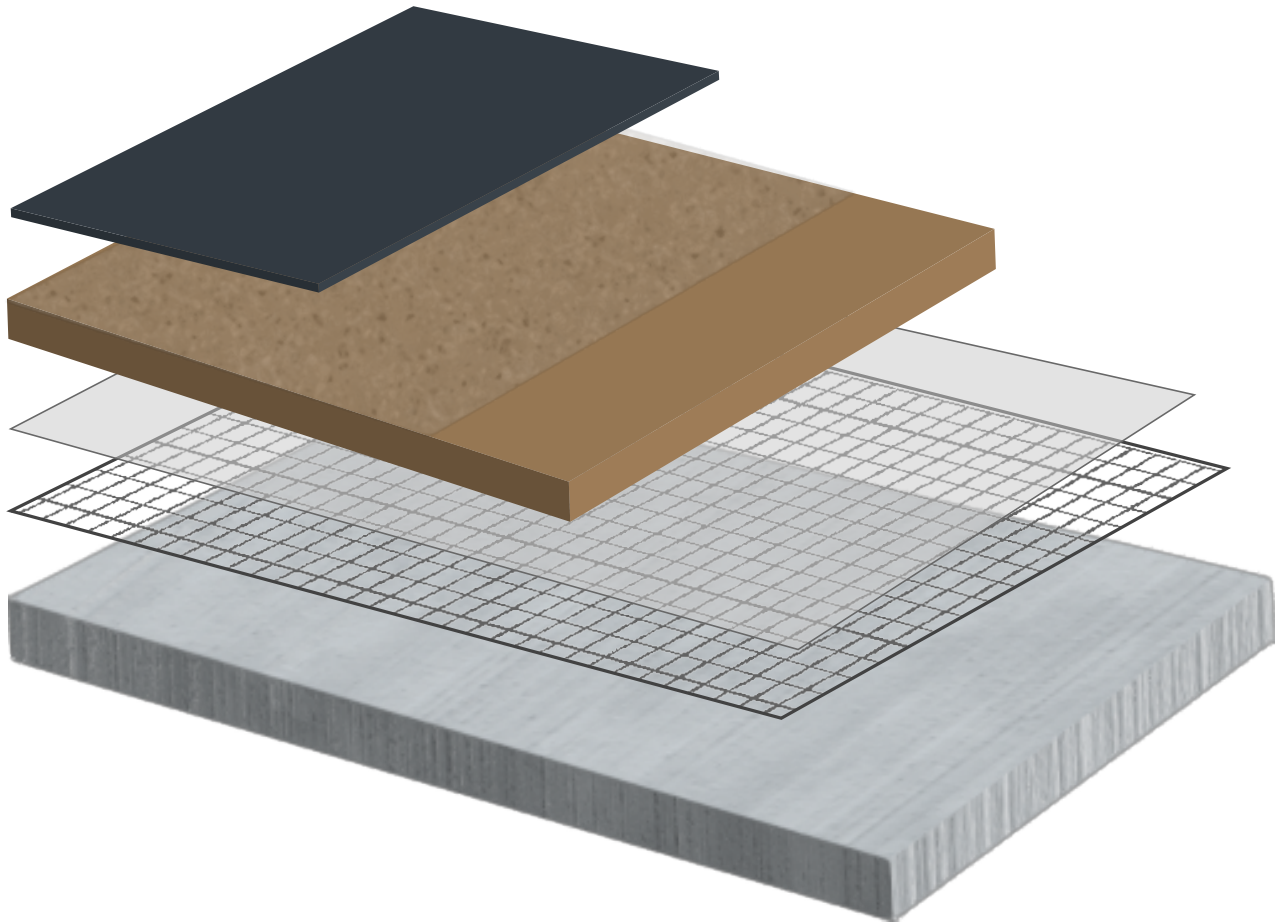

Material Estimating Guide

Terapro Waterproofing & Surfacing System Grid-Reinforced

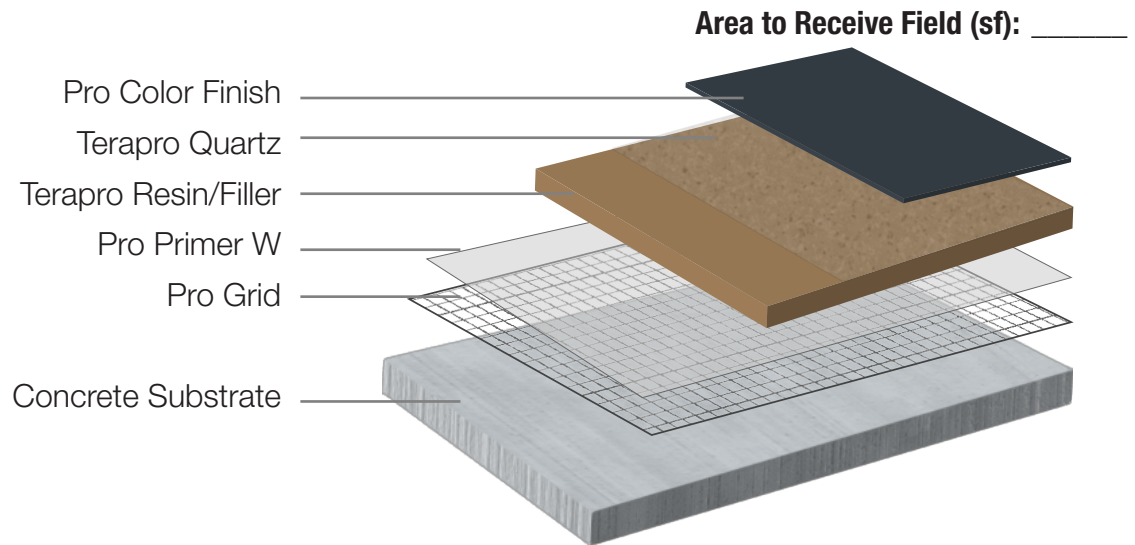

FIELD MEMBRANE

	area to be covered (sf)		sf coverage per unit		# of units needed		waste factor*		total # of units		Pro Catalyst Liquid (cups) (see catalyst chart)
Optional Reinforcement Pro Grid Reinforcement - loose-laid on substrate 47"x450' (1760 sf)		÷	1760	=		+		=	Rolls		n/a
Primer Layer with Pro Grid Reinforcement Pro Primer W (10-kg pail) Consumption (min): 0.074 kg/sf Coverage (min): 135 sf/pail		÷	135	=		+		=	Pails		Cups
Waterproofing/Wearing Layer - Kit Terapro VTS Resin (10-kg pail) Consumption (min): 0.14 kg/sf Coverage (min): 71 sf/pail		÷	71	=		+		=	Pails		Cups
Terapro VTS Quartz Filler (50 lbs pail) Coverage (min): 71 sf/pail		÷	71	=		+		=	Pails		
Surfacing Aggregate Pro Natural Quartz (50 lbs bag) Consumption (min): 1 lb/sf Coverage (min): 50 sf		÷	50	=		+		=	Bags		n/a
Finish Layer Pro Color Finish (10-kg pail) Consumption w/o Pro Accent Chips (min) 0.06 kg/sf Coverage w/o Pro Accent Chips: 166 sf		÷	166	=		+		=	Pails		Cups
or Consumption with Pro Accent Chips (min) 0.07 kg/sf Coverage with Pro Accent Chips: 144 sf		÷	144	=		+		=	Pails		Cups
Surfacing Chip (optional) Pro Accent Chips (5-kg box) Consumption (min): 0.01 kg/sf Coverage: 500 sf		÷	500	=		+		=	Boxes		n/a

CATALYST FOR FLASHING, FIELD & SURFACING/COLOR

	total # of cups above		cups per container		total # of units
Pro Catalyst Liquid		÷	10	=	_____
2.5 kg container (10 cups)					Containers

CATALYST FOR FLASHING & PRIMERS

	total # of cups above		cups per container		total # of units
Pro Catalyst Liquid		÷	10	=	_____
2.5 kg container (10 cups)					Containers

WASTE AND OVERAGE FACTORS

RESIN TYPE	4" COVER	9" COVER	18" COVER
Pro Primer/Pro Color	0.1 kg	0.55 kg	1.1 kg
Terapro Flashing and Base Resin	0.1 kg	0.75 kg	1.5 kg

Coverage quantities are based upon minimum weight and coverage requirements. The above estimates do not include provisions for crack/joint treatment, detailing, rough absorbent surfaces, or waste (including material required for saturation of disposable roller covers and fleece overlaps).

To ensure that an adequate quantity of material is purchased for a project, a waste factor should be included in all estimates. The contractor is best qualified to determine actual waste factors.

Pro Catalyst Liquid Mixing Charts

Pro Catalyst Liquid Mixing Chart Pro Primer W and Pro Primer T

Resin Quantity	Ambient Temperature 77°F to 95°F (25°C to 35°C)		Ambient Temperature 41°F to 77°F (5°C to 25°C)		Ambient Temperature 32°F to 41°F (0°C to 5°C)	
	tablespoons	cups	tablespoons	cups	tablespoons	cups
1 kg (1 liter)	2	n/a	4	n/a	6	n/a
10 kg (10 liters)	n/a	1	n/a	2	n/a	3

Substrate temperature range for application of Pro Primers is 32°F to 95°F (0°C to 35°C).

Pro Catalyst Liquid Mixing Chart Pro Color Finish

Resin Quantity	Ambient Temperature 59°F to 95°F (15°C to 35°C)		Ambient Temperature 41°F to 59°F (5°C to 15°C)		Ambient Temperature 32°F to 41°F (0°C to 5°C)	
	tablespoons	cups	tablespoons	cups	tablespoons	cups
1 kg (1 liter)	2	n/a	4	n/a	6	n/a
10 kg (10 liters)	n/a	1	n/a	2	n/a	3


Substrate temperature range for application of Pro Color Finish is 32°F to 95°F (0°C to 35°C).


Pro Catalyst Liquid Mixing Chart Summer Grade Terapro Base Resin and Terapro Flashing Resin				
Resin Quantity	Ambient Temperature 68°F to 104°F (20°C to 40°C)		Ambient Temperature 59°F to 68°F (15°C to 20°C)	
	tablespoons	cups	tablespoons	cups
1 kg (0.72 liter)	2	n/a	4	n/a
10 kg (7.2 liters)	n/a	1	n/a	2
Substrate temperature range for application of Summer Grade Parapro and Terapro resins is 59°F to 122°F (15°C to 50°C).				

Pro Catalyst Liquid Mixing Chart Winter Grade Terapro Base Resin and Terapro Flashing Resin						
Resin Quantity	Ambient Temperature 59°F to 68°F (15°C to 20°C)		Ambient Temperature 41°F to 59°F (5°C to 15°)		Ambient Temperature 23°F to 41°F (-5°C to 5°C)	
	tablespoons	cups	tablespoons	cups	tablespoons	cups
1 kg (0.72 liter)	2	n/a	4	n/a	6	n/a
10 kg (7.2 liters)	n/a	1	n/a	2	n/a	3
Substrate temperature range for application of Winter Grade Parapro and Terapro resins is 23°F to 77°F (-5°C to 25°C).						

Pro Catalyst Liquid Mixing Chart Terapro VTS Resin/Filler (full batch with 10 kg of VTS Resin and full bag of VTS Filler)		
Ambient Temperature 77°F to 95°F (25°C to 35°C)	Ambient Temperature 41°F to 77°F (5°C to 25°C)	Ambient Temperature 32°F to 41°F (0°C to 5°C)
1 cup	2 cups	3 cups
Substrate temperature range for application of Terapro VTS Resin is 32°F to 122°F (0°C to 50°C).		

Pro Catalyst Liquid Mixing Chart Pro Paste Resin						
Resin Quantity	Ambient Temperature 77°F to 95°F (25°C to 35°C)		Ambient Temperature 41°F to 77°F (5°C to 25°C)		Ambient Temperature 32°F to 41°F (0°C to 5°C)	
	tablespoons	cups	tablespoons	cups	tablespoons	cups
1 kg (0.72 liter)	2	n/a	4	n/a	6	n/a
Substrate temperature range for application of Pro Paste Resin is 32°F to 122°F (0°C to 50°C).						

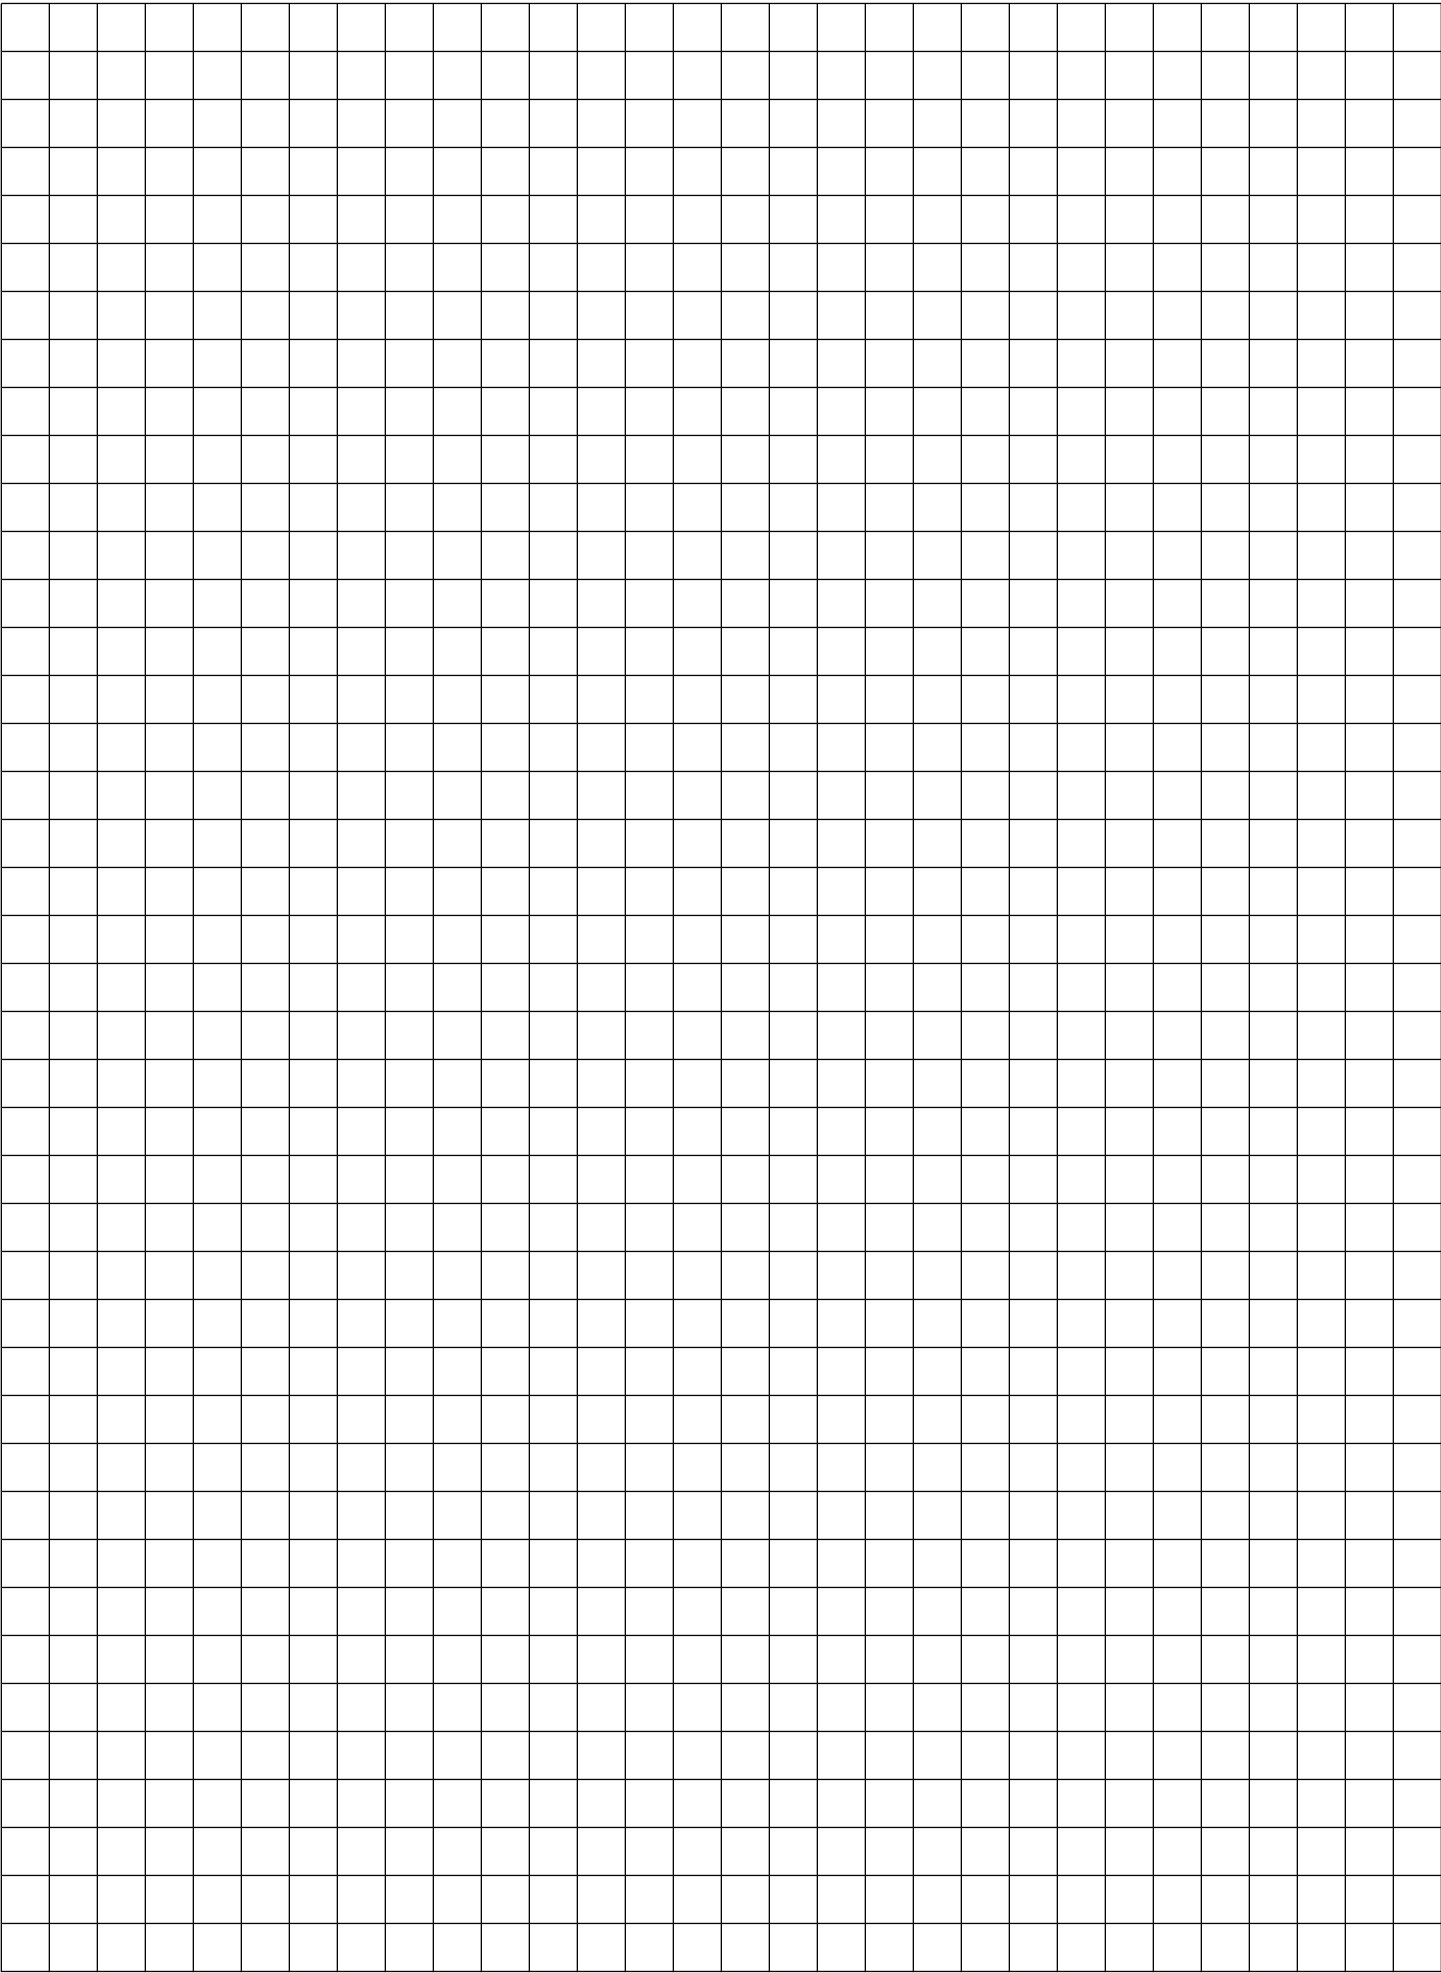

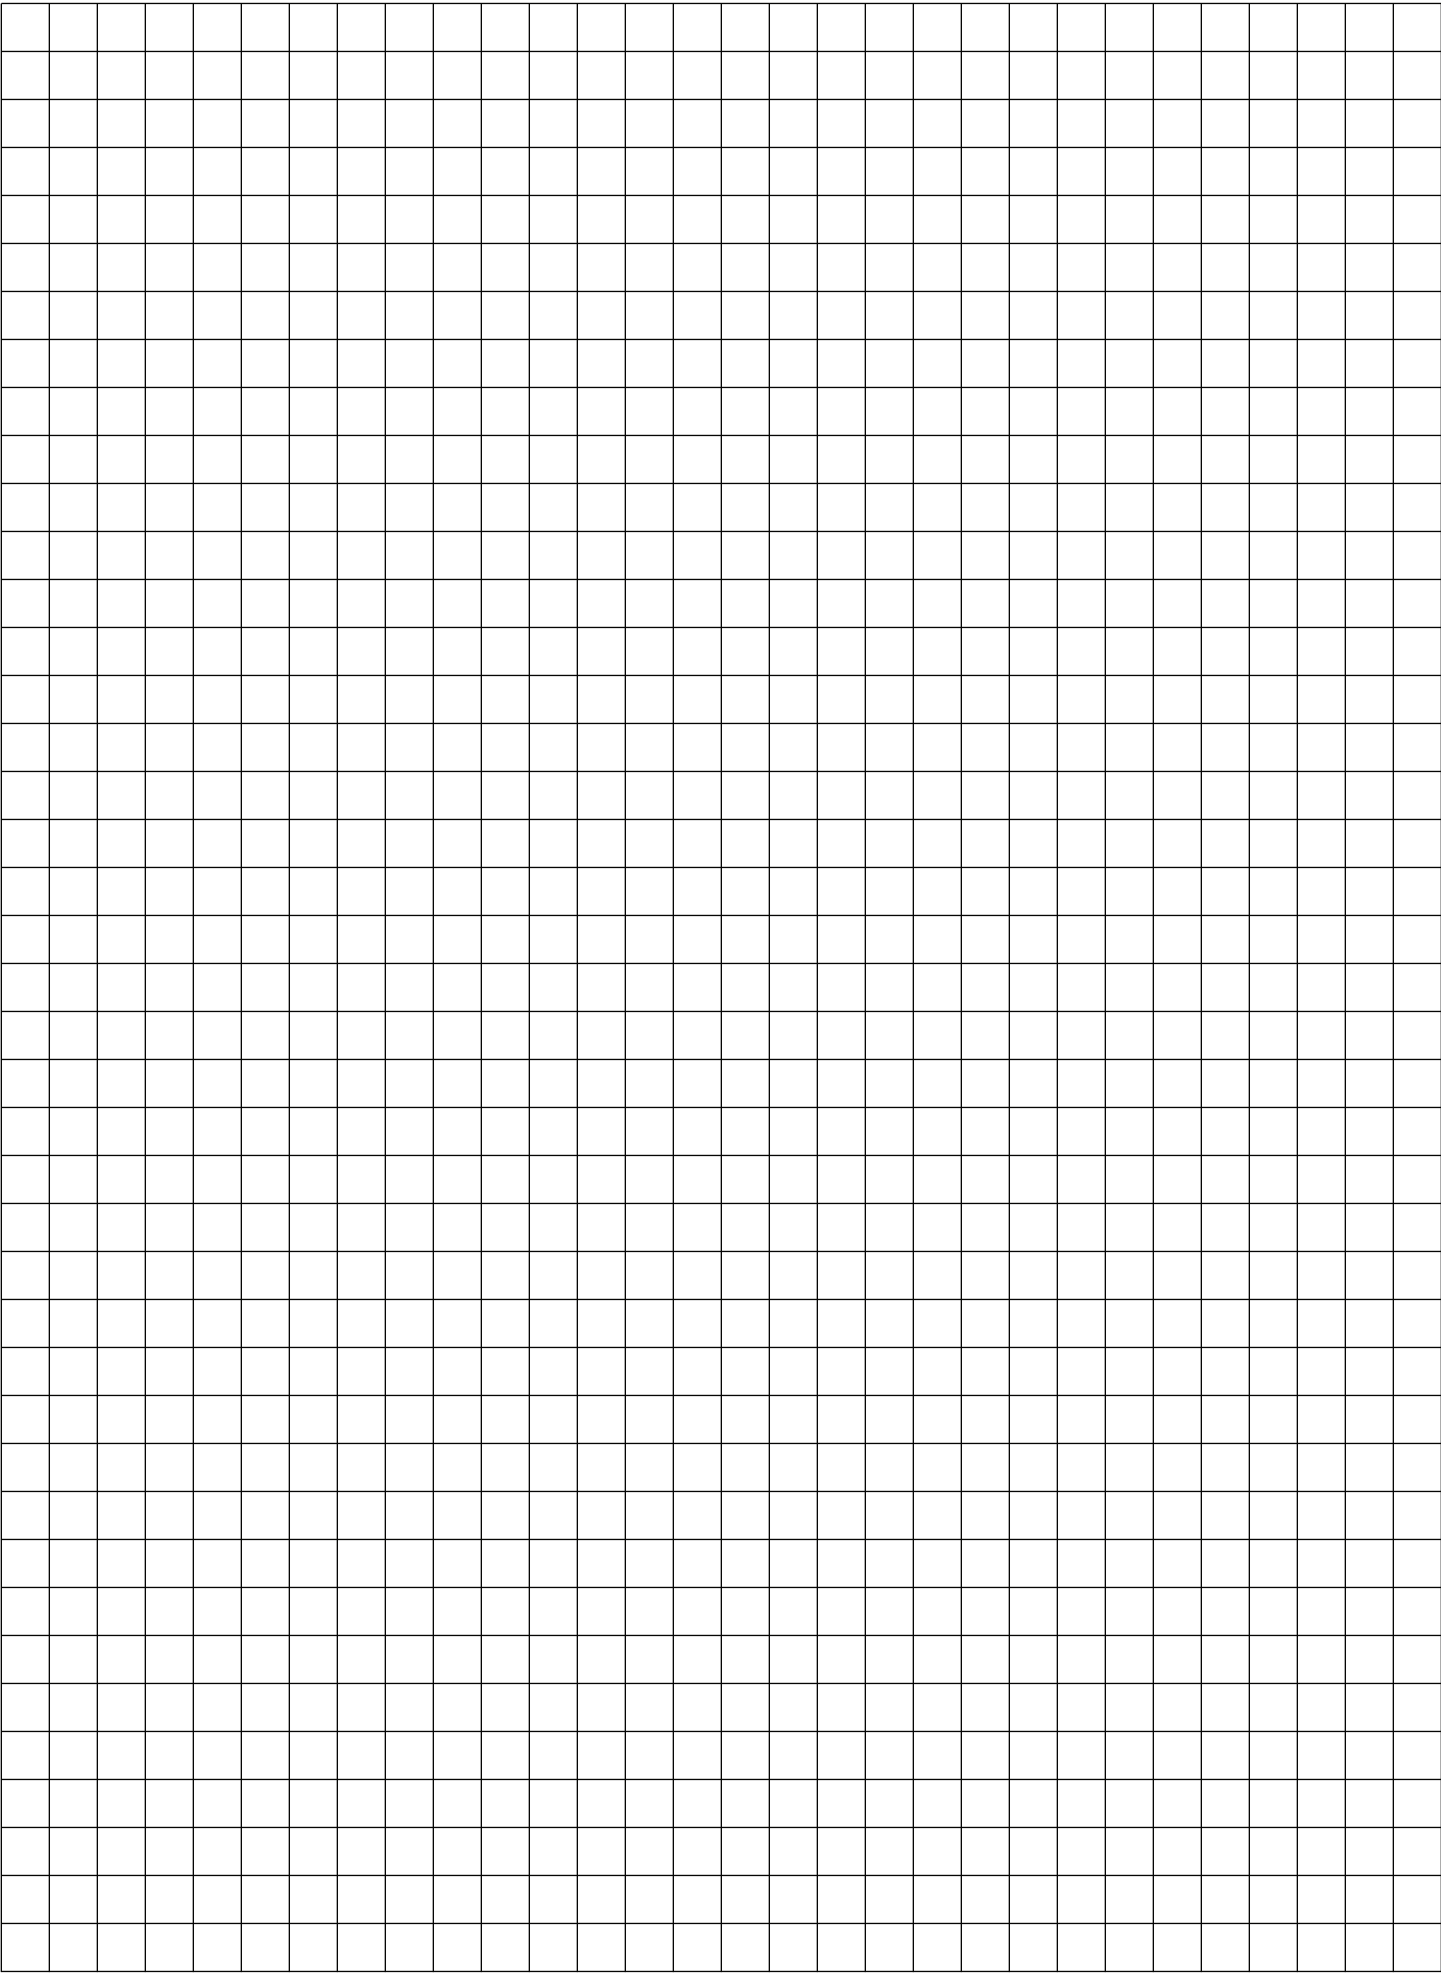



Siplast

14911 Quorum Drive
Suite 600
Dallas, Texas 75254
469-995-2200

Customer Service in
North America:
1-800-922-8800

siplast.com

In Canada:
201 Bewicke Ave., Suite 208
Vancouver, BC,
Canada V7M 3M7
604-929-7687



For information on Siplast
Roofing and Waterproofing
Systems, scan our QR Code.