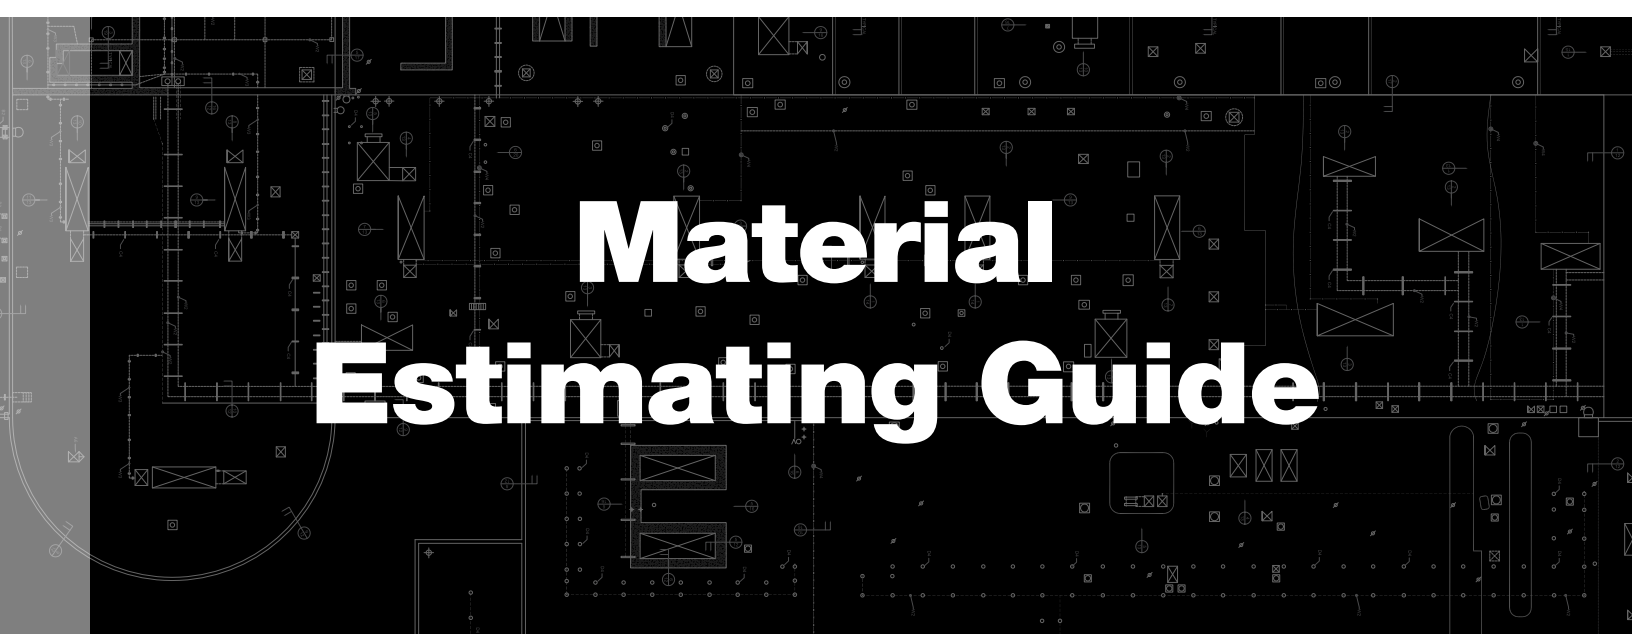
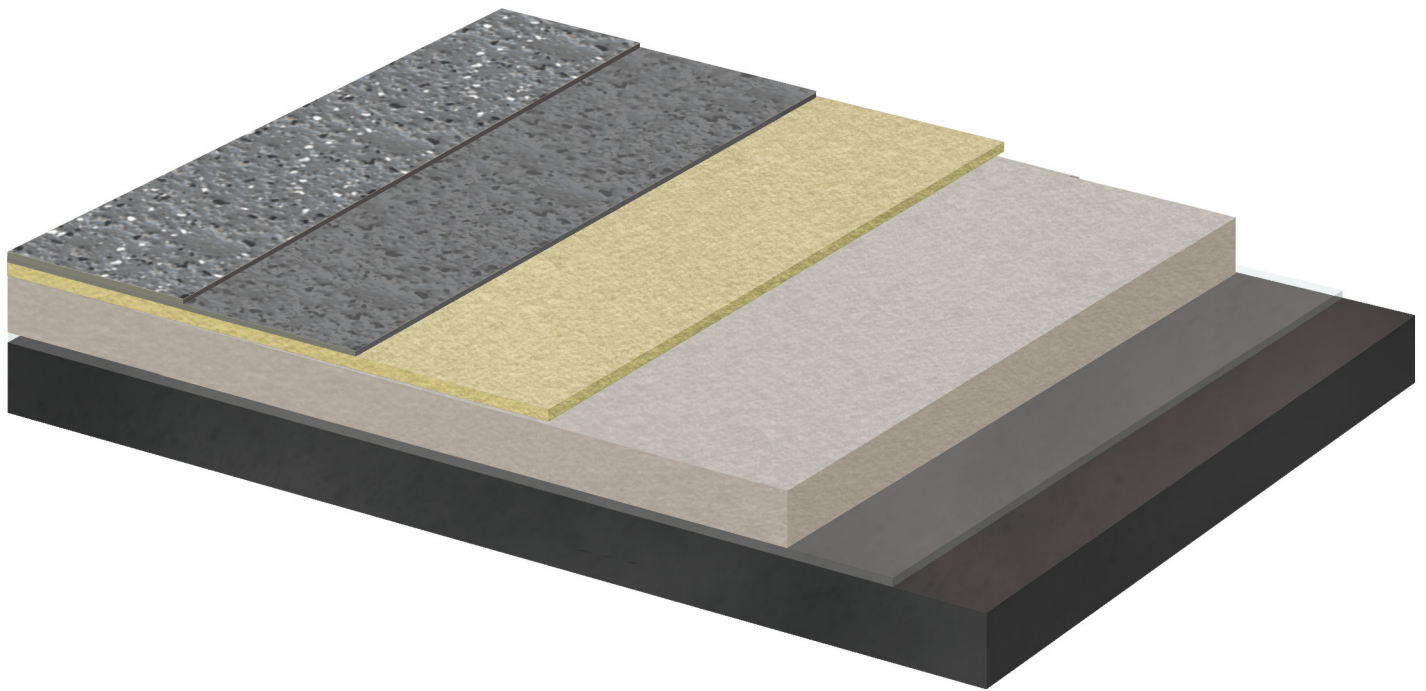



Terapro Waterproofing & Surfacing System (unreinforced)

Pro Natural Quartz / Pro Color Finish Surfacing

A detailed architectural floor plan or technical drawing serves as the background for the lower half of the page. It features various geometric shapes, lines, and symbols typical of a construction blueprint, including walls, doors, windows, and utility lines.

Material Estimating Guide

Terapro Unreinforced – Unoccupied/Unconditioned Space

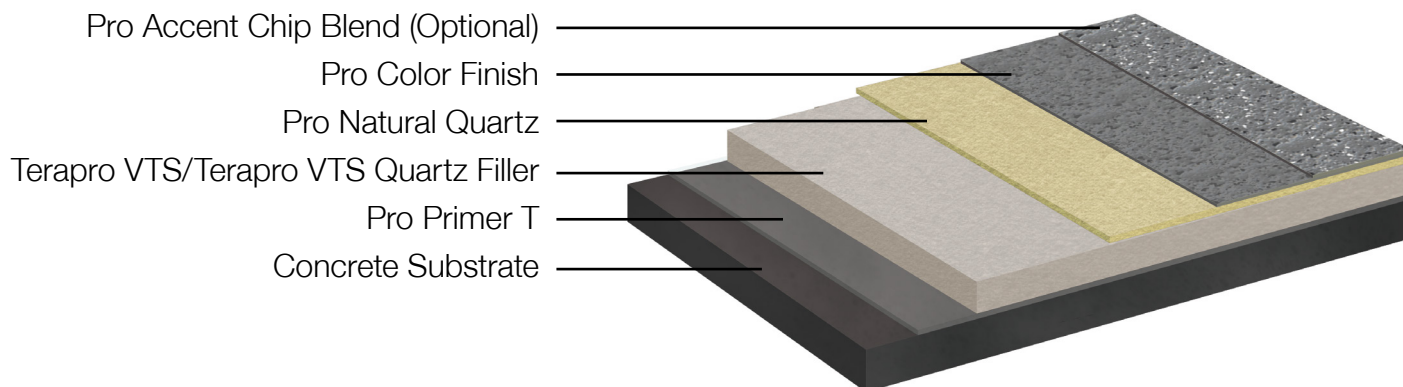

FIELD MEMBRANE

	area to be covered (sf)	s/f coverage per unit	# of units needed	waste factor*	total # of units	Pro Catalyst Liquid (cups) (see catalyst chart)
Primer Layer (concrete substrate) Pro Primer T (10–kg pail) Consumption (min): 0.037 kg/sf Coverage (min): 270 sf/pail	÷	270	=	+	=	Pails Cups
Waterproofing/Wearing Layer Terapro VTS Resin (10–kg pail) Consumption (min): 0.14 kg/sf Coverage (min): 71 sf/pail Terapro VTS Quartz Filler (50 lbs bag) Coverage (min): 71 sf/pail	÷	71	=	+	=	Pails Cups Bags n/a
Surfacing Aggregate Pro Natural Quartz (50 lbs bag) Consumption (min): 1 lb/sf Coverage: 50 sf	÷	50	=	+	=	Bags n/a
Finish Layer Pro Color Finish (10–kg pail) Consumption w/o Pro Accent Chips (min): 0.06 kg/sf Coverage w/o Pro Accent Chips: 166 sf Consumption with Pro Accent Chips (min): 0.07 kg/sf Coverage with Pro Accent Chips: 144 sf	÷	166	=	+	=	Pails Cups Pails Cups
Surfacing Chip (optional)** Pro Accent Chips (5–kg box) Consumption (min): 0.01 kg/sf Coverage: 500 sf	÷	500	=	+	=	Boxes n/a
** Pro Accent Chip consumption/coverage rate will vary depending upon the desired aesthetic.						

CATALYST FOR FLASHING & FIELD

	total # of cups above		cups per container		total # of units
Pro Catalyst Liquid		÷	10	=	
2.5 kg container (10 cups)					Containers

WASTE AND OVERAGE FACTORS

RESIN TYPE	4" COVER	9" COVER	18" COVER
Pro Primer/Pro Color	0.1 kg	0.55 kg	1.1 kg
Terapro Flashing and Base Resin	0.1 kg	0.75 kg	1.5 kg

LAP TREATMENT OVERAGE FACTORS (avg. overage per fleece roll width in %)

PRODUCT	12"	41"
Terapro Flashing and Base Resin	12%	3.5%
Pro Fleece	17%	5%

* Coverage quantities are based upon minimum weight and coverage requirements. The above estimates do not include provisions for crack/joint treatment, detailing, rough absorbent surfaces, or waste (including material required for saturation of disposable roller covers and fleece overlaps).

* To ensure that an adequate quantity of material is purchased for a project, a waste factor should be included in all estimates. The contractor is best qualified to determine actual waste factors.

Pro Catalyst Liquid Mixing Charts

Pro Catalyst Liquid Mixing Chart Pro Primer T and Pro Primer W

Resin Quantity	Ambient Temperature 77°F to 95°F (25°C to 35°C)		Ambient Temperature 41°F to 77°F (5°C to 25°C)		Ambient Temperature 32°F to 41°F (0°C to 5°C)	
	tablespoons	cups	tablespoons	cups	tablespoons	cups
1 kg (1 liter)	2	n/a	4	n/a	6	n/a
10 kg (10 liters)	n/a	1	n/a	2	n/a	3
Substrate temperature range for application of Pro Primers is 32°F to 95°F (0°C to 35°C).						

Pro Catalyst Liquid Mixing Chart Pro Color Finish

Resin Quantity	Ambient Temperature 59°F to 95°F (15°C to 35°C)		Ambient Temperature 41°F to 59°F (5°C to 15°C)		Ambient Temperature 32°F to 41°F (0°C to 5°C)	
	Tablespoons	Cups	Tablespoons	Cups	Tablespoons	Cups
1 kg (1 liter)	2	n/a	4	n/a	6	n/a
10 kg (10 liters)	n/a	1	n/a	2	n/a	3
Substrate temperature range for application of Pro Color Finish is 32°F to 95°F (0°C to 35°C).						

Pro Catalyst Liquid Mixing Chart Summer Grade Terapro Base Resin and Terapro Flashing Resin				
Resin Quantity	Ambient Temperature 68°F to 104°F (20°C to 40°C)		Ambient Temperature 59°F to 68°F (15°C to 20°C)	
	tablespoons	cups	tablespoons	cups
1 kg (0.72 liter)	2	n/a	4	n/a
10 kg (7.2 liters)	n/a	1	n/a	2
Substrate temperature range for application of Summer Grade Terapro Base & Flashing Resins is 59°F to 122°F (15°C to 50°C).				

Pro Catalyst Liquid Mixing Chart Winter Grade Terapro Base Resin and Terapro Flashing Resin						
Resin Quantity	Ambient Temperature 59°F to 68°F (15°C to 20°C)		Ambient Temperature 41°F to 59°F (5°C to 15°C)		Ambient Temperature 23°F to 41°F (-5°C to 5°C)	
	tablespoons	cups	tablespoons	cups	tablespoons	cups
1 kg (0.72 liter)	2	n/a	4	n/a	6	n/a
10 kg (7.2 liters)	n/a	1	n/a	2	n/a	3
Substrate temperature range for application of Winter Grade Terapro Base & Flashing Resins is 23°F to 77°F (-5°C to 25°C).						

Pro Catalyst Liquid Mixing Chart Terapro VTS Resin/Filler (full batch with 10 kg of VTS Resin and full bag of VTS Filler)		
Ambient Temperature 77°F to 95°F (25°C to 35°C)	Ambient Temperature 41°F to 77°F (5°C to 25°C)	Ambient Temperature 32°F to 41°F (0°C to 5°C)
1 cup	2 cups	3 cups
Substrate temperature range for application of Terapro VTS Resin is 32°F to 122°F (0°C to 50°C).		

Pro Catalyst Liquid Mixing Chart Pro Paste Resin						
Resin Quantity	Ambient Temperature 77°F to 95°F (25°C to 35°C)		Ambient Temperature 41°F to 77°F (5°C to 25°C)		Ambient Temperature 32°F to 41°F (0°C to 5°C)	
	Tablespoons	Cups	Tablespoons	Cups	Tablespoons	Cups
1 kg (0.72 liter)	2	n/a	4	n/a	6	n/a
Substrate temperature range for application of Pro Paste Resin is 32°F to 122°F (0°C to 50°C).						

**Siplast**

1000 Rochelle Blvd.

Irving, Texas 75062

469-995-2200

Facsimile: 469-995-2205

Customer Service in

North America:

Toll Free 1-800-922-8800

www.siplast.com

In Canada:

201 Bewicke Ave., Suite 208

Vancouver, BC,

Canada V7M 3M7

604-929-7687



For information on Siplast
Roofing and Waterproofing
Systems, scan our QR Code.