

MAX-A-TACK TTC®

MAX A GUARD™


Trackless Tack Coat Emulsion

MAX-A-TACK TTC® is an anionic trackless tack coat emulsion that is used primarily as a tack coat. This product can also be diluted 10% with water and used as a fog seal. MAX-A-TACK TTC® is manufactured to meet applicable state specifications.



✓ Benefits

- Lower application rate than most conventional tack coats, resulting in application cost savings
- Fast cure time
- Increases bond strength
- Can also be diluted 10% with water and used as a fog seal
- >50% solids

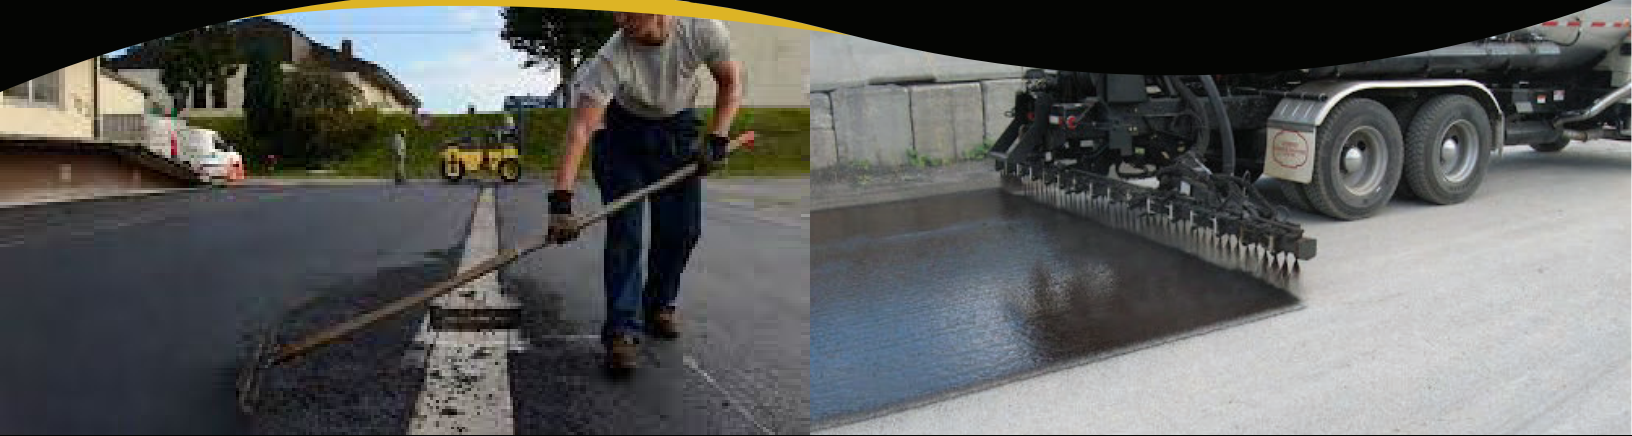

- Usage**
- Asphalt
 - Exterior Surfaces
 - Sidewalks, streets, bridges, etc.

- Standards**
- Zero VOCs
 - U.S. EPA, SCAQMD, CARB and OTC compliant

- Packaging**
- 5 gallon pails (18 liters)
 - 55 gallon drums (208.2 liters)
 - 275 gallon tote (1,041 liters)

TYPICAL PERFORMANCE DATA

<u>Specification</u>	<u>Minimum</u>	<u>Maximum</u>
Viscosity, seconds (T72)	0	100
Sieve Test, % (T59)	0.00	0.10
Residue by Distillation, % (T59)	50	-
Oil Distillate, % (T59)	0	3
Penetration (T49)	0	40