

Spec Formliners, Inc.


Impressive on Concrete

Pattern Number: **5554B**

Coastal Fieldstone

1-1/2" (38mm) maximum relief
 1.60" to 20" width rocks
 1.50" to 10.60" height rocks
 Individual rock shapes may vary

Note:
 Panels available in 4'x8'

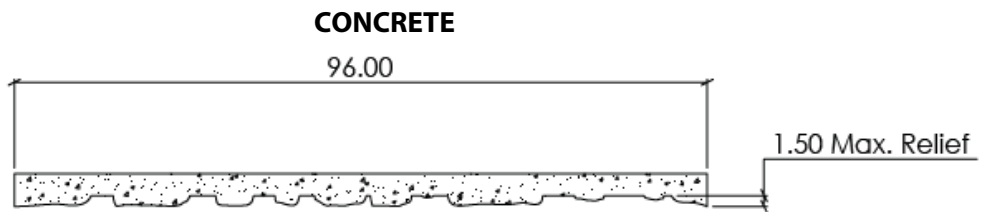

Visit www.specformliners.com for application guides and technical information

ThermoSpec™
 SINGLE OR MULTI-USE PLASTIC

Property	HIPS	ABS
Tensile D638	3700	5300
IFlexural D7905	-	9300
Hardness D786	-	105
Material Weights - lbs/ft²		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843
Thicknesses Available		
0.070, 0.090, 0.110, 0.145, 0.155, 0.180		

ElastoSpec Lite™ Semi-Elastomeric
 MULTI-USE MATERIAL

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
Material Weights - lbs/ft²		
Varies by Pattern		
Maximum Thickness		
1/4" + Relief		

ElastoSpec™ 100% Solid Urethane
 BONDED TO 3/4" PLYWOOD

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft²		
Varies by Pattern		
Maximum Thickness		
1-1/8" + Relief		

Call for ThermoSpec™ Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available
 ElastoSpec™ Customized Panel Sizes and Art Panels



Spec Formliners, Inc.


Impressive on Concrete

Pattern Number: **5554B**


Coastal Fieldstone

- 1-1/2" (38mm) maximum relief
- 1.60" to 20" width rocks
- 1.50" to 10.60" height rocks
- Individual rock shapes may vary

Note:
Panels available in 4'x8'

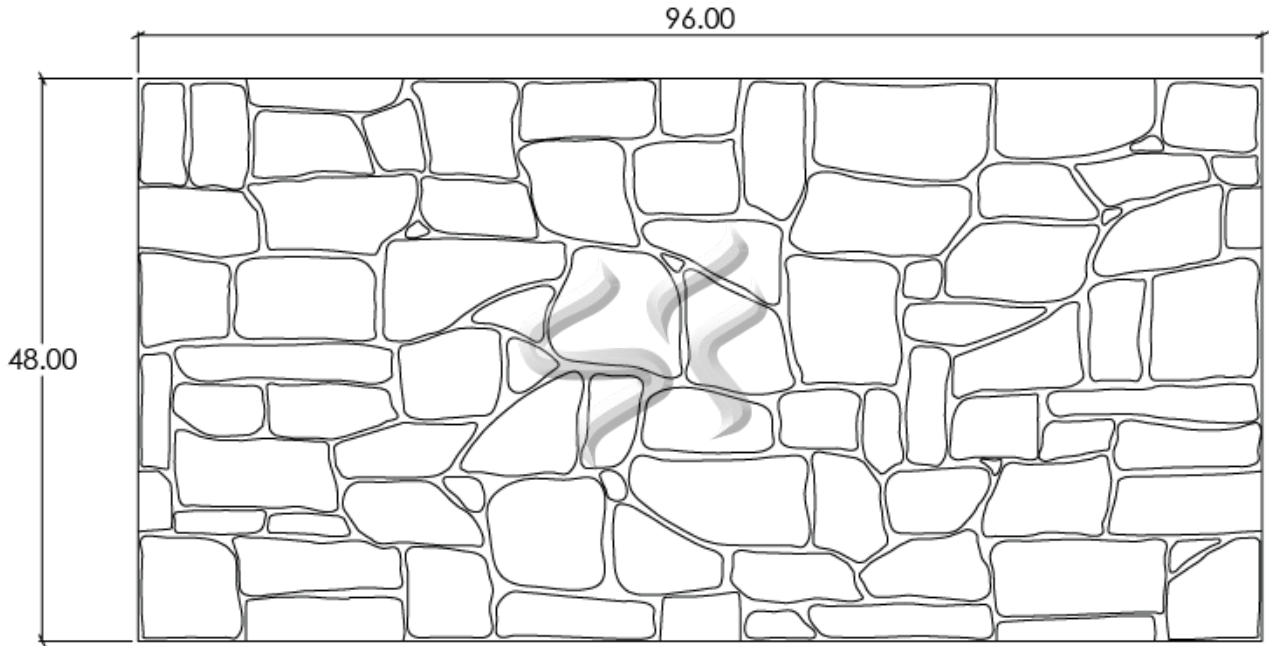

PANEL B

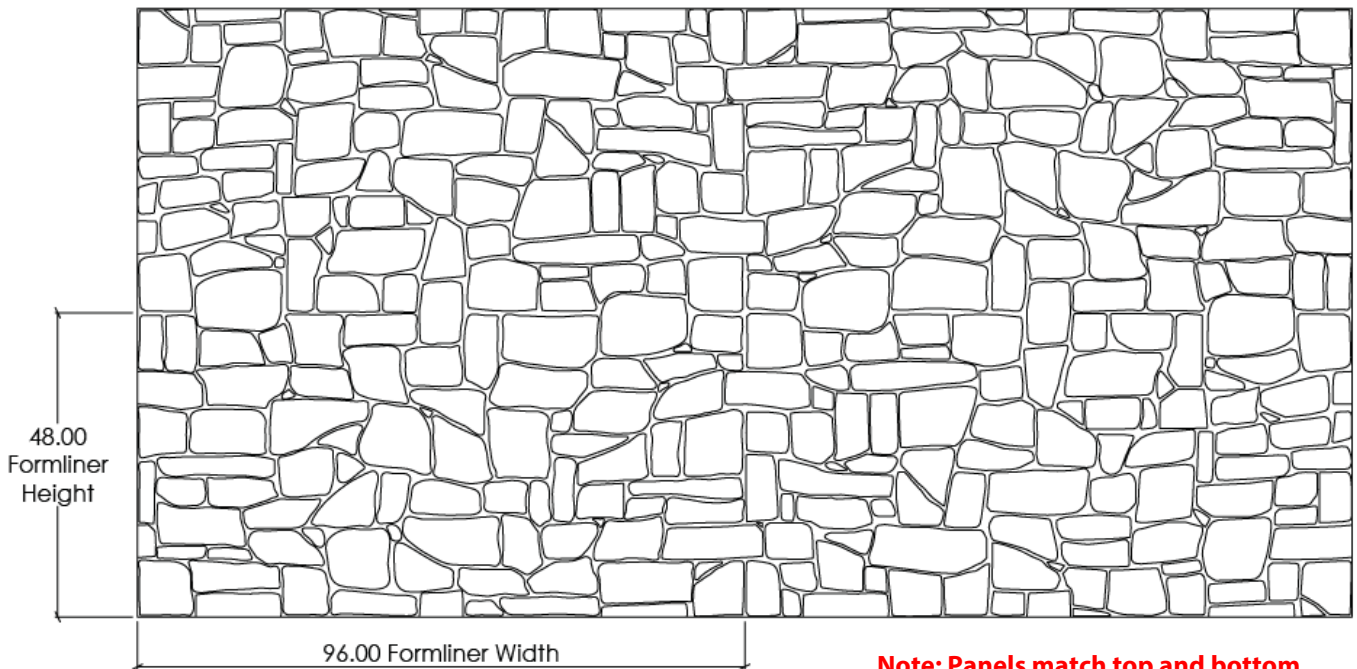

Note: Panels match top and bottom, side to side and rotated 180°.