

5561



Pattern Number:

CG American Stone

1/2" (13mm) mortar joint
 1" (25mm) maximum relief
 7" (178mm) vertical C-C
 10" to 30" width stones
 42"x120" panel size
 Pattern 5503 modified to 1" relief
 and 7" vertical C-C

Spec Formliners, Inc.

Impressive on Concrete

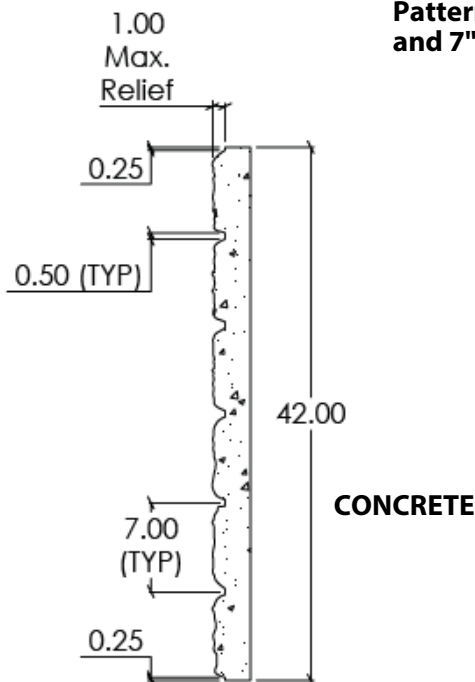

Visit www.specformliners.com for application guides and technical information

ThermoSpec™ SINGLE OR MULTI-USE PLASTIC

Property	HIPS	ABS
Tensile D638	3700	5300
I Flexural D7905	-	9300
Hardness D786	-	105
Material Weights - lbs/ft²		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843
Thicknesses Available		
0.070, 0.090, 0.110, 0.145, 0.155, 0.180		

ElastoSpec Lite™ Semi-Elastomeric MULTI-USE MATERIAL

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
Material Weights - lbs/ft²		
Varies by Pattern		
Maximum Thickness		
1/4" + Relief		

ElastoSpec™ 100% Solid Urethane BONDED TO 3/4" PLYWOOD

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft²		
Varies by Pattern		
Maximum Thickness		
1-1/8" + Relief		

Call for ThermoSpec™ Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available

ElastoSpec™ Customized Panel Sizes and Art Panels





Spec Formliners, Inc.

Impressive on Concrete

Pattern Number: **5561**

CG American Stone

- 1/2" (13mm) mortar joint
- 1" (25mm) maximum relief
- 7" (178mm) vertical C-C
- 10" to 30" width stones
- 42"x120" panel size
- Pattern 5503 modified to 1" relief and 7" vertical C-C

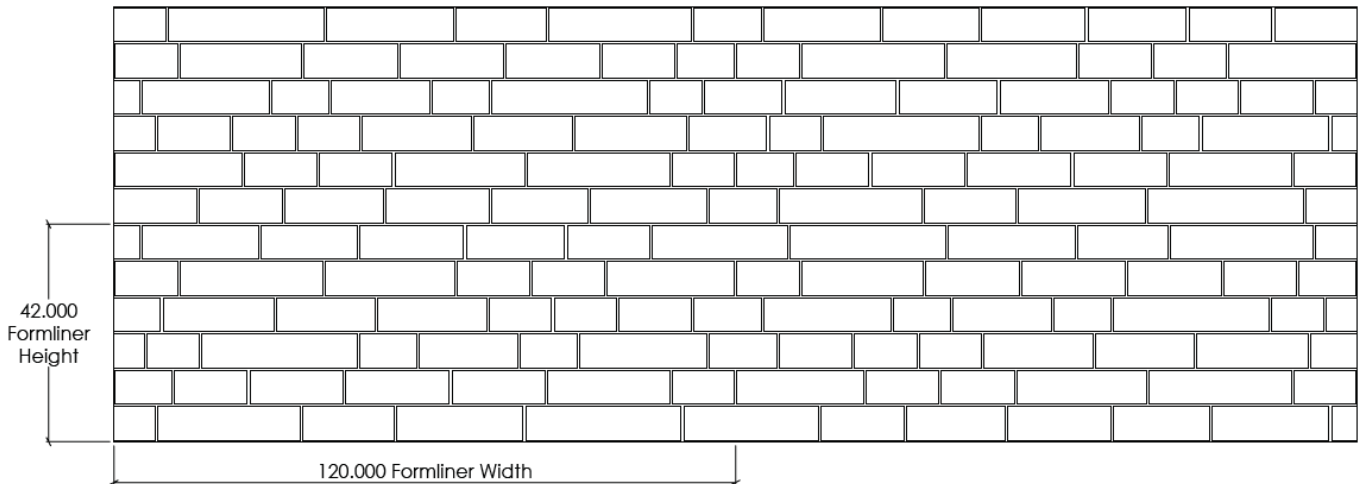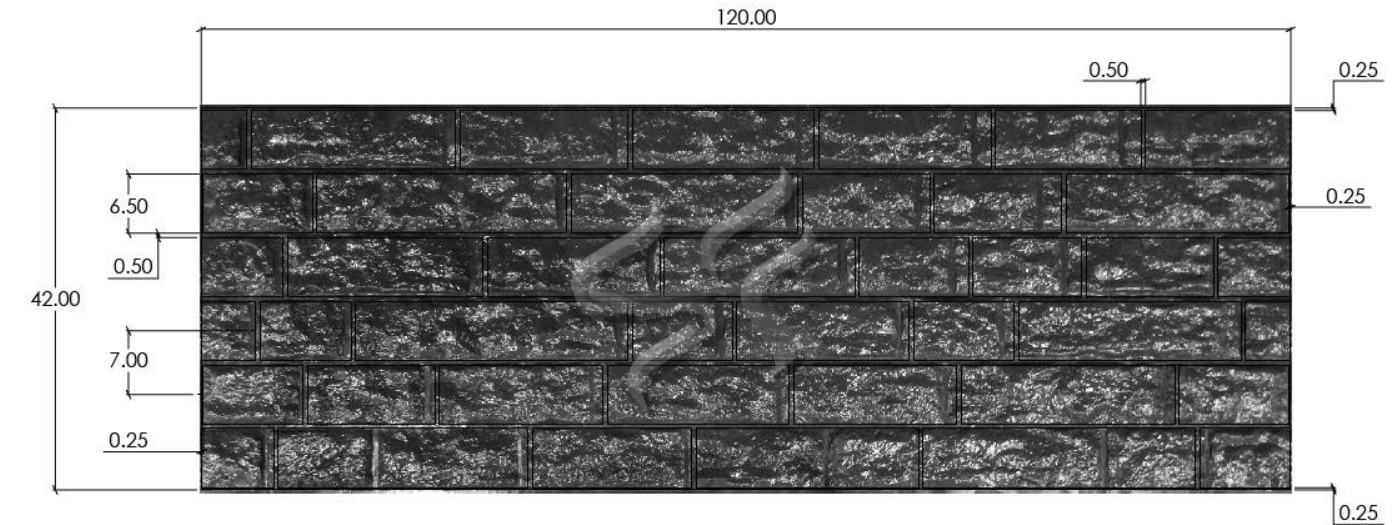

Note: Panels match top and bottom, side to side and rotated 180°.