

Spec Formliners
INCORPORATED
ROCK

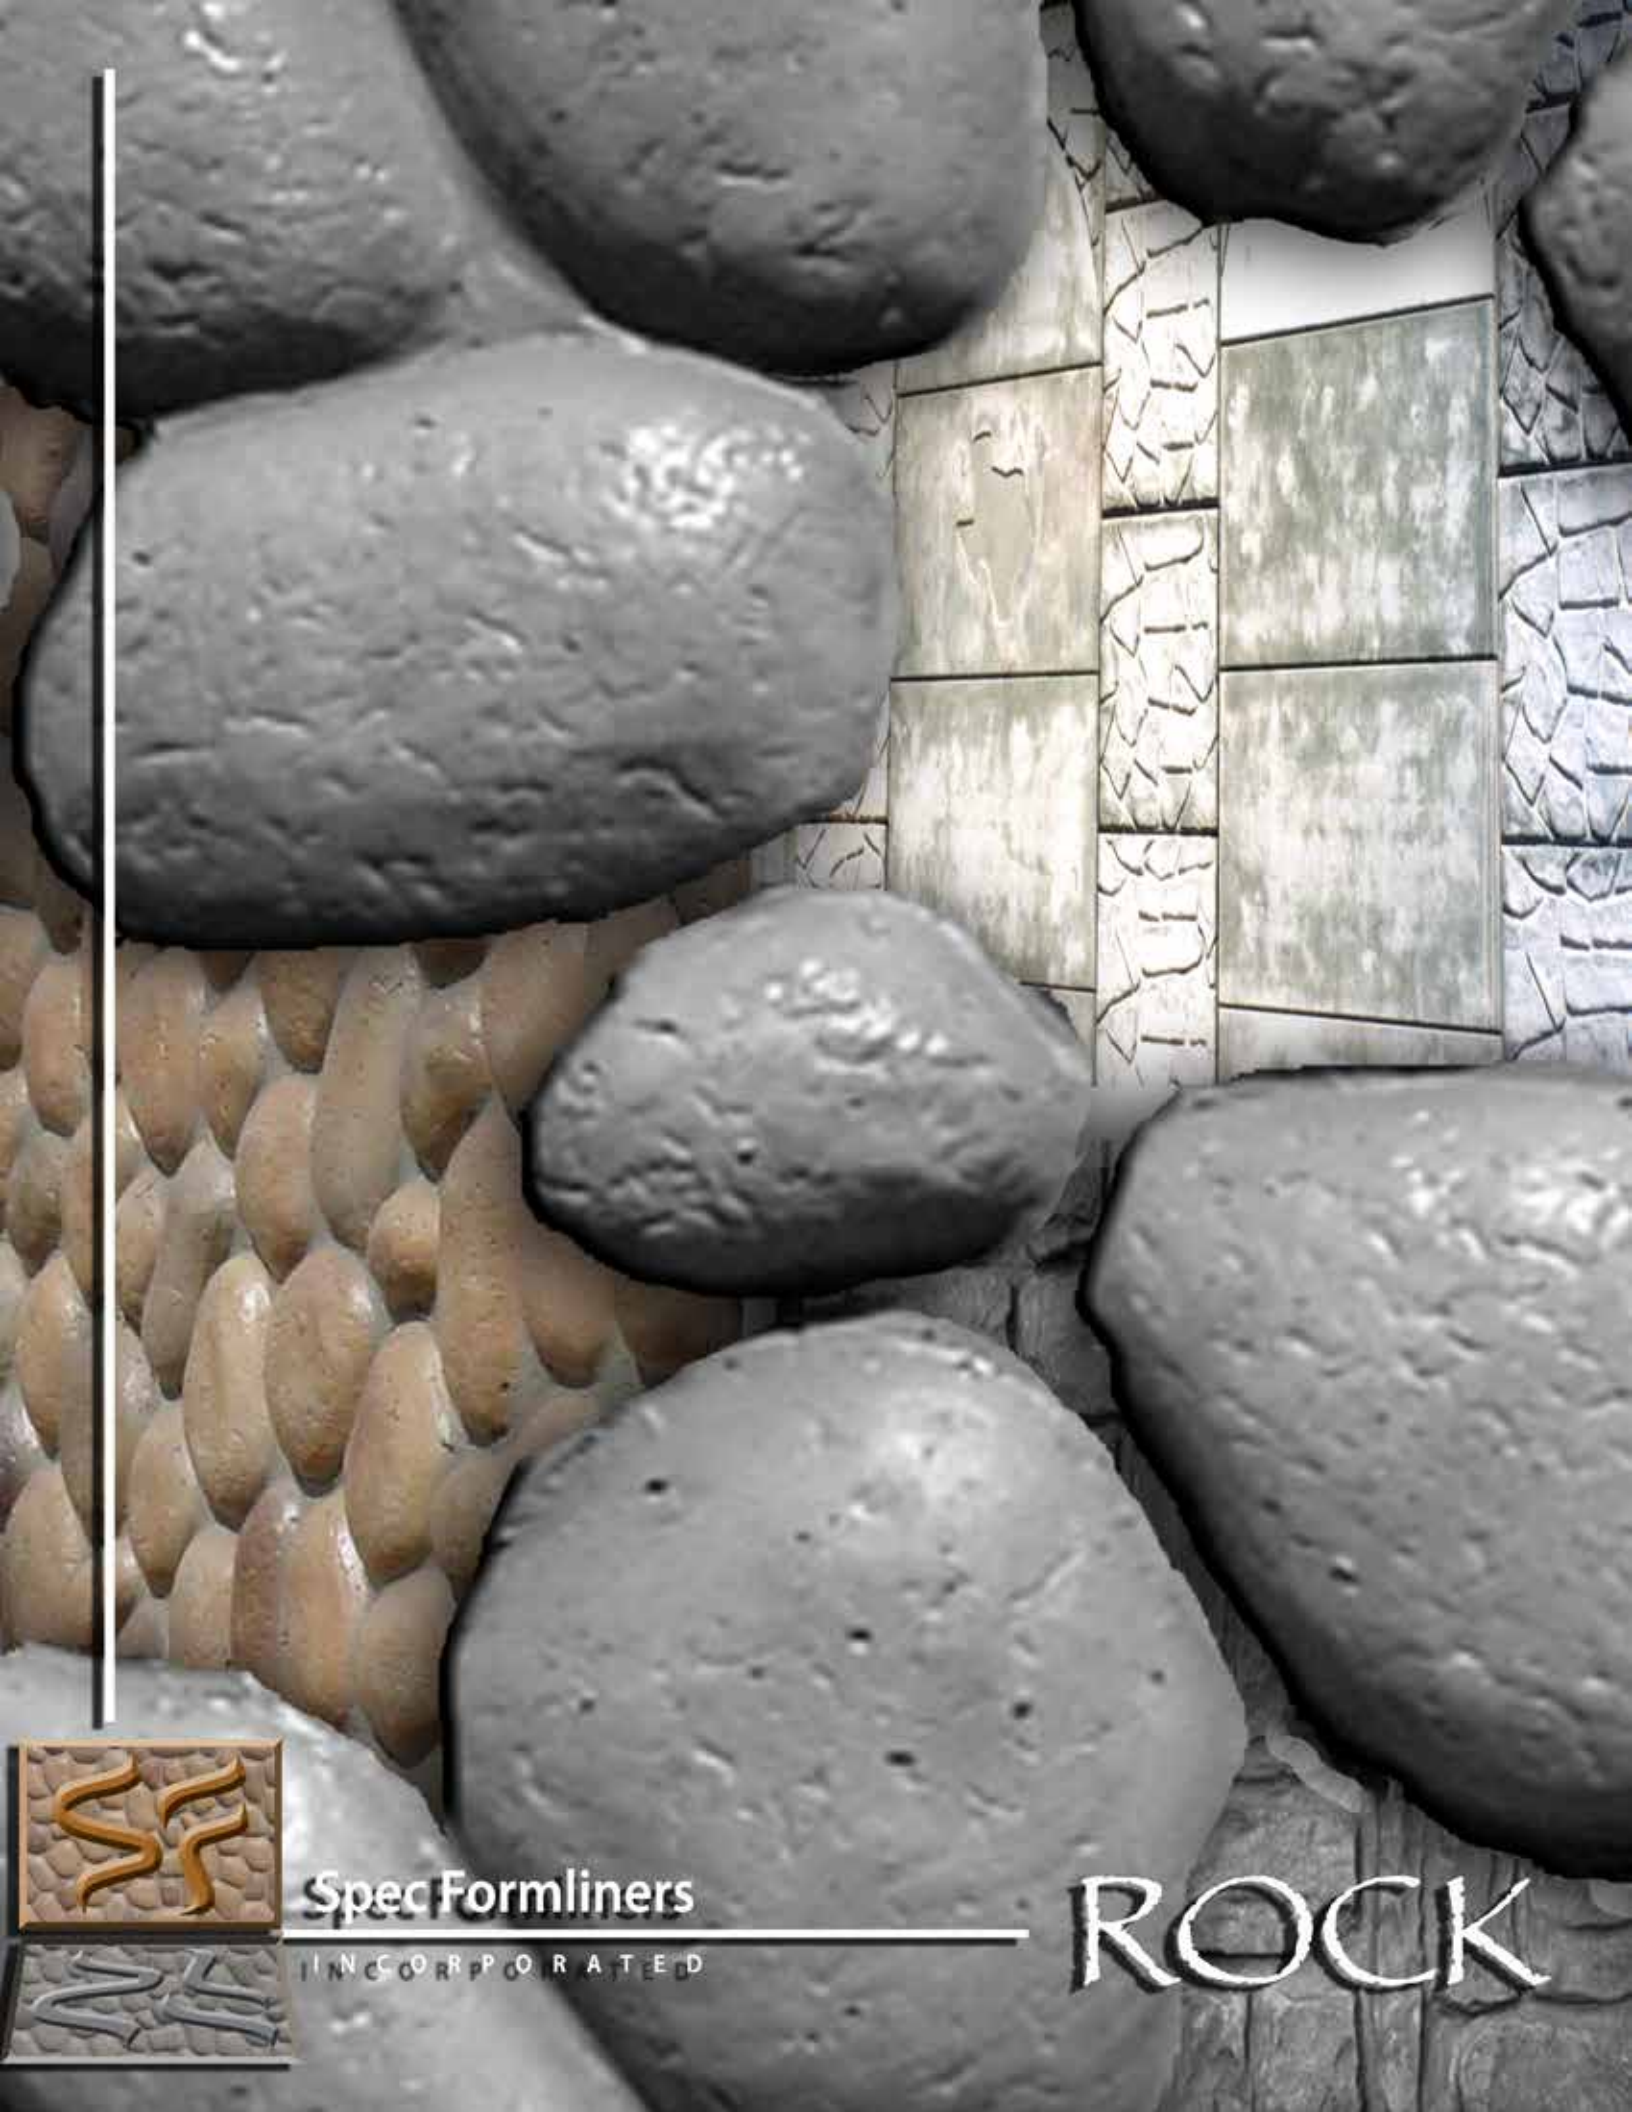


From Colorado Flagstone, to Kona Rocks, to Chiseled Limestone, Spec flawlessly simulates the naturally occurring strata of any region.

Spec's stunning rock patterns add realistic beauty to any project.

Their exquisite display as well as cost-effectiveness makes Spec's Rock patterns ideal for freeway walls, MSE walls, foundations, and bridges.

With an ever-growing pattern collection, Spec is sure to offer the right design for your project.



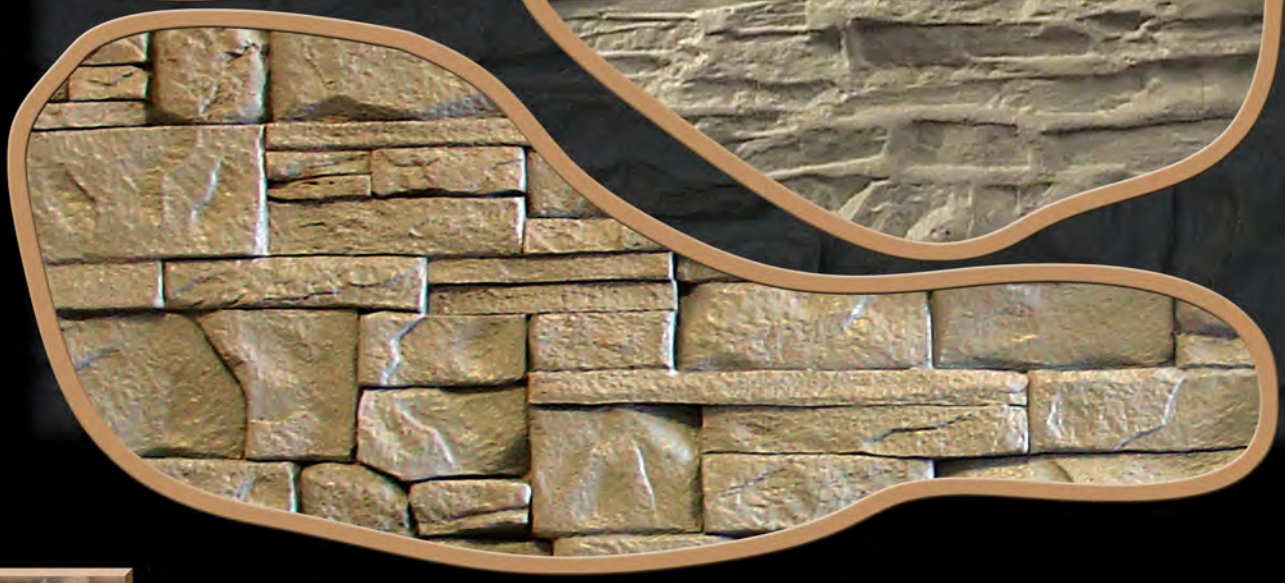

Spec Formliners, Inc.


Impressive On Concrete

Spec Formliners, Inc.
Impressive on Concrete


Pattern Number: **1501**

Dry Stack Fieldstone

Dry stack fieldstone rock size 3" to 18"
1" max. depth

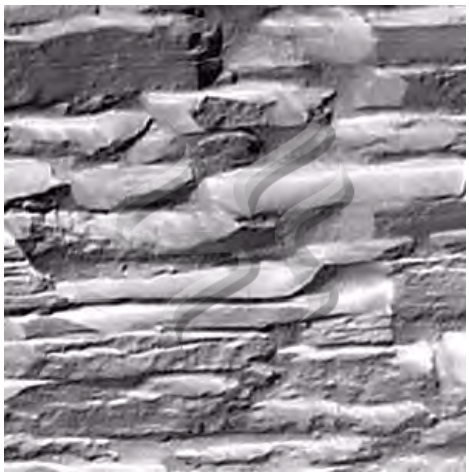

CONCRETE

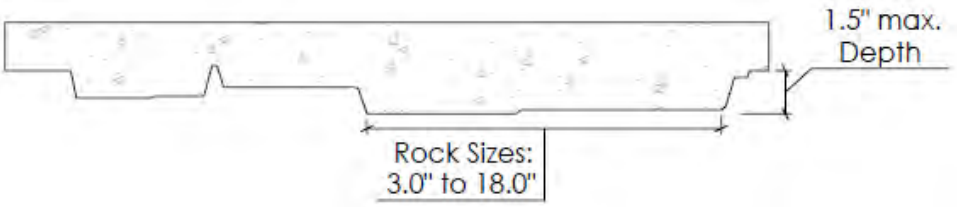

Visit **www.specformliners.com** for application guides and technical information

ThermoSpec^{tm}
SINGLE OR MULTI-USE PLASTIC

Property	HIPS	ABS
Tensile D638	3700	5300
IFlexural D7905	-	9300
Hardness D786	-	105
Material Weights - lbs/ft^2		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843
Thicknesses Available		
0.070, 0.090, 0.110, 0.145, 0.155, 0.180		

ElastoSpec Lite^{tm} Semi-Elastomeric
MULTI-USE MATERIAL

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1/4" + Relief		

ElastoSpec^{tm} 100% Solid Urethane
BONDED TO 3/4" PLYWOOD

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1-1/8" + Relief		

Call for ThermoSpec^{tm} Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available
ElastoSpec^{tm} Customized Panel Sizes and Art Panels

Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460

Spec Formliners, Inc.


Impressive on Concrete

Pattern Number: **1501**

Dry Stack Fieldstone

Dry stack fieldstone rock size 3" to 18"
1" max. depth



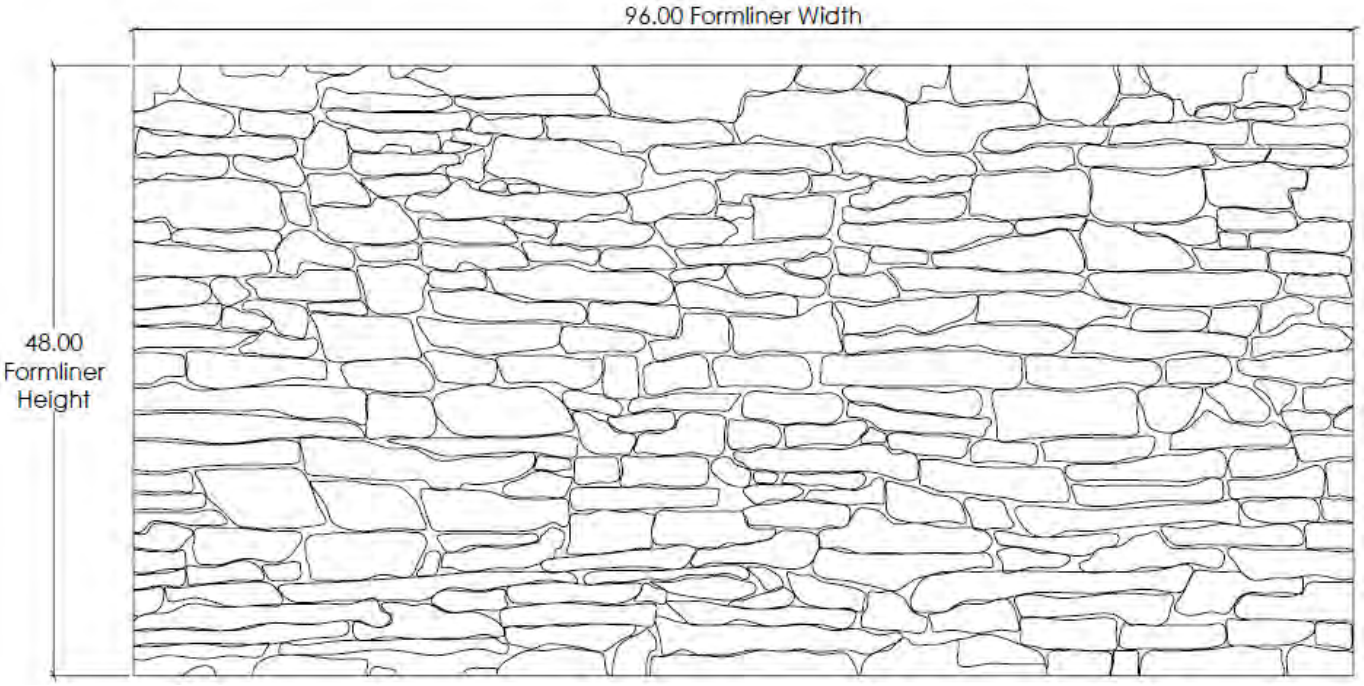

Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460

Spec Formliners, Inc.
Impressive on Concrete


Pattern Number: **1502**

Ashlar Stone

Rock Sizes - 2-1/2" to 9"
1-1/4" depth, 3/8" to 1-1/4" mortar joint



CONCRETE

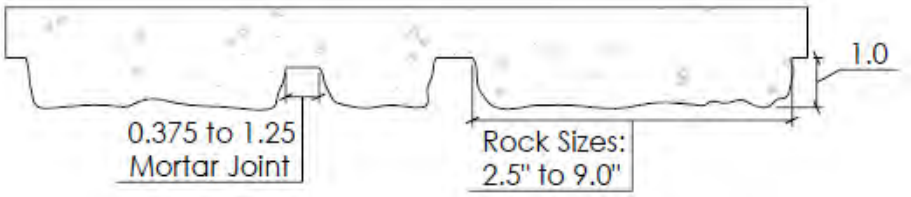

Visit **www.specformliners.com** for application guides and technical information

ThermoSpec^{tm}
SINGLE OR MULTI-USE PLASTIC

Property	HIPS	ABS
Tensile D638	3700	5300
IFlexural D7905	-	9300
Hardness D786	-	105
Material Weights - lbs/ft^2		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843
Thicknesses Available		
0.070, 0.090, 0.110, 0.145, 0.155, 0.180		

ElastoSpec Lite^{tm} Semi-Elastomeric
MULTI-USE MATERIAL

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1/4" + Relief		

ElastoSpec^{tm} 100% Solid Urethane
BONDED TO 3/4" PLYWOOD

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1-1/8" + Relief		

Call for ThermoSpec^{tm} Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available
ElastoSpec^{tm} Customized Panel Sizes and Art Panels


Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460


Spec Formliners, Inc.
Impressive on Concrete

Pattern Number: **1502**

Ashlar Stone

Rock Sizes - 2-1/2" to 9"
1-1/4" depth, 3/8" to 1-1/4" mortar joint

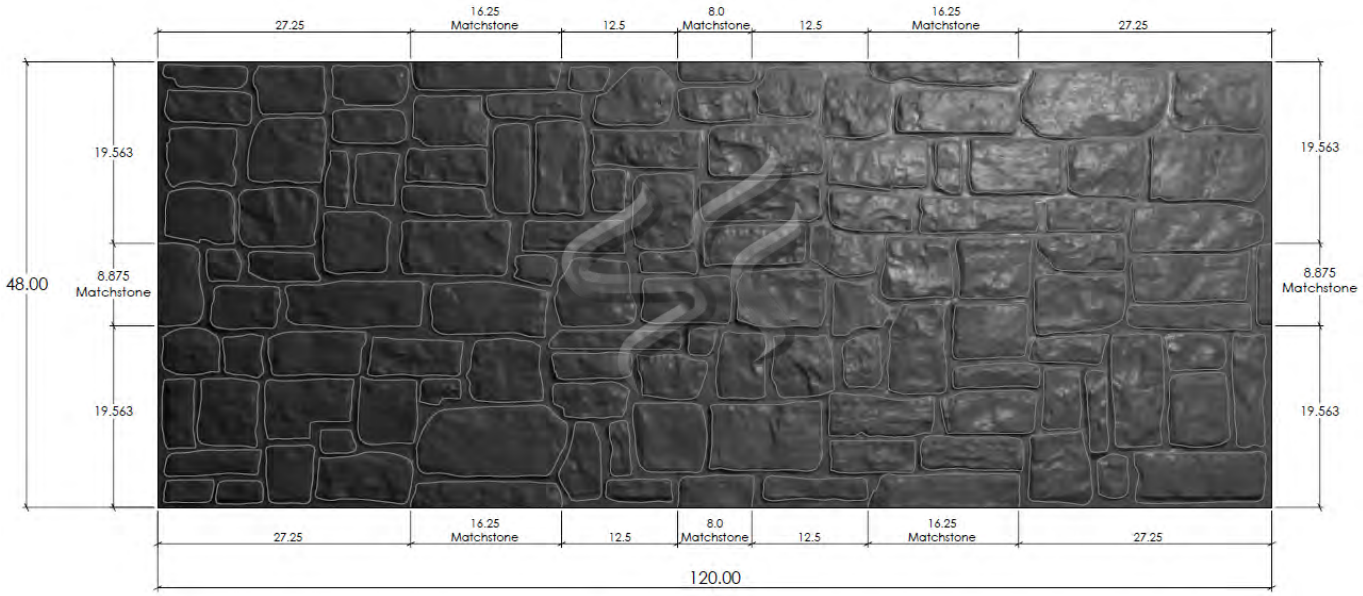

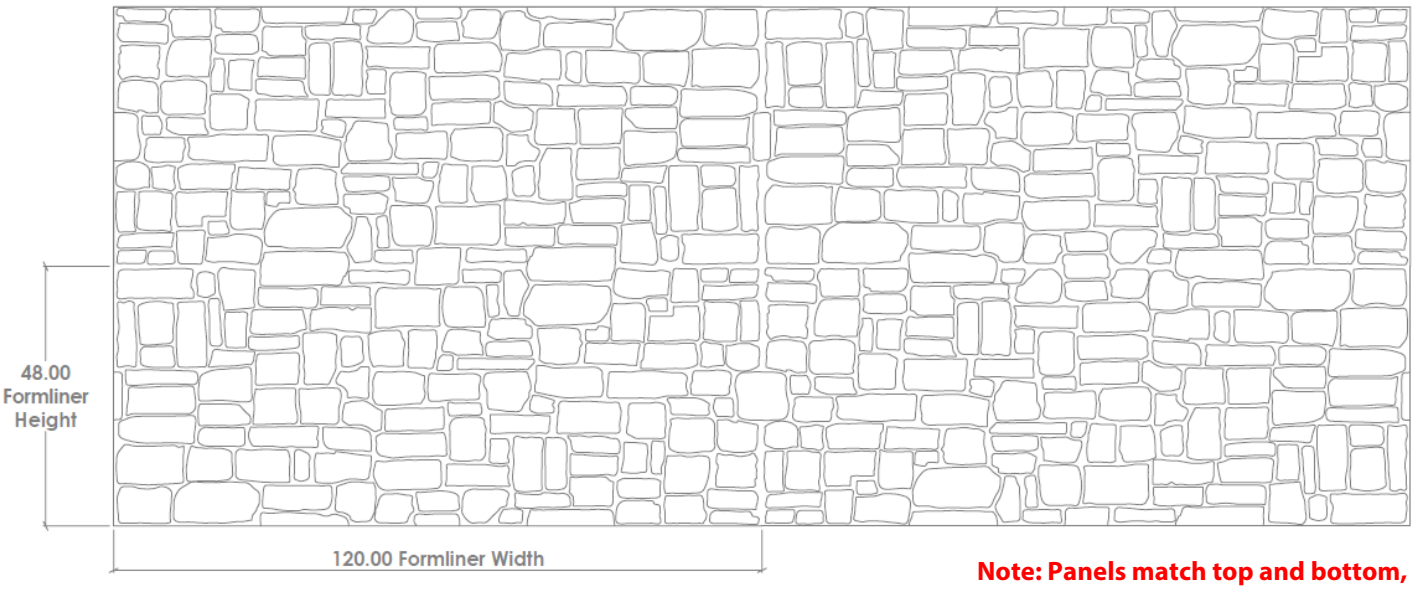

Note: Panels match top and bottom, side to side and rotated180°.

Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460

Spec Formliners, Inc.
Impressive on Concrete


Pattern Number: **1503**

Red E Cobblestone

Rock Sizes - 11" to 18" wide by 9" height
1-1/2" depth
3/4" mortar joint



CONCRETE

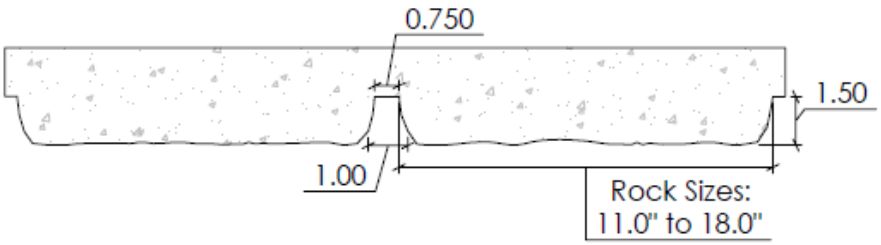

Visit **www.specformliners.com** for application guides and technical information

ThermoSpec^{tm}
SINGLE OR MULTI-USE PLASTIC

Property	HIPS	ABS
Tensile D638	3700	5300
IFlexural D7905	-	9300
Hardness D786	-	105
Material Weights - lbs/ft^2		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843
Thicknesses Available		
0.070, 0.090, 0.110, 0.145, 0.155, 0.180		

ElastoSpec Lite^{tm} Semi-Elastomeric
MULTI-USE MATERIAL

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1/4" + Relief		

ElastoSpec^{tm} 100% Solid Urethane
BONDED TO 3/4" PLYWOOD

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1-1/8" + Relief		

Call for ThermoSpec^{tm} Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available
ElastoSpec^{tm} Customized Panel Sizes and Art Panels

Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460

Spec Formliners, Inc.


Impressive on Concrete

Pattern Number: **1503**

Red E Cobblestone

Rock Sizes - 11” to 18” wide by 9” height
1-1/2” depth
3/4” mortar joint



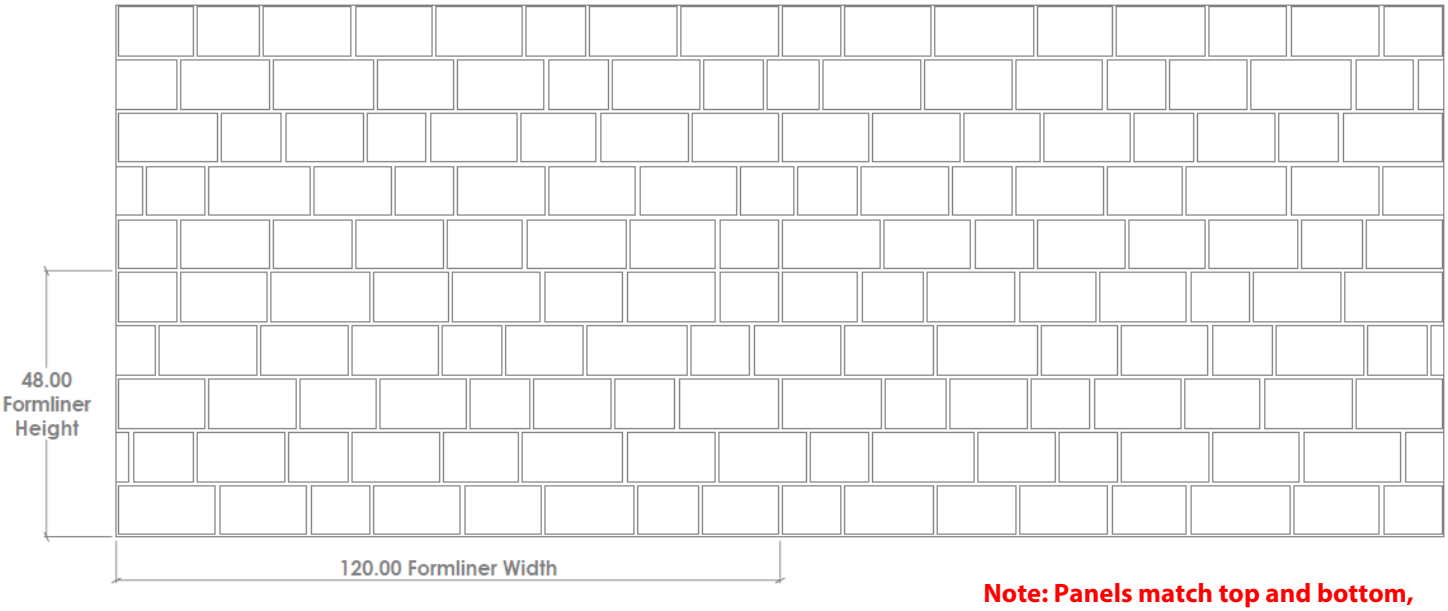

Note: Panels match top and bottom, side to side and rotated180°.


Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460


Spec Formliners, Inc.
Impressive on Concrete

Pattern Number: **1505**

Madera Flagstone

8” to 24” rock sizes - 1-3/4" to 2" relief
1/2” to 1” mortar joint, large irregular stone

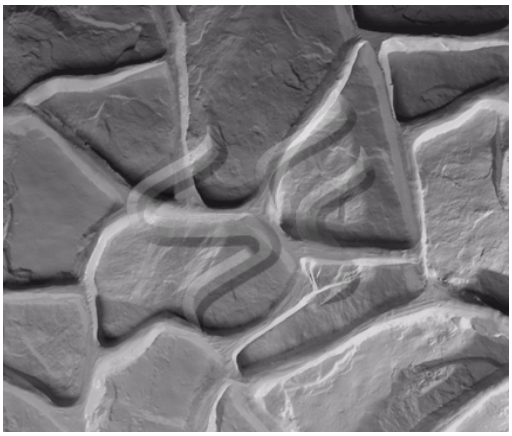

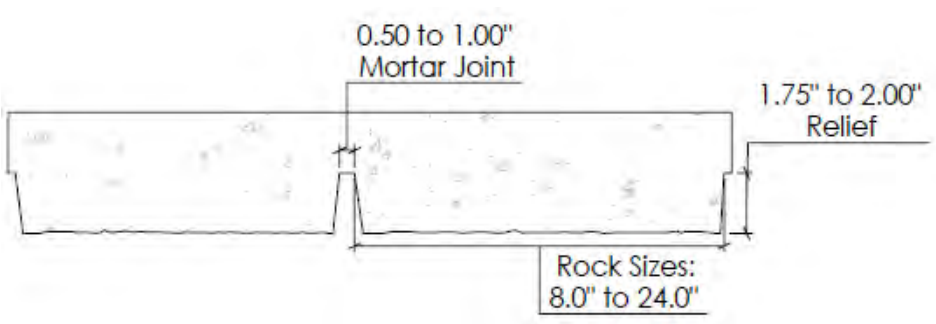

Visit **www.specformliners.com** for application guides and technical information

ThermoSpec[tm]
SINGLE OR MULTI-USE PLASTIC

Property	HIPS	ABS
Tensile D638	3700	5300
IFlexural D7905	-	9300
Hardness D786	-	105
Material Weights - lbs/ft^2		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843
Thicknesses Available		
0.070, 0.090, 0.110, 0.145, 0.155, 0.180		

ElastoSpec Lite[tm] Semi-Elastomeric
MULTI-USE MATERIAL

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1/4" + Relief		

ElastoSpec[tm] 100% Solid Urethane
BONDED TO 3/4” PLYWOOD

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1-1/8" + Relief		

Call for ThermoSpec[tm] Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available
ElastoSpec[tm] Customized Panel Sizes and Art Panels


Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460


Spec Formliners, Inc.
Impressive on Concrete

Pattern Number: **1505**

Madera Flagstone

8” to 24” rock sizes - 1-3/4" to 2" relief
1/2” to 1” mortar joint, large irregular stone

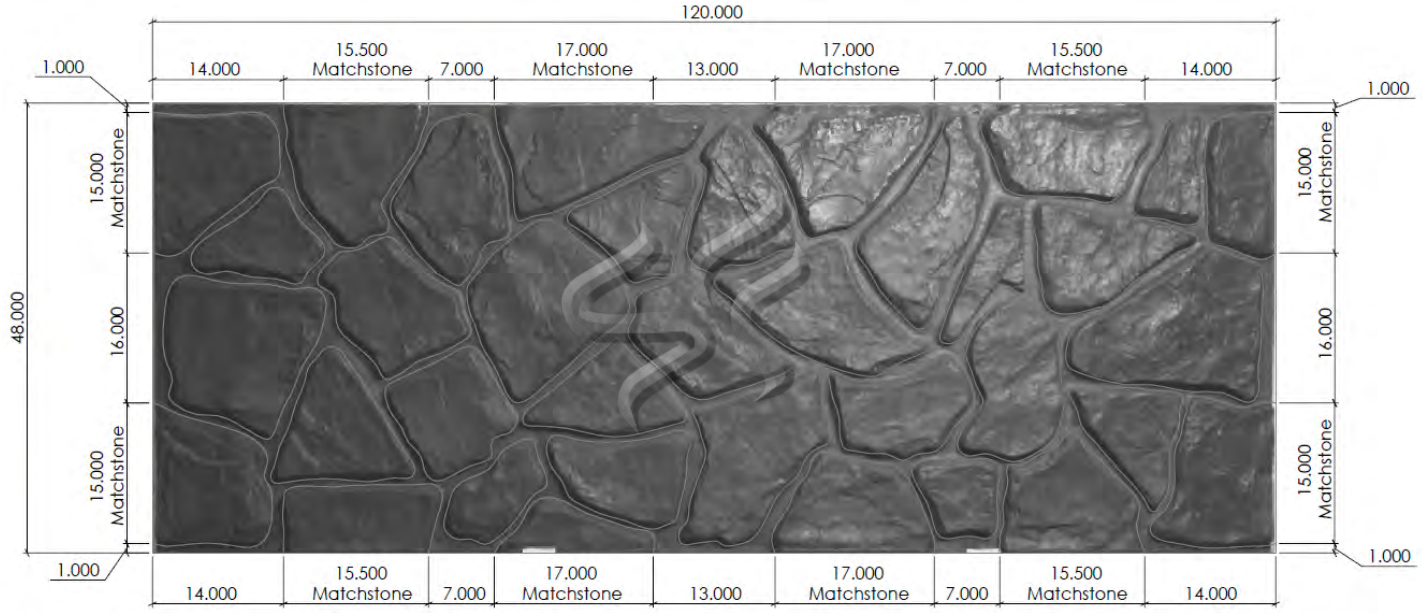

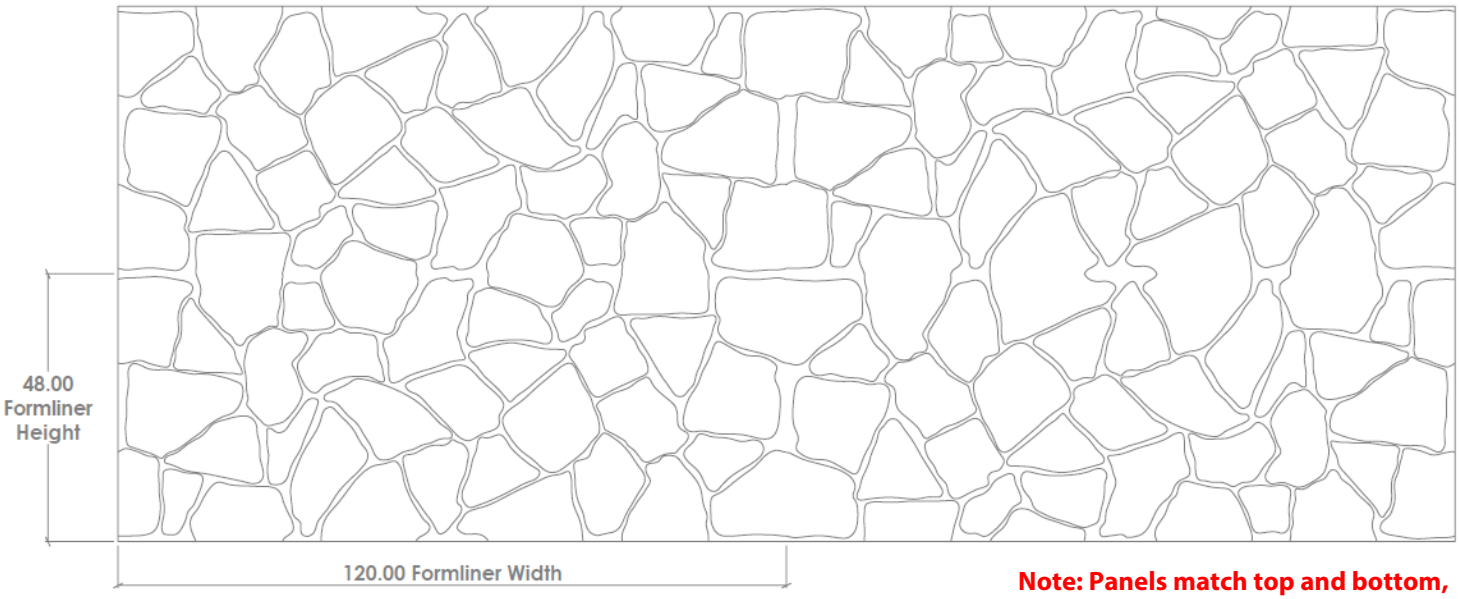

Note: Panels match top and bottom, side to side and rotated 180°.


Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460


Spec Formliners, Inc.
Impressive on Concrete

Pattern Number: **1506**

Random Block Ashlar Stone

1-1/2" deep block Ashlar Stone , 4" to 42" stone, 1" deep by 1-1/2" wide mortar joint.

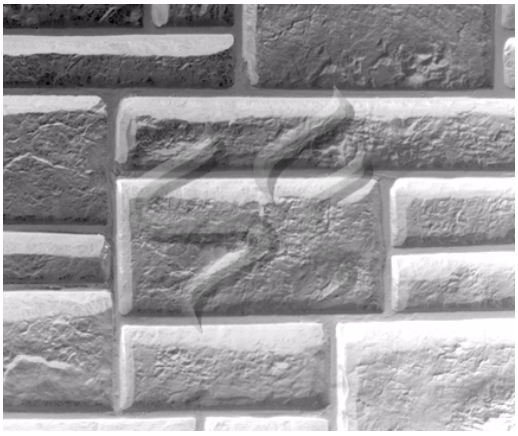

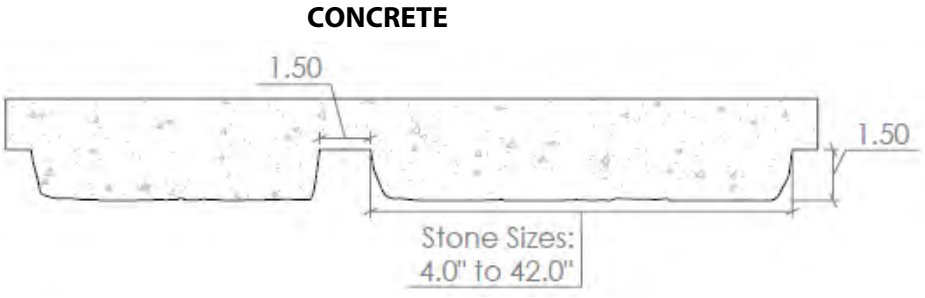

Visit **www.specformliners.com** for application guides and technical information

ThermoSpec^{tm}
SINGLE OR MULTI-USE PLASTIC

Property	HIPS	ABS
Tensile D638	3700	5300
IFlexural D7905	-	9300
Hardness D786	-	105
Material Weights - lbs/ft^2		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843
Thicknesses Available		
0.070, 0.090, 0.110, 0.145, 0.155, 0.180		

ElastoSpec Lite^{tm} Semi-Elastomeric
MULTI-USE MATERIAL

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1/4" + Relief		

ElastoSpec^{tm} 100% Solid Urethane
BONDED TO 3/4" PLYWOOD

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1-1/8" + Relief		

Call for ThermoSpec^{tm} Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available
ElastoSpec^{tm} Customized Panel Sizes and Art Panels

Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460

Spec Formliners, Inc.


Impressive on Concrete

Pattern Number: **1506**

Random Block Ashlar Stone

1-1/2" deep block Ashlar Stone , 4" to 42" stone, 1" deep by 1-1/2" wide mortar joint.



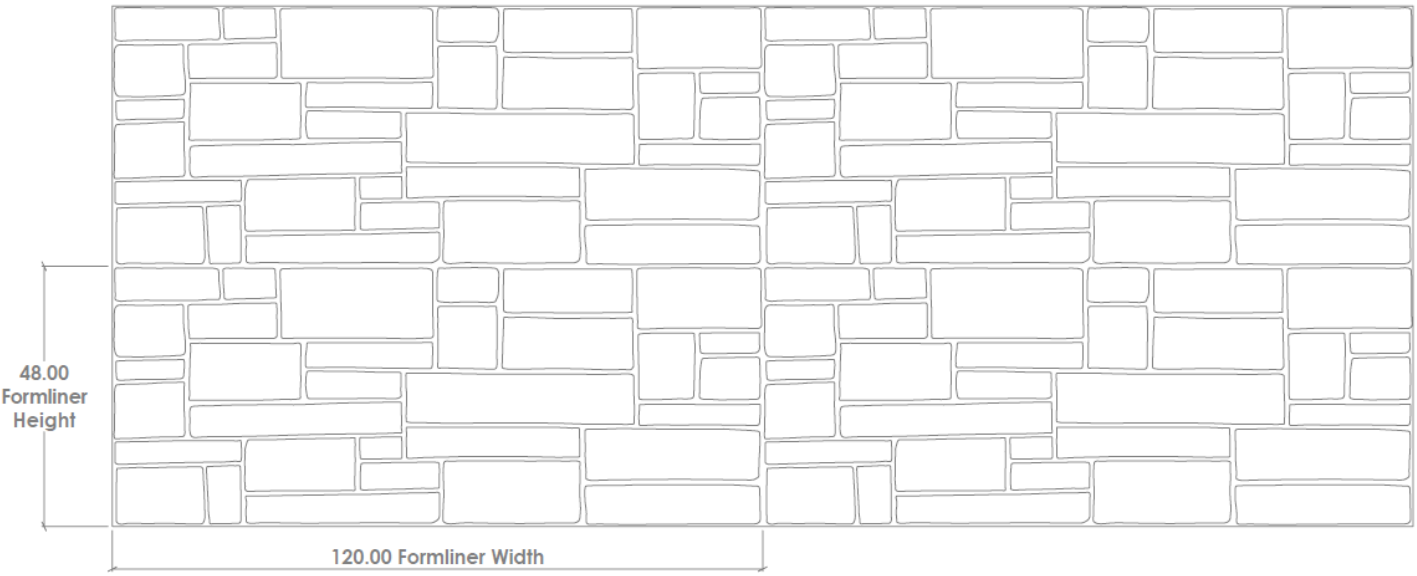

Note: Partial mortar joints around perimeter.


Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460

Spec Formliners, Inc.
Impressive on Concrete


Pattern Number: **1508**

Large Dry Stack Fieldstone

Rock sizes 3” to 24”
Maximum depth 1-1/4”

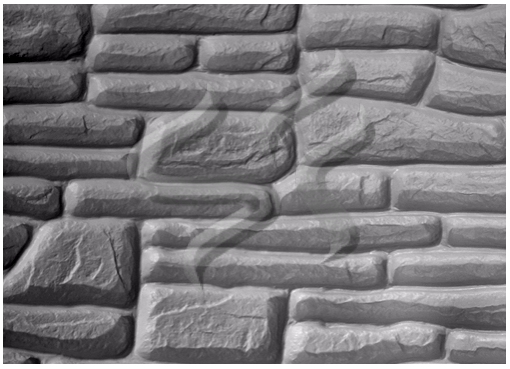

CONCRETE

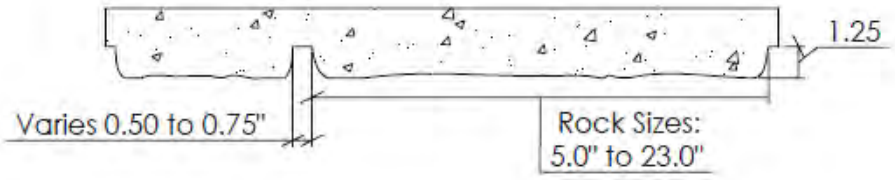

Visit **www.specformliners.com** for application guides and technical information

ThermoSpec^{tm}
SINGLE OR MULTI-USE PLASTIC

Property	HIPS	ABS
Tensile D638	3700	5300
IFlexural D7905	-	9300
Hardness D786	-	105
Material Weights - lbs/ft^2		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843
Thicknesses Available		
0.070, 0.090, 0.110, 0.145, 0.155, 0.180		

ElastoSpec Lite^{tm} Semi-Elastomeric
MULTI-USE MATERIAL

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1/4" + Relief		

ElastoSpec^{tm} 100% Solid Urethane
BONDED TO 3/4” PLYWOOD

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1-1/8" + Relief		

Call for ThermoSpec^{tm} Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available
ElastoSpec^{tm} Customized Panel Sizes and Art Panels

Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460


Spec Formliners, Inc.


Impressive on Concrete

Pattern Number: **1508**

Large Dry Stack Fieldstone

Rock sizes 3" to 24"
Maximum depth 1-1/4"

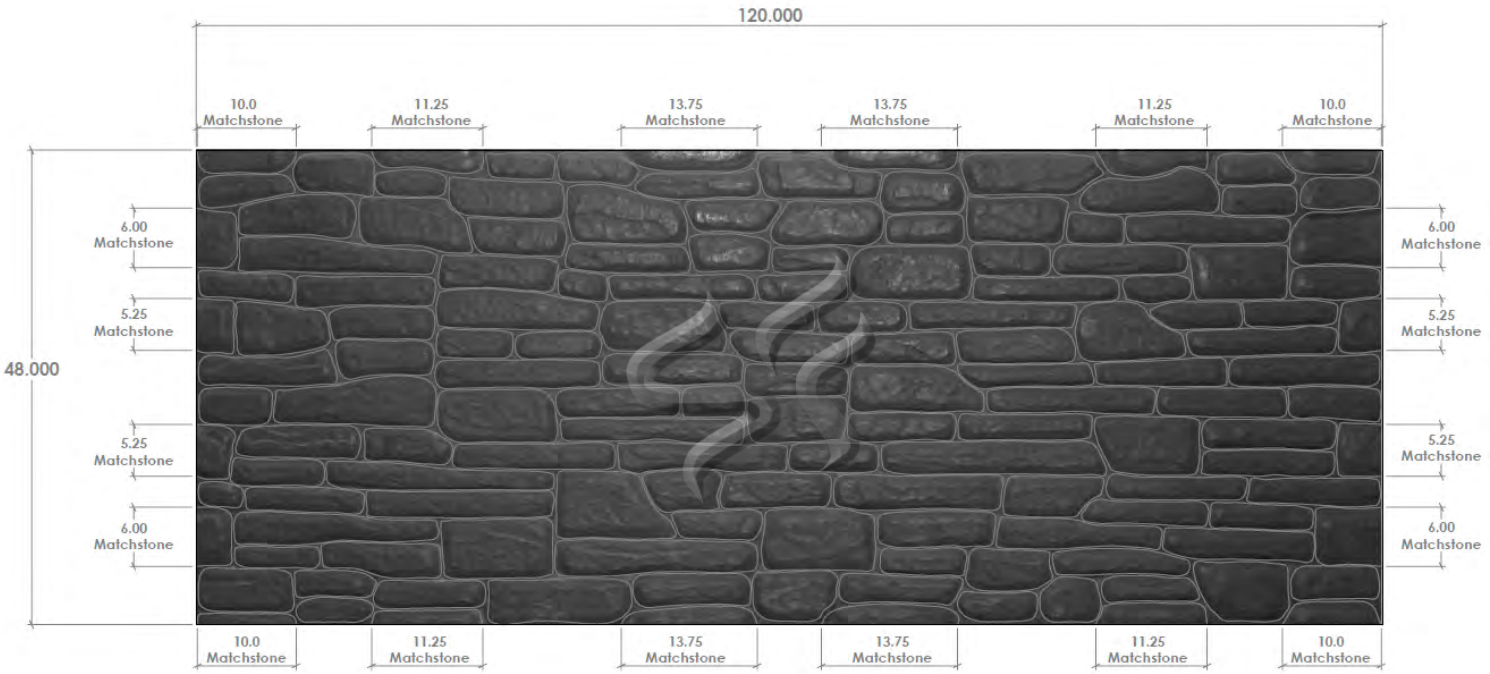

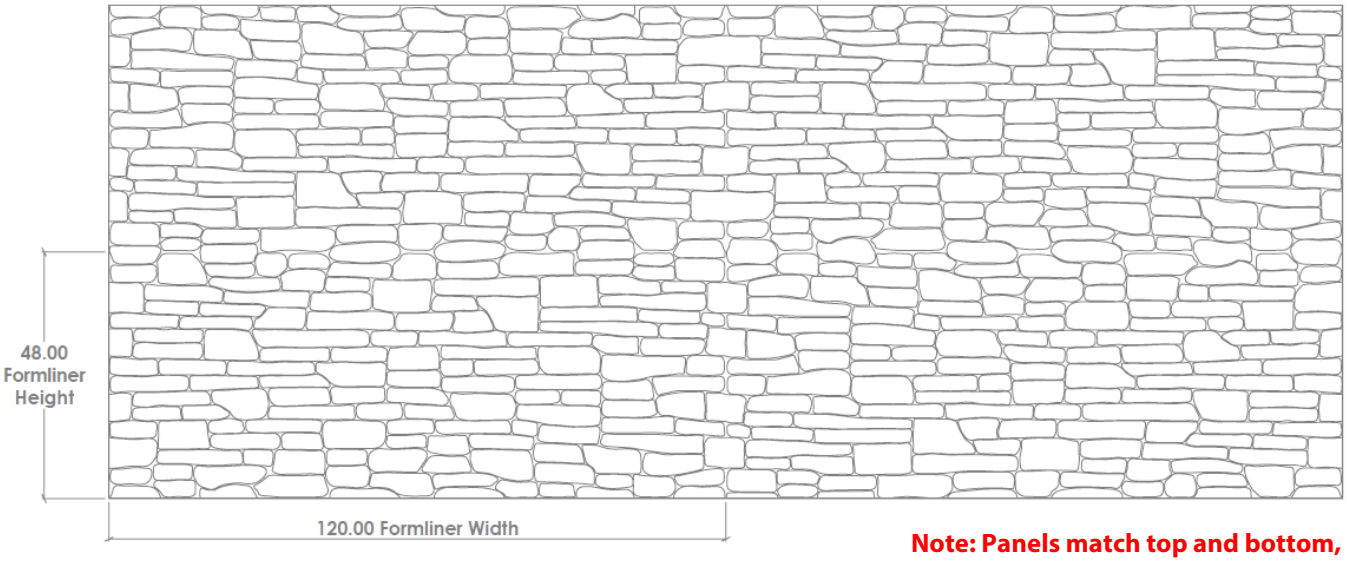

Note: Panels match top and bottom, side to side and rotated180°.

Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460

Spec Formliners, Inc.
Impressive on Concrete


Pattern Number: **1510**

Rocky Mountain Flagstone

Rock sizes - 4" to 40" - 2" maximum depth - 3/4" to 1" mortar joint



CONCRETE

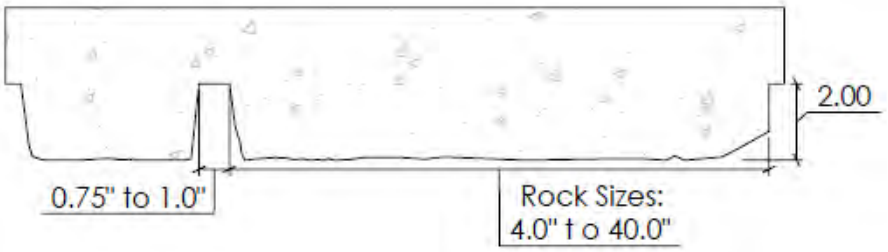

Visit **www.specformliners.com** for application guides and technical information

ThermoSpec[tm]
SINGLE OR MULTI-USE PLASTIC

Property	HIPS	ABS
Tensile D638	3700	5300
IFlexural D7905	-	9300
Hardness D786	-	105
Material Weights - lbs/ft^2		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843
Thicknesses Available		
0.070, 0.090, 0.110, 0.145, 0.155, 0.180		

ElastoSpec Lite[tm] Semi-Elastomeric
MULTI-USE MATERIAL

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1/4" + Relief		

ElastoSpec[tm] 100% Solid Urethane
BONDED TO 3/4" PLYWOOD

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1-1/8" + Relief		

Call for ThermoSpec[tm] Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available
ElastoSpec[tm] Customized Panel Sizes and Art Panels


Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460


Spec Formliners, Inc.
Impressive on Concrete

Pattern Number: **1510**

Rocky Mountain Flagstone

Rock sizes - 4" to 40" - 2" maximum depth - 3/4" to 1" mortar joint

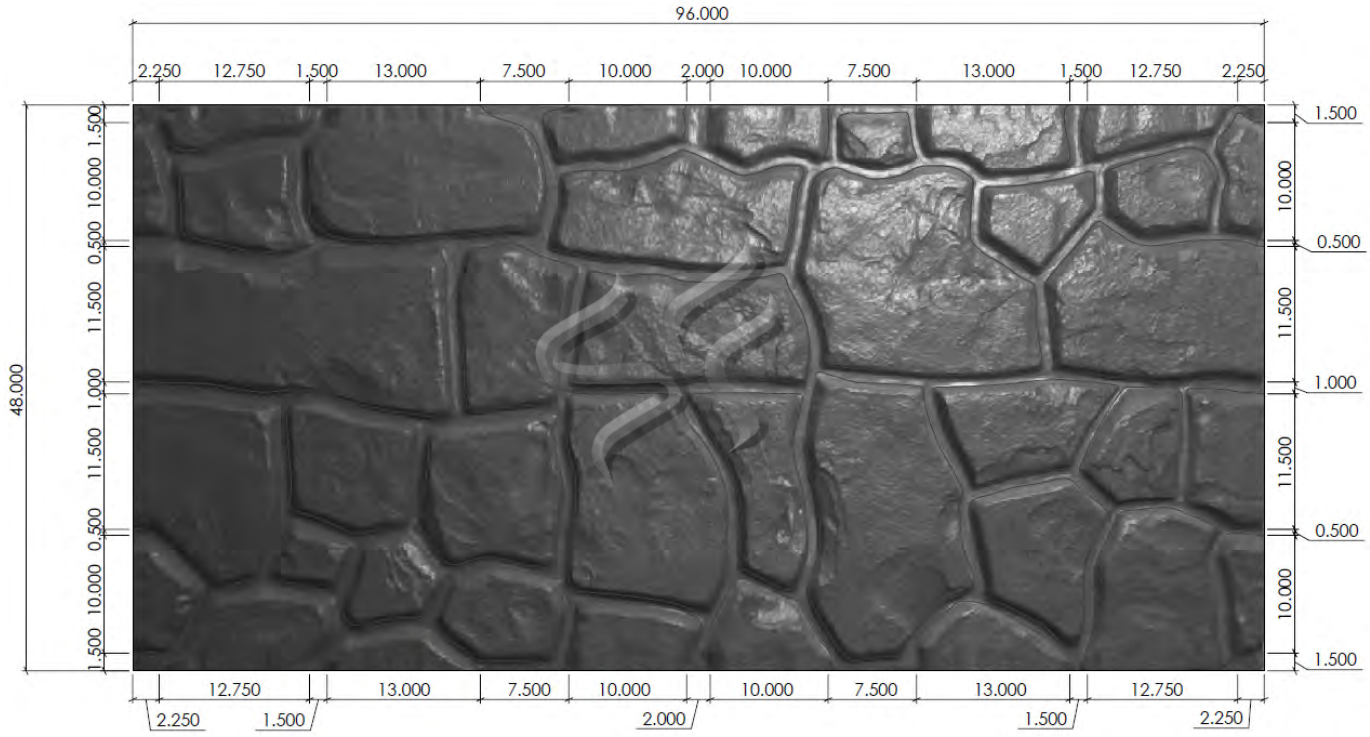

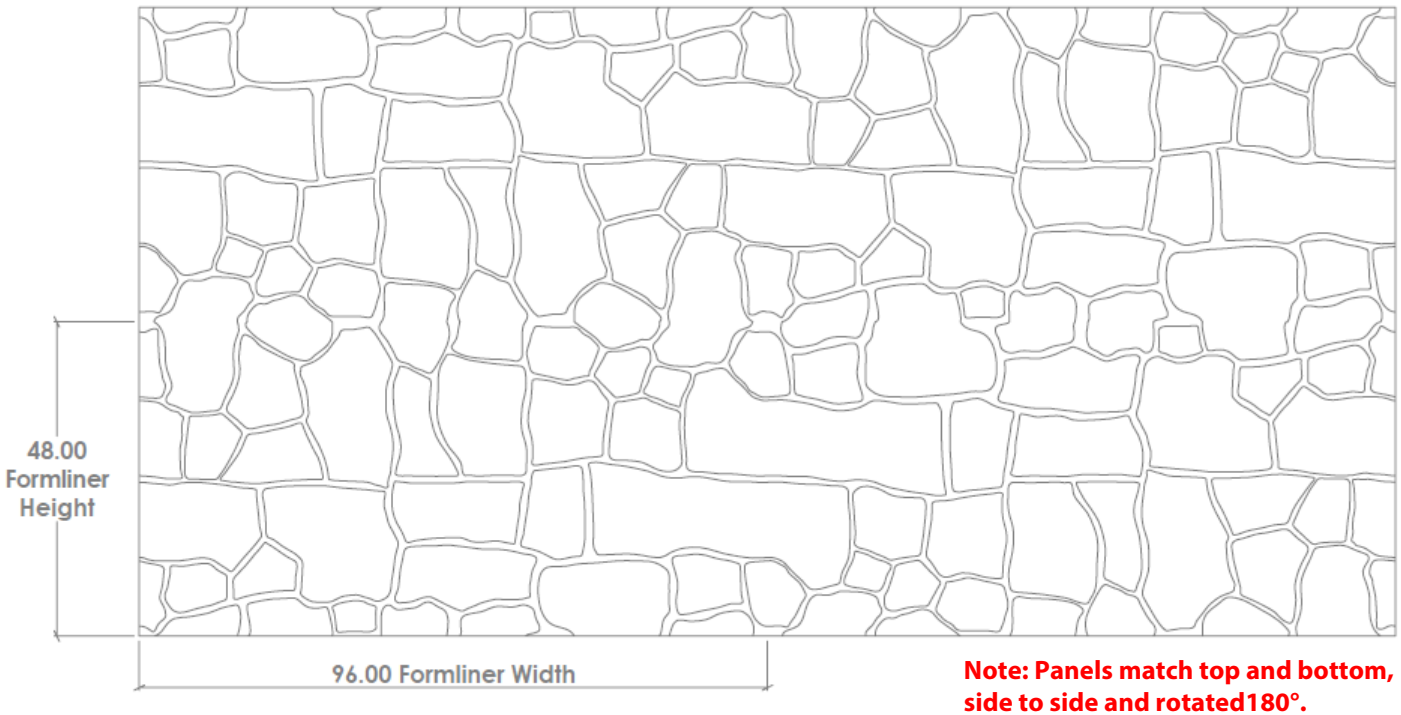

Note: Panels match top and bottom, side to side and rotated180°.


Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460


Spec Formliners, Inc.
Impressive on Concrete

Pattern Number: **1511**

Devils Slide Strata

Various layered rock strata from Devils Slide California - 3" maximum depth

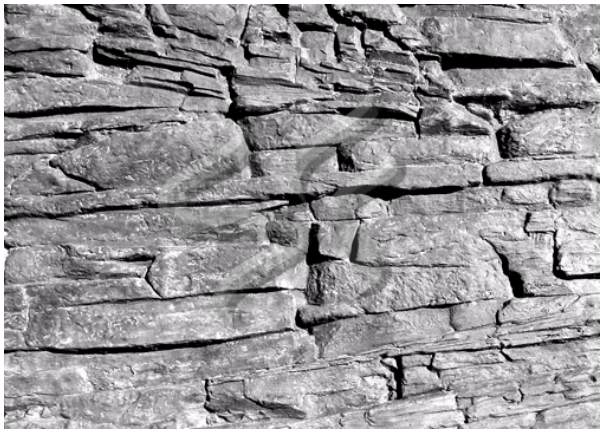

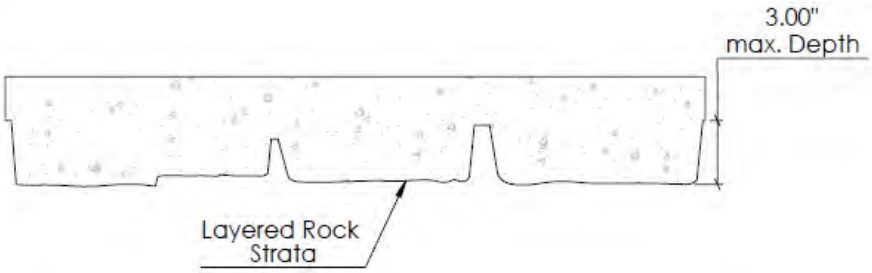

Visit **www.specformliners.com** for application guides and technical information

ThermoSpec^{tm}
SINGLE OR MULTI-USE PLASTIC

Property	HIPS	ABS
Tensile D638	3700	5300
IFlexural D7905	-	9300
Hardness D786	-	105
Material Weights - lbs/ft^2		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843
Thicknesses Available		
0.070, 0.090, 0.110, 0.145, 0.155, 0.180		

ElastoSpec Lite^{tm} Semi-Elastomeric
MULTI-USE MATERIAL

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1/4" + Relief		

ElastoSpec^{tm} 100% Solid Urethane
BONDED TO 3/4" PLYWOOD

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1-1/8" + Relief		

Call for ThermoSpec^{tm} Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available
ElastoSpec^{tm} Customized Panel Sizes and Art Panels

Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460


Spec Formliners, Inc.
Impressive on Concrete

Pattern Number: **1511**

Devils Slide Strata

Various layered rock strata from Devils Slide California - 3" maximum depth



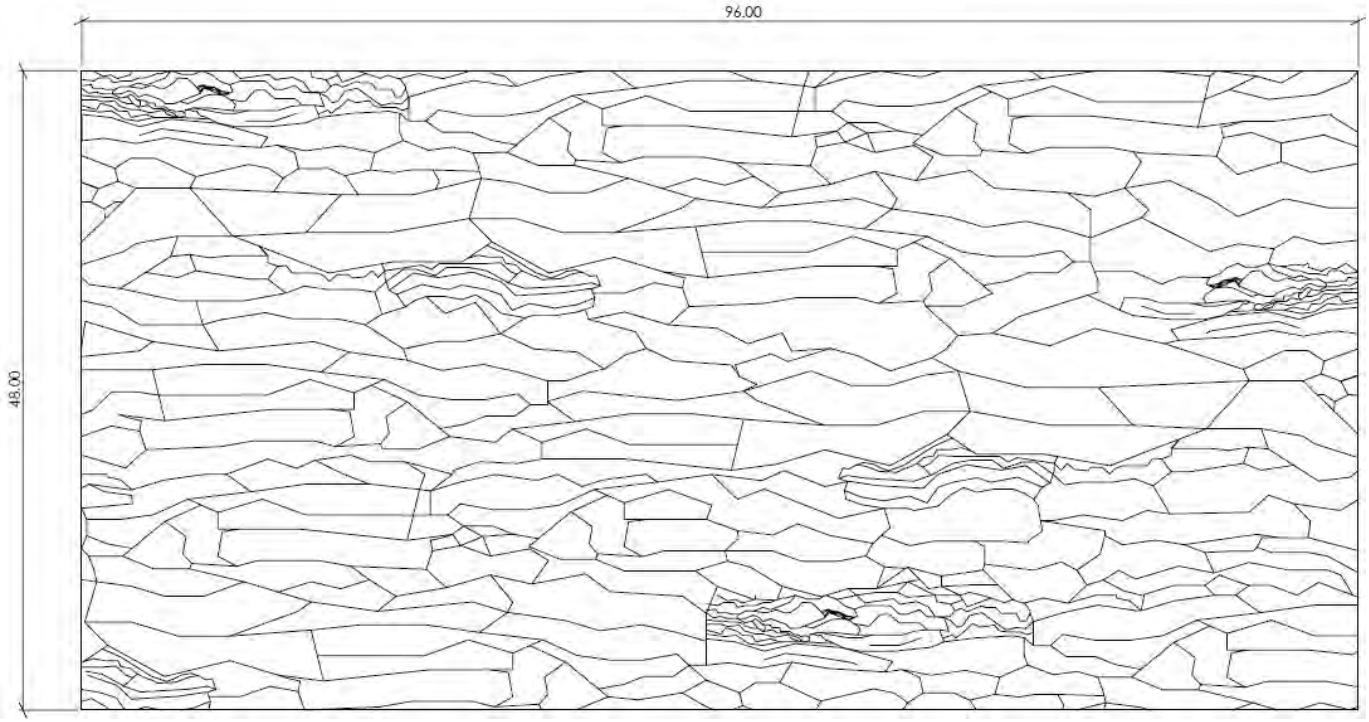


Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460

Spec Formliners, Inc.
Impressive on Concrete

Pattern Number: **1513**

SC Fractured Granite

3/4" to 1" (25mm) deep fractured granite texture.

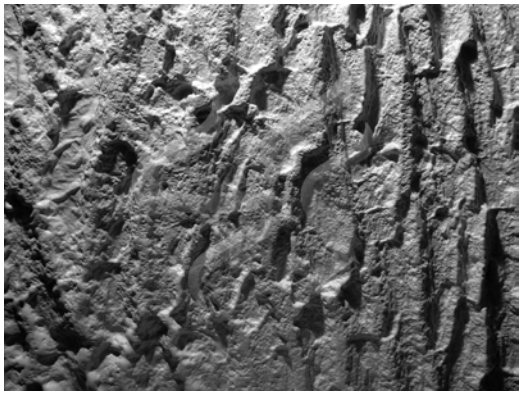

CONCRETE



Visit **www.specformliners.com** for application guides and technical information

ThermoSpec^{tm}
SINGLE OR MULTI-USE PLASTIC

Property	HIPS	ABS
Tensile D638	3700	5300
IFlexural D7905	-	9300
Hardness D786	-	105
Material Weights - lbs/ft^2		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843
Thicknesses Available		
0.070, 0.090, 0.110, 0.145, 0.155, 0.180		

ElastoSpec Lite^{tm} Semi-Elastomeric
MULTI-USE MATERIAL

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1/4" + Relief		

ElastoSpec^{tm} 100% Solid Urethane
BONDED TO 3/4" PLYWOOD

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1-1/8" + Relief		

Call for ThermoSpec^{tm} Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available
ElastoSpec^{tm} Customized Panel Sizes and Art Panels

Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460

Spec Formliners, Inc.


Impressive on Concrete

Pattern Number: **1513**

SC Fractured Granite

3/4" to 1" (25mm) deep fractured granite texture.



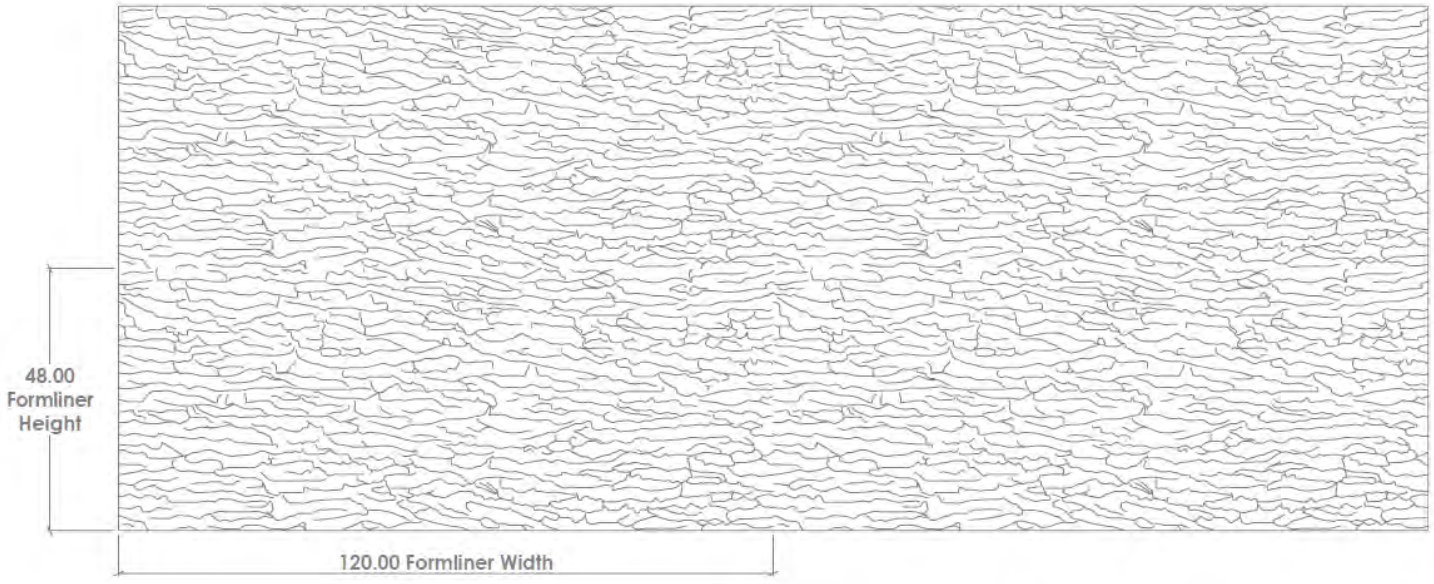


Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460


Spec Formliners, Inc.
Impressive on Concrete

Pattern Number: **1515**

SC Ashlar

Cut Ashlar stone 1-1/2" depth 3/4" mortar joint. Large stones in random pattern.

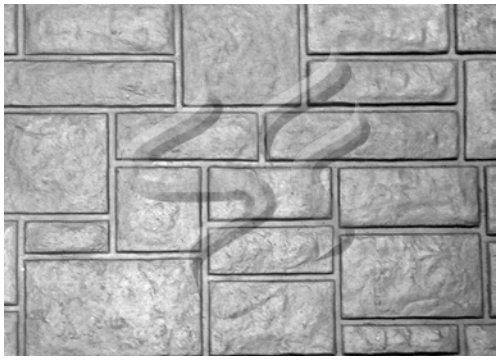

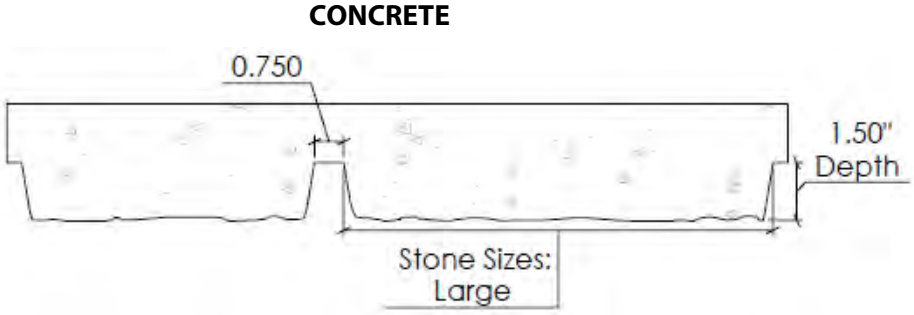

Visit **www.specformliners.com** for application guides and technical information

ThermoSpec^{tm}
Single or Multi-use Plastic

Property	HIPS	ABS
Tensile D638	3700	5300
IFlexural D7905	-	9300
Hardness D786	-	105
Material Weights - lbs/ft^2		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843
Thicknesses Available		
0.070, 0.090, 0.110, 0.145, 0.155, 0.180		

ElastoSpec Lite^{tm} Semi-Elastomeric
Multi-Use Material

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1/4" + Relief		

ElastoSpec^{tm} 100% Solid Urethane
Bonded To 3/4" Plywood

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1-1/8" + Relief		

Call for ThermoSpec^{tm} Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available
ElastoSpec^{tm} Customized Panel Sizes and Art Panels

Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460


Spec Formliners, Inc.


Impressive on Concrete

Pattern Number: **1515**

SC Ashlar

Cut Ashlar stone 1-1/2" depth 3/4" mortar joint. Large stones in random pattern.

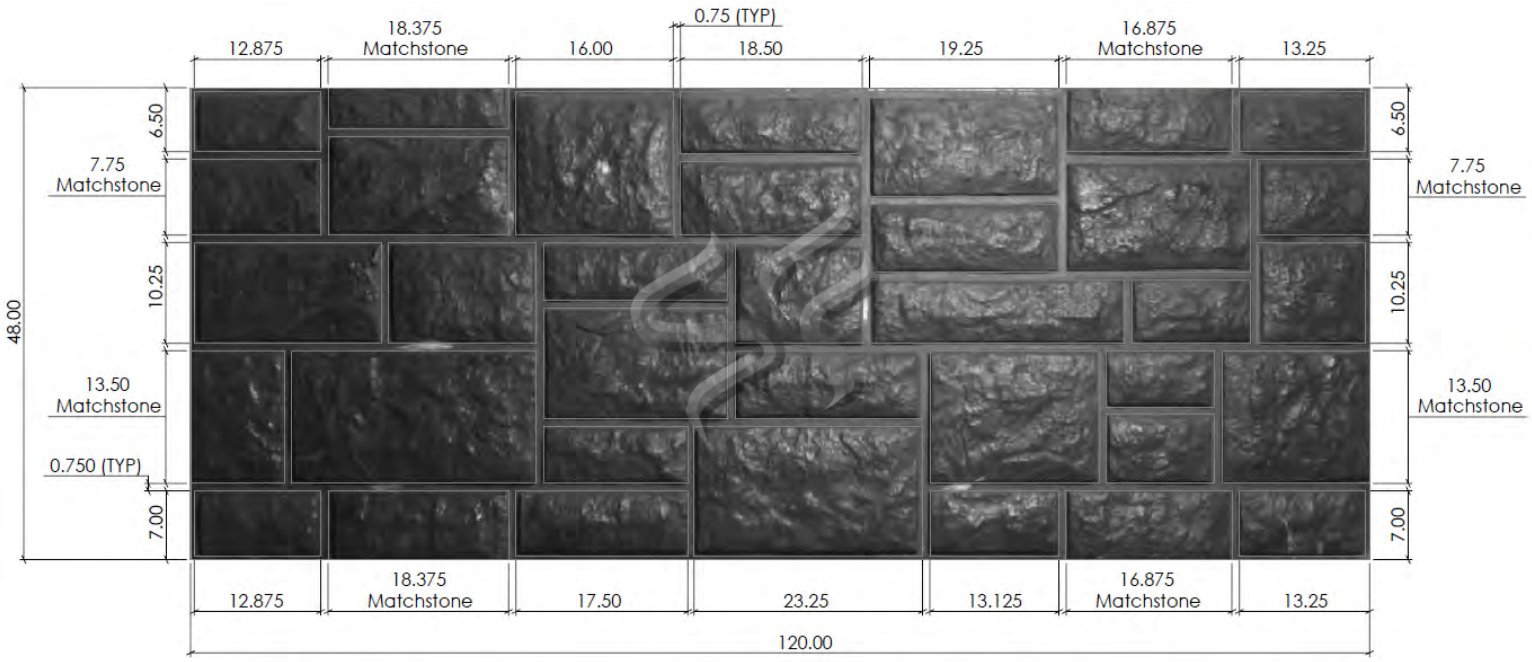

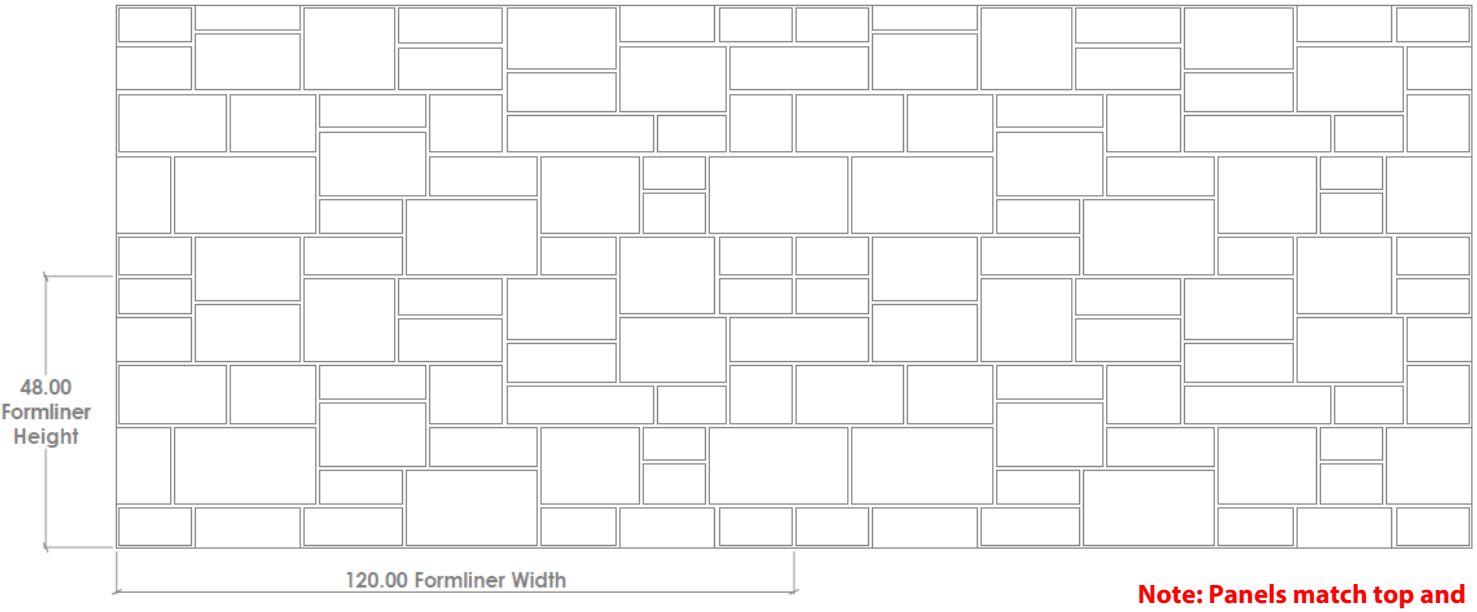

Note: Panels match top and bottom and side to side.

Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460


Spec Formliners, Inc.
Impressive on Concrete

Pattern Number: **1517**

St. Marys Ashlar

Aged cut stone sizes 4” to 19”
1-1/2” depth
1/2" - 1" mortar joints



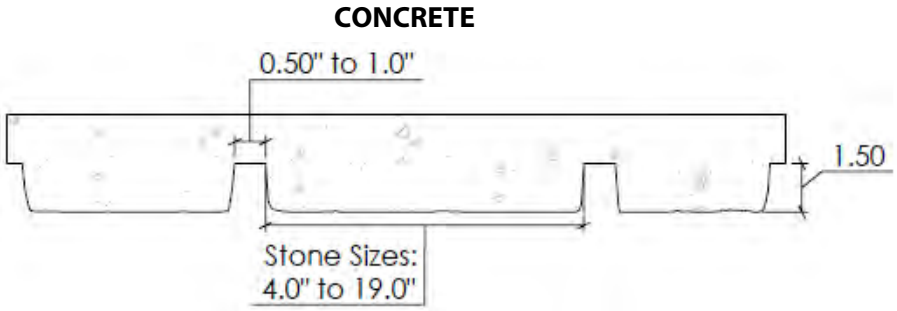

Visit **www.specformliners.com** for application guides and technical information

ThermoSpec^{tm}
SINGLE OR MULTI-USE PLASTIC

Property	HIPS	ABS
Tensile D638	3700	5300
IFlexural D7905	-	9300
Hardness D786	-	105
Material Weights - lbs/ft^2		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843
Thicknesses Available		
0.070, 0.090, 0.110, 0.145, 0.155, 0.180		

ElastoSpec Lite^{tm} Semi-Elastomeric
MULTI-USE MATERIAL

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1/4" + Relief		

ElastoSpec^{tm} 100% Solid Urethane
BONDED TO 3/4” PLYWOOD

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1-1/8" + Relief		

Call for ThermoSpec^{tm} Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available
ElastoSpec^{tm} Customized Panel Sizes and Art Panels


Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460

Spec Formliners, Inc.
Impressive on Concrete


Pattern Number: **1517**

St. Marys Ashlar

Aged cut stone sizes 4” to 19”
1-1/2” depth
1/2" - 1" mortar joints

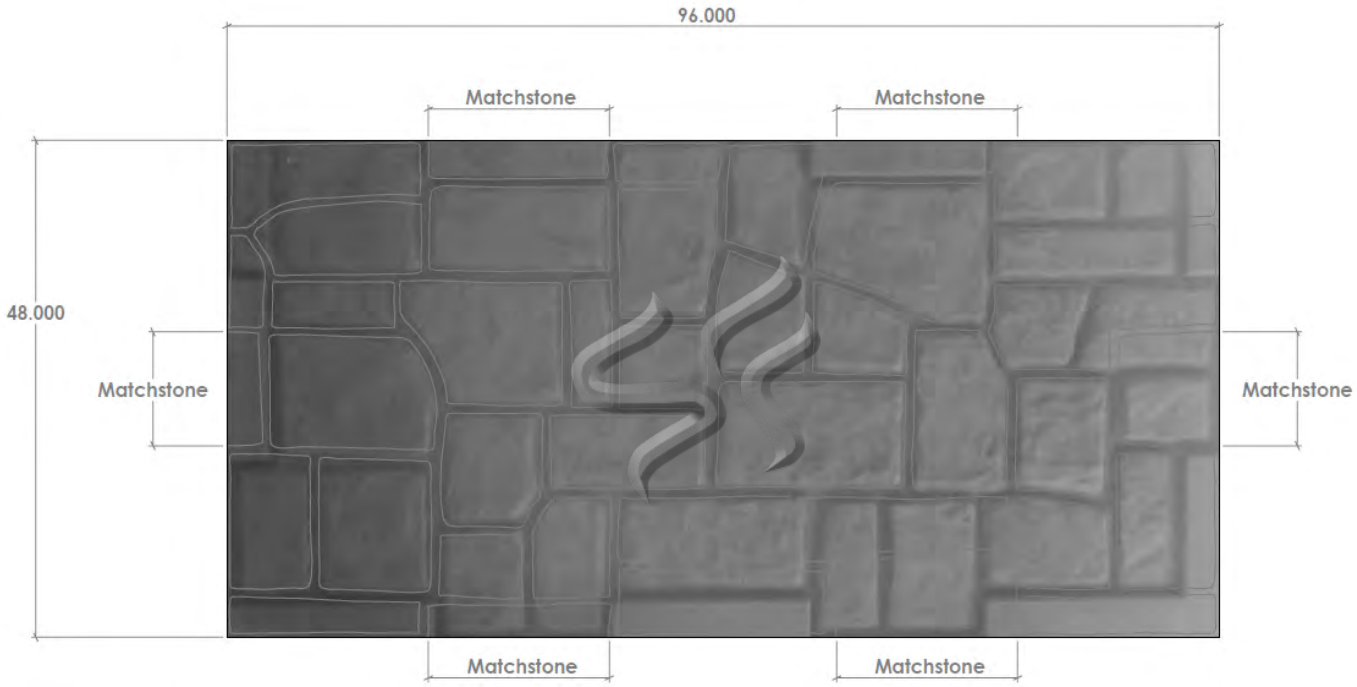

Panels are available in 4'x8'.
***Actual Stone Layout may differ from drawing.**

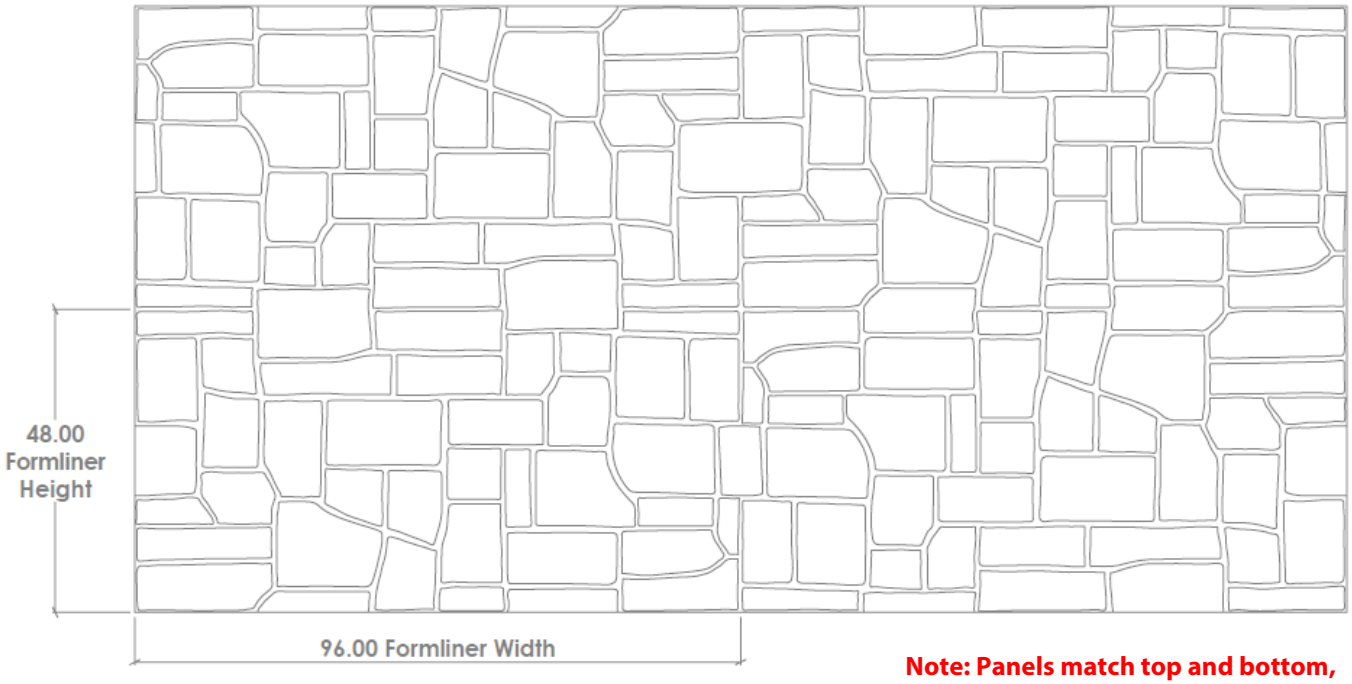

Note: Panels match top and bottom, side to side and rotated180°.

Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460

Spec Formliners, Inc.
Impressive on Concrete


Pattern Number: **1519**

Tallahassee Ashlar

Cut Ashlar stone 1" depth 3/4" mortar joint.
3” to 15” high by 7” to 28” wide stones



CONCRETE

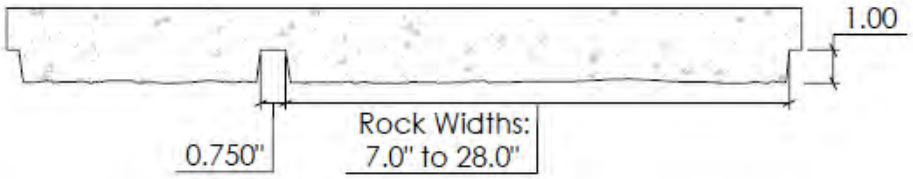

Visit **www.specformliners.com** for application guides and technical information

ThermoSpec^{tm}
SINGLE OR MULTI-USE PLASTIC

Property	HIPS	ABS
Tensile D638	3700	5300
IFlexural D7905	-	9300
Hardness D786	-	105
Material Weights - lbs/ft^2		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843
Thicknesses Available		
0.070, 0.090, 0.110, 0.145, 0.155, 0.180		

ElastoSpec Lite^{tm} Semi-Elastomeric
MULTI-USE MATERIAL

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1/4" + Relief		

ElastoSpec^{tm} 100% Solid Urethane
BONDED TO 3/4” PLYWOOD

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1-1/8" + Relief		

Call for ThermoSpec^{tm} Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available
ElastoSpec^{tm} Customized Panel Sizes and Art Panels


Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460


Spec Formliners, Inc.
Impressive on Concrete

Pattern Number: **1519**

Tallahassee Ashlar

Cut Ashlar stone 1" depth 3/4" mortar joint.
3” to 15” high by 7” to 28” wide stones

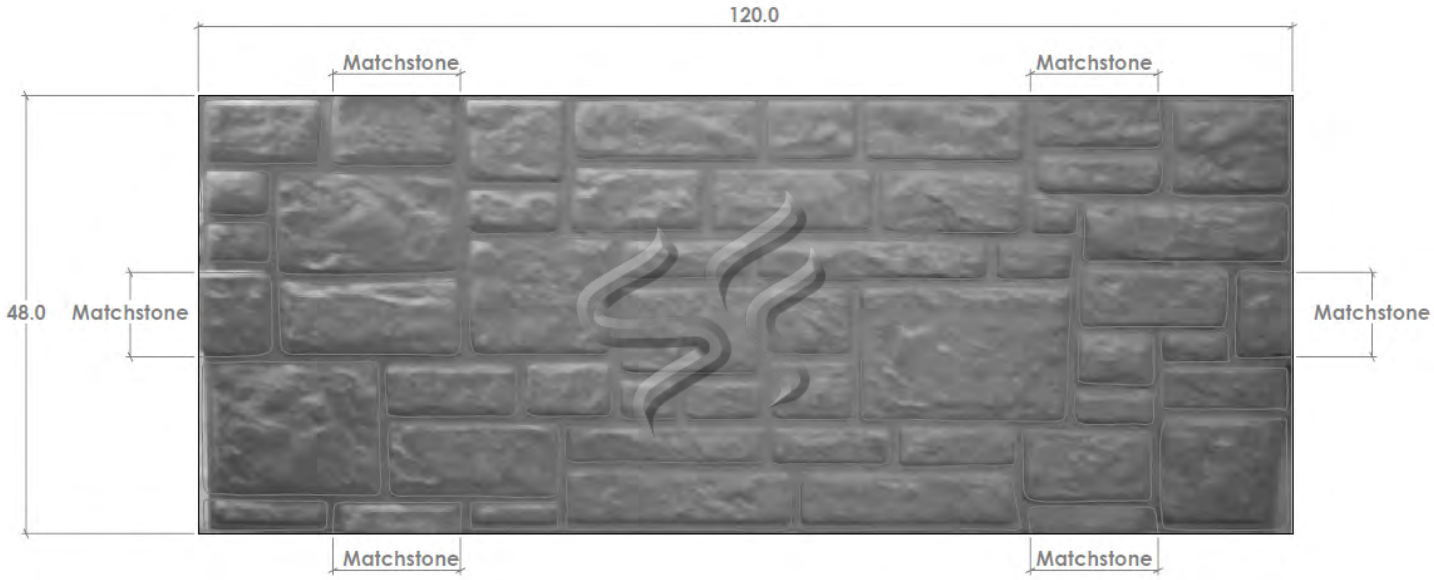

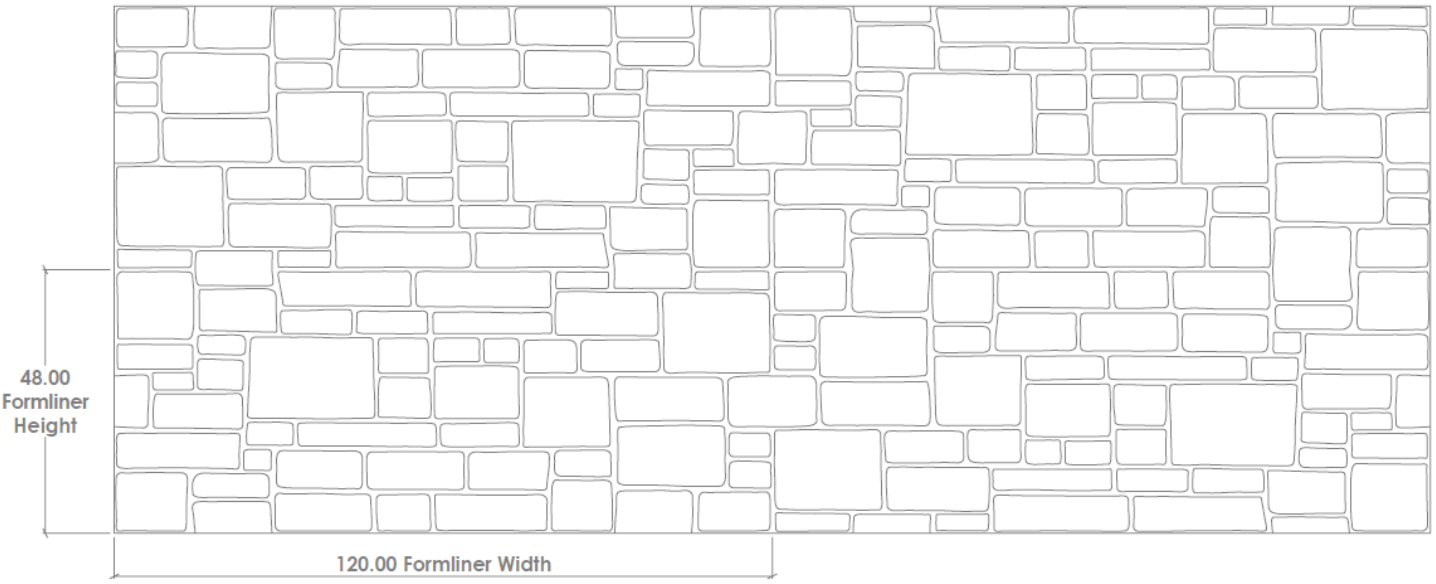

Note: Panels match top and bottom, side to side and rotated180°.


Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460

Spec Formliners, Inc.
Impressive on Concrete

Pattern Number: **1520**


Batavia Random Fieldstone

3” to 26 " fieldstone - 2-1/2" max depth 1/2” - 2" wide mortar joint

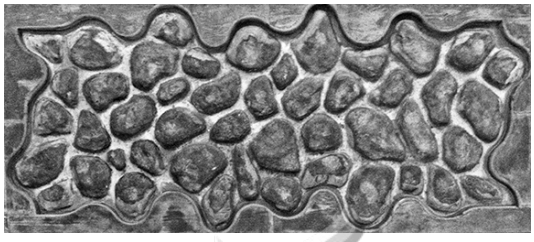



CONCRETE

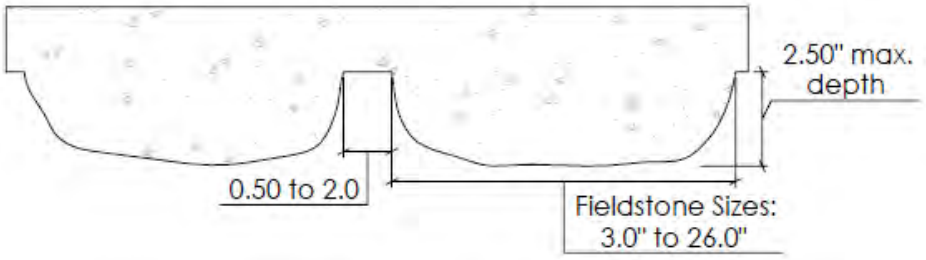

Note: Scroll edge in mortar joint matches top, bottom, and sides for hidden seams - 48" x 108" panels.

Visit **www.specformliners.com** for application guides and technical information

ThermoSpec^{tm}
SINGLE OR MULTI-USE PLASTIC

Property	HIPS	ABS
Tensile D638	3700	5300
IFlexural D7905	-	9300
Hardness D786	-	105
Material Weights - lbs/ft^2		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843
Thicknesses Available		
0.070, 0.090, 0.110, 0.145, 0.155, 0.180		

ElastoSpec Lite^{tm} Semi-Elastomeric
MULTI-USE MATERIAL

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1/4" + Relief		

ElastoSpec^{tm} 100% Solid Urethane
BONDED TO 3/4” PLYWOOD

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1-1/8" + Relief		

Call for ThermoSpec^{tm} Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available
ElastoSpec^{tm} Customized Panel Sizes and Art Panels

Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460


Spec Formliners, Inc.


Impressive on Concrete

Pattern Number: **1520**

Batavia Random Fieldstone

3” to 26 " fieldstone - 2-1/2" max depth 1/2” - 2" wide mortar joint

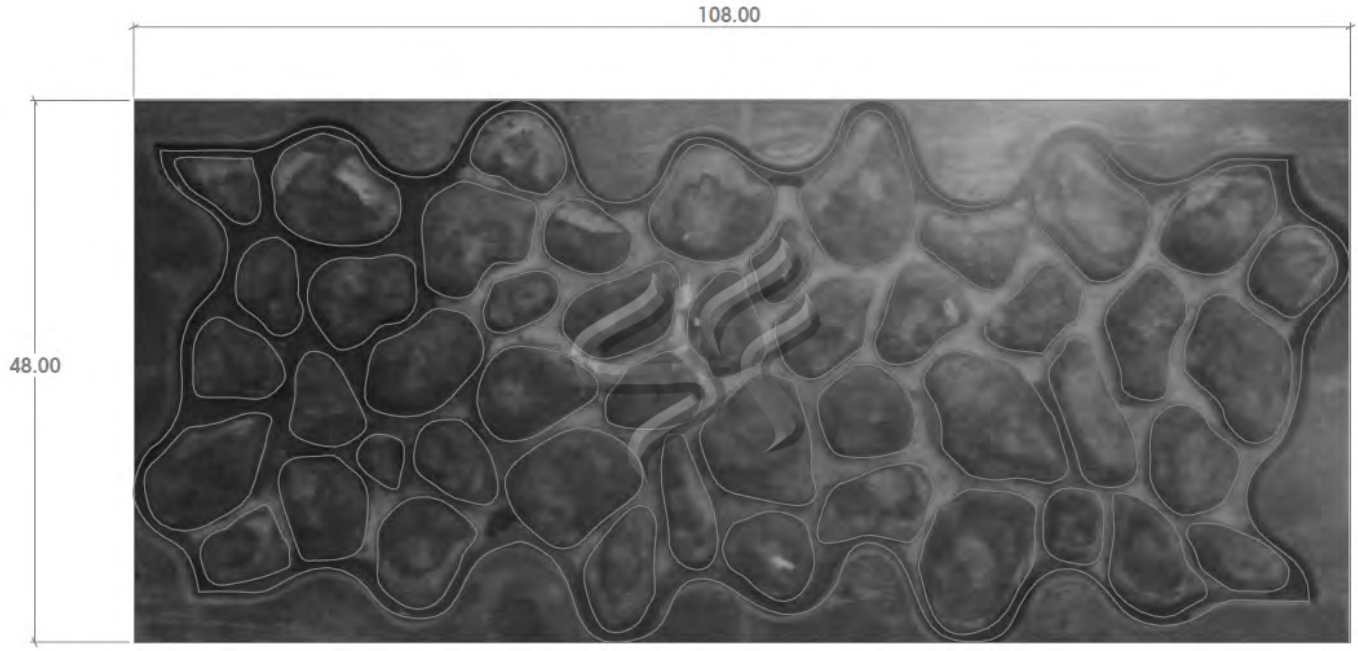

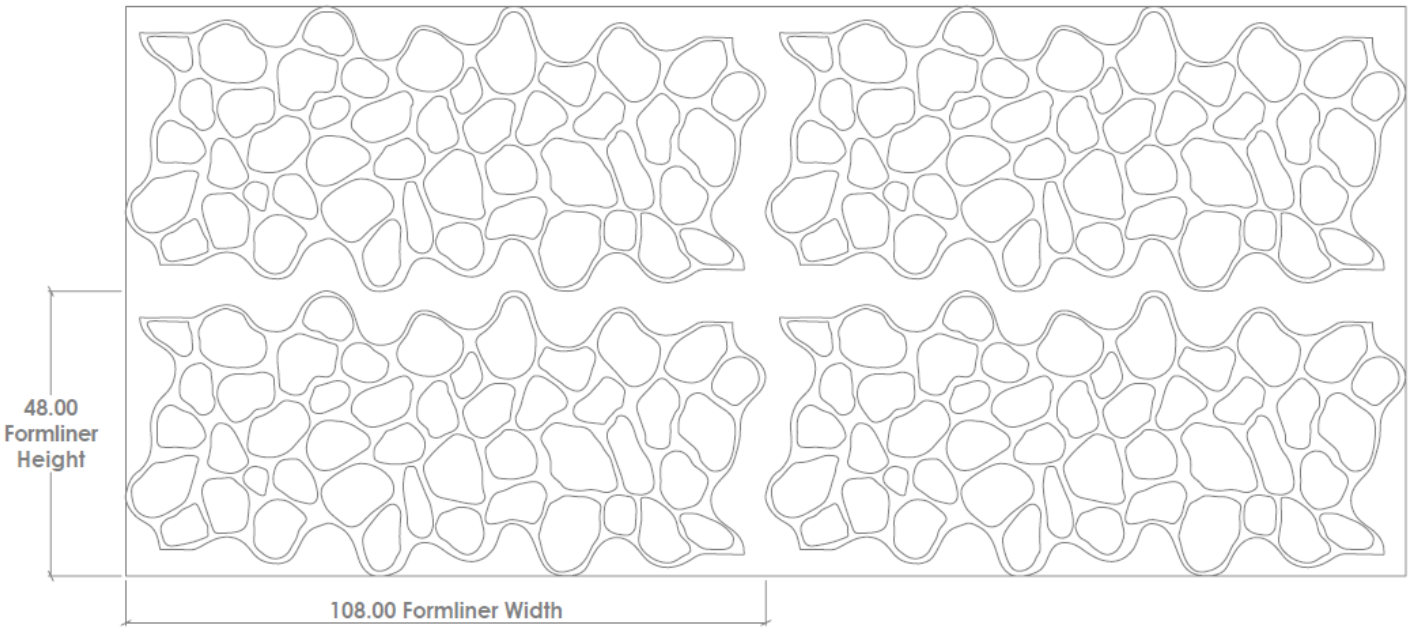

Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460


Spec Formliners, Inc.
Impressive on Concrete

Pattern Number: **1521**

Tahoka Stone

Random cut stone 4" to 34"
3/4" mortar joint - 1-1/2" depth



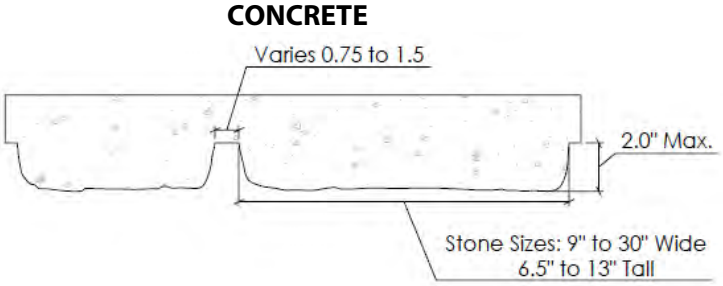

Urethane: Two matching panels with ends and sides texture matched. Panels can rotate, allowing random pattern layout.

Plastic: One panel with ends and sides texture matched.

Visit **www.specformliners.com** for application guides and technical information

ThermoSpec^{tm}
SINGLE OR MULTI-USE PLASTIC

Property	HIPS	ABS
Tensile D638	3700	5300
IFlexural D7905	-	9300
Hardness D786	-	105
Material Weights - lbs/ft^2		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843
Thicknesses Available		
0.070, 0.090, 0.110, 0.145, 0.155, 0.180		

ElastoSpec Lite^{tm} Semi-Elastomeric
MULTI-USE MATERIAL

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1/4" + Relief		

ElastoSpec^{tm} 100% Solid Urethane
BONDED TO 3/4" PLYWOOD

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1-1/8" + Relief		

Call for ThermoSpec^{tm} Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available
ElastoSpec^{tm} Customized Panel Sizes and Art Panels


Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460


Spec Formliners, Inc.
Impressive on Concrete

Pattern Number: **1521**

Tahoka Stone

Random cut stone 4" to 34"
3/4" mortar joint - 1-1/2" depth

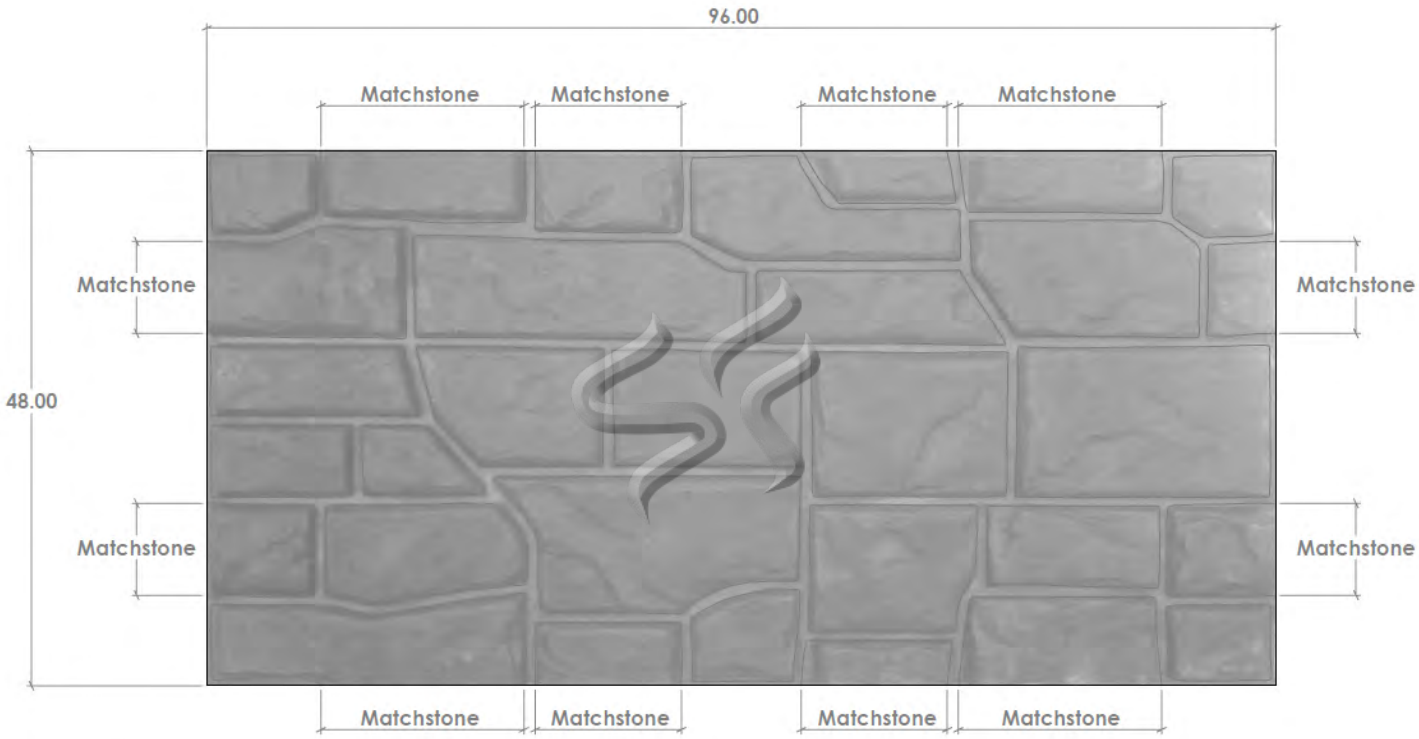

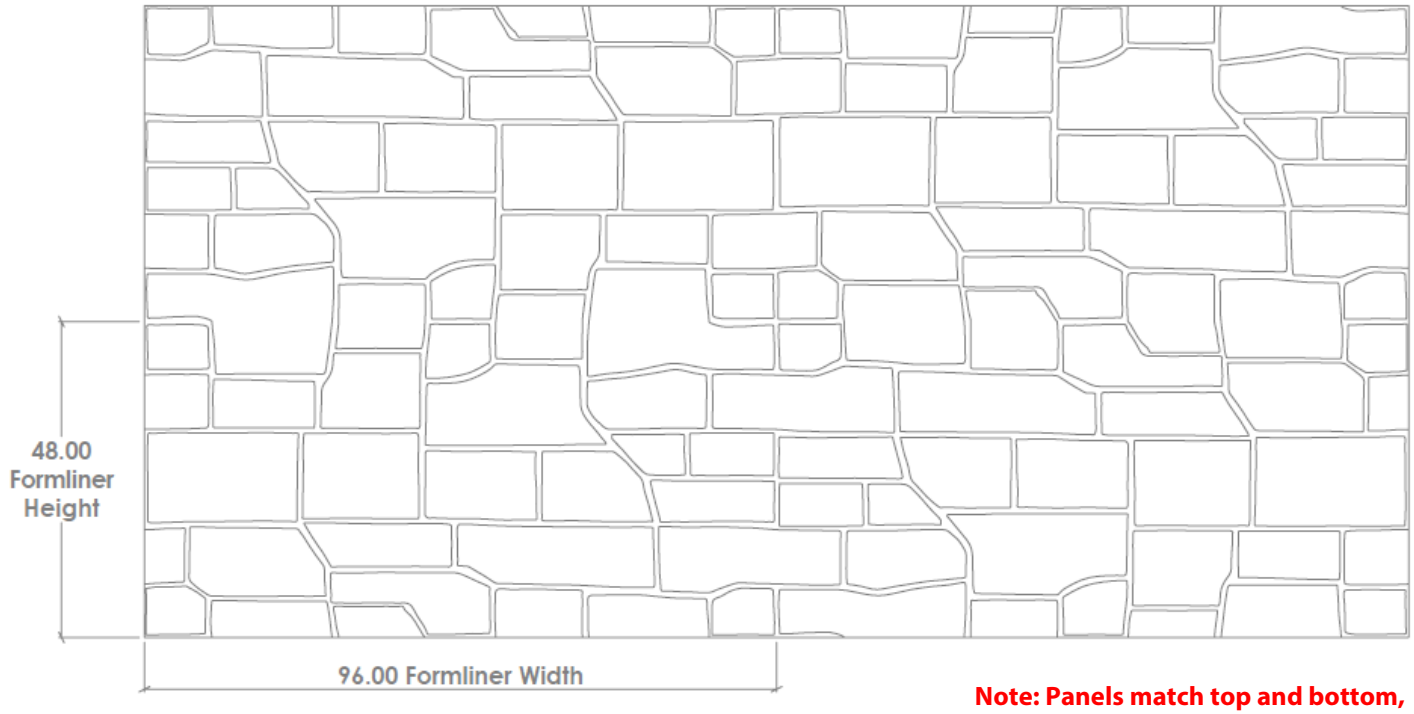

Note: Panels match top and bottom, side to side and rotated180°.


Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460

Spec Formliners, Inc.
Impressive on Concrete


Pattern Number: **1523**

RE Ashlar

1-1/2" maximum depth
Medium to large cut ashlar stone

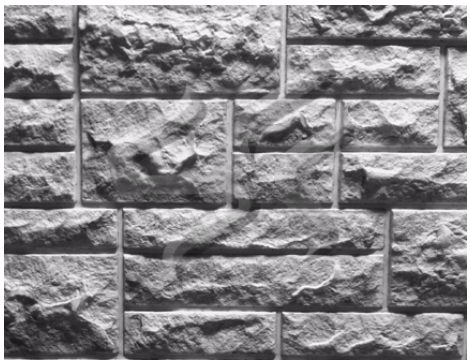

CONCRETE

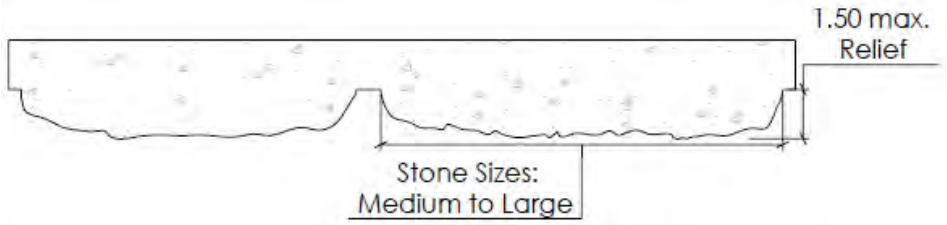

Visit **www.specformliners.com** for application guides and technical information

ThermoSpec^{tm}
SINGLE OR MULTI-USE PLASTIC

Property	HIPS	ABS
Tensile D638	3700	5300
IFlexural D7905	-	9300
Hardness D786	-	105
Material Weights - lbs/ft^2		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843
Thicknesses Available		
0.070, 0.090, 0.110, 0.145, 0.155, 0.180		

ElastoSpec Lite^{tm} Semi-Elastomeric
MULTI-USE MATERIAL

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1/4" + Relief		

ElastoSpec^{tm} 100% Solid Urethane
BONDED TO 3/4" PLYWOOD

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1-1/8" + Relief		

Call for ThermoSpec^{tm} Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available
ElastoSpec^{tm} Customized Panel Sizes and Art Panels

Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460


Spec Formliners, Inc.
Impressive on Concrete

Pattern Number: **1523**

RE Ashlar

1-1/2" maximum depth
Medium to large cut ashlar stone



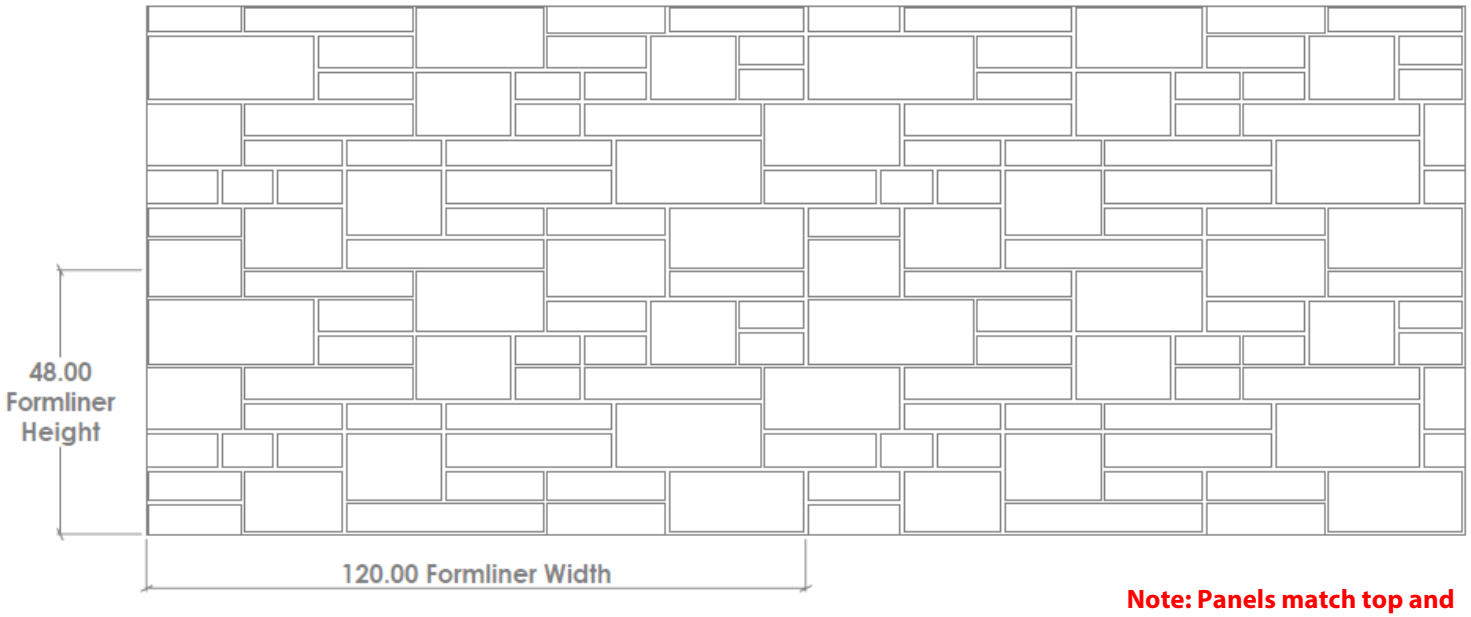

Note: Panels match top and bottom and side to side.


Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460

Spec Formliners, Inc.
Impressive on Concrete


Pattern Number: **1524**

San Diego Dry Stack

1" (25mm) maximum relief
1/2" to 9/16" mortar joint
7-1/2" to 28" max width rock
3" to 7-1/2" max height rock

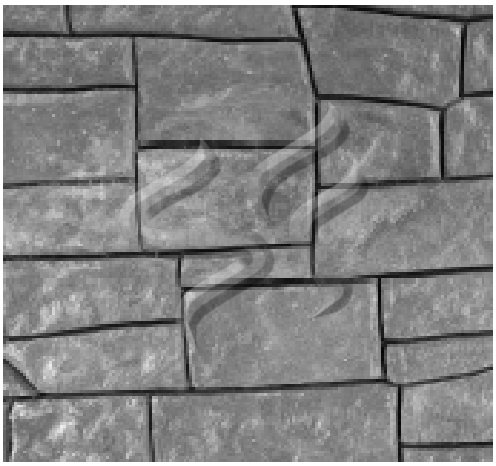

CONCRETE

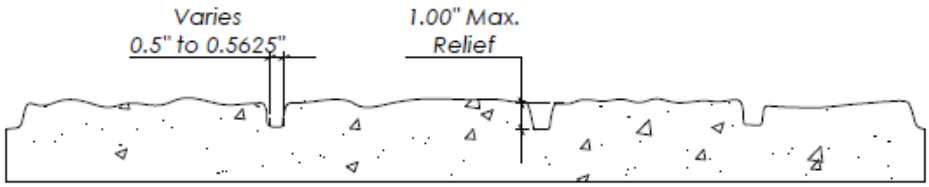

Visit **www.specformliners.com** for application guides and technical information

ThermoSpec[tm]
SINGLE OR MULTI-USE PLASTIC

Property	HIPS	ABS
Tensile D638	3700	5300
IFlexural D7905	-	9300
Hardness D786	-	105
Material Weights - lbs/ft²		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843
Thicknesses Available		
0.070, 0.090, 0.110, 0.145, 0.155, 0.180		

ElastoSpec Lite[tm] Semi-Elastomeric
MULTI-USE MATERIAL

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
Material Weights - lbs/ft²		
Varies by Pattern		
Maximum Thickness		
1/4" + Relief		

ElastoSpec[tm] 100% Solid Urethane
BONDED TO 3/4" PLYWOOD

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft²		
Varies by Pattern		
Maximum Thickness		
1-1/8" + Relief		

Call for ThermoSpec[tm] Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available
ElastoSpec[tm] Customized Panel Sizes and Art Panels

Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460

Spec Formliners, Inc.
Impressive on Concrete


Pattern Number: **1524**

San Diego Dry Stack

1” (25mm) maximum relief
1/2" to 9/16" mortar joint
7-1/2" to 28" max width rock
3" to 7-1/2" max height rock



Panels are available in 4'x12'.
***Actual Stone Layout may differ from drawing.**

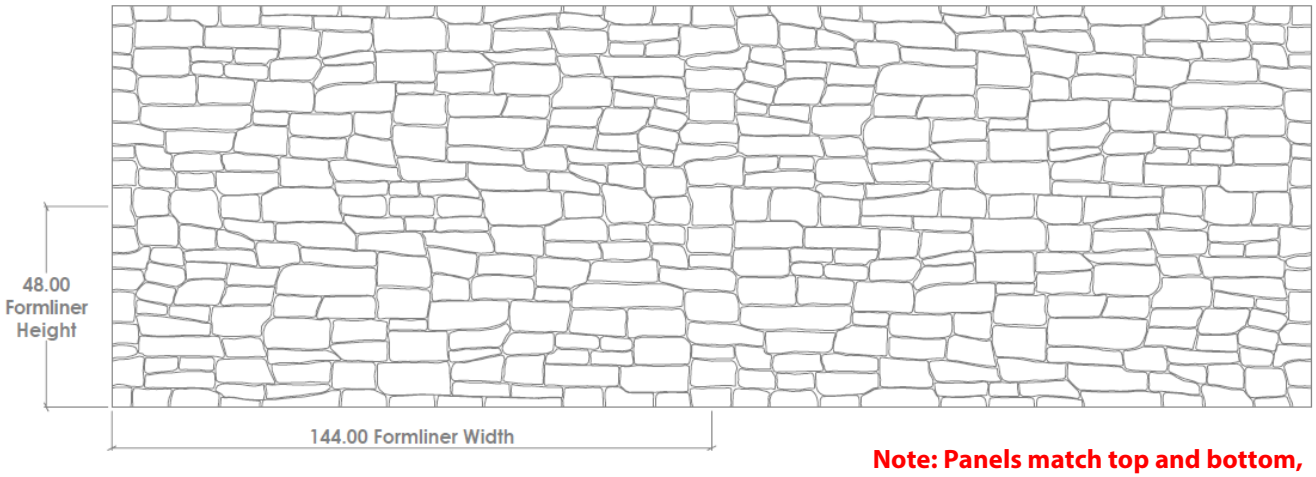

Note: Panels match top and bottom, side to side and rotated180°.


Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460

Spec Formliners, Inc.
Impressive on Concrete


Pattern Number: **1526**

La Sierra Fieldstone

2" max. relief
1/2" to 3/4" (13 to 19mm) mortar joint
6" - 29" width and 5" - 11" height stones

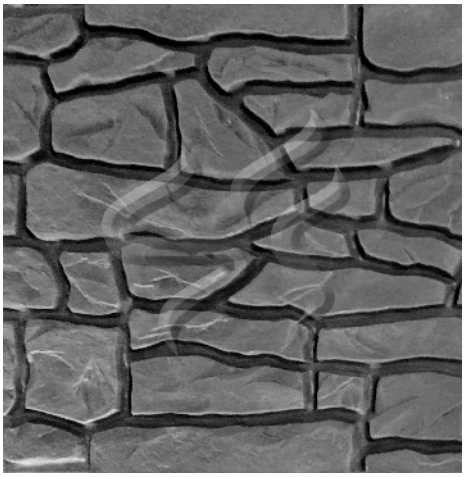

CONCRETE

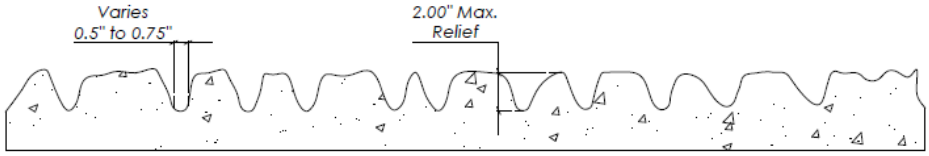

Visit **www.specformliners.com** for application guides and technical information

ThermoSpec^{tm}
SINGLE OR MULTI-USE PLASTIC

Property	HIPS	ABS
Tensile D638	3700	5300
IFlexural D7905	-	9300
Hardness D786	-	105
Material Weights - lbs/ft^2		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843
Thicknesses Available		
0.070, 0.090, 0.110, 0.145, 0.155, 0.180		

ElastoSpec Lite^{tm} Semi-Elastomeric
MULTI-USE MATERIAL

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1/4" + Relief		

ElastoSpec^{tm} 100% Solid Urethane
BONDED TO 3/4" PLYWOOD

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1-1/8" + Relief		

Call for ThermoSpec^{tm} Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available
ElastoSpec^{tm} Customized Panel Sizes and Art Panels


Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460

Spec Formliners, Inc.
Impressive on Concrete


Pattern Number: **1526**

La Sierra Fieldstone

2" max. relief
1/2" to 3/4" (13 to 19mm) mortar joint
6" - 29" width and 5" - 11" height stones

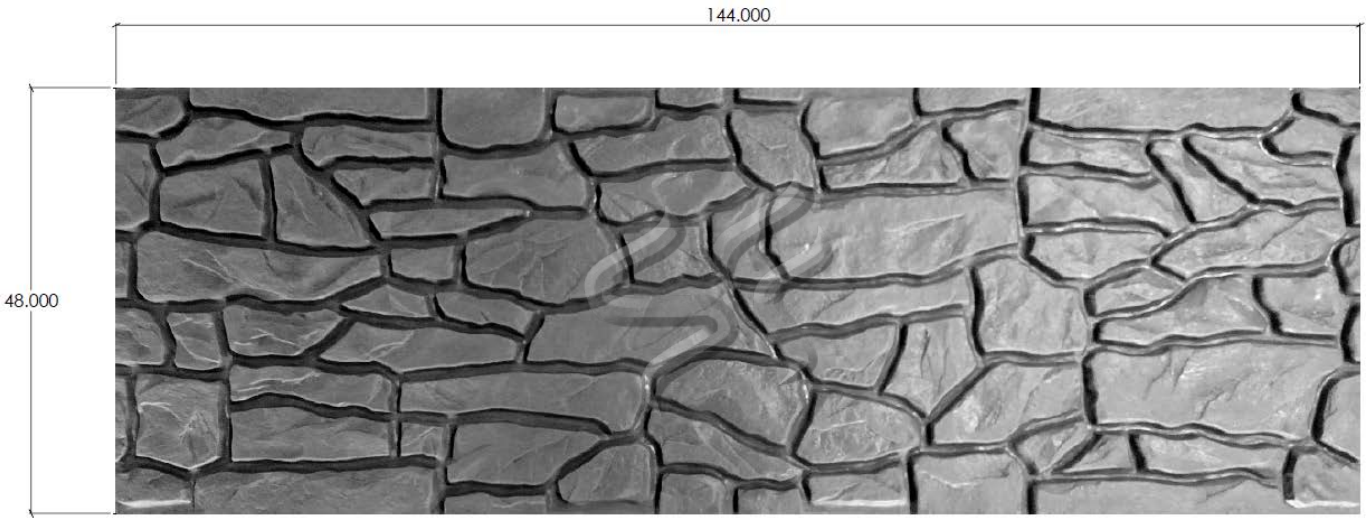

Panels are available in 4'x12'.
***Actual Stone Layout may differ from drawing.**

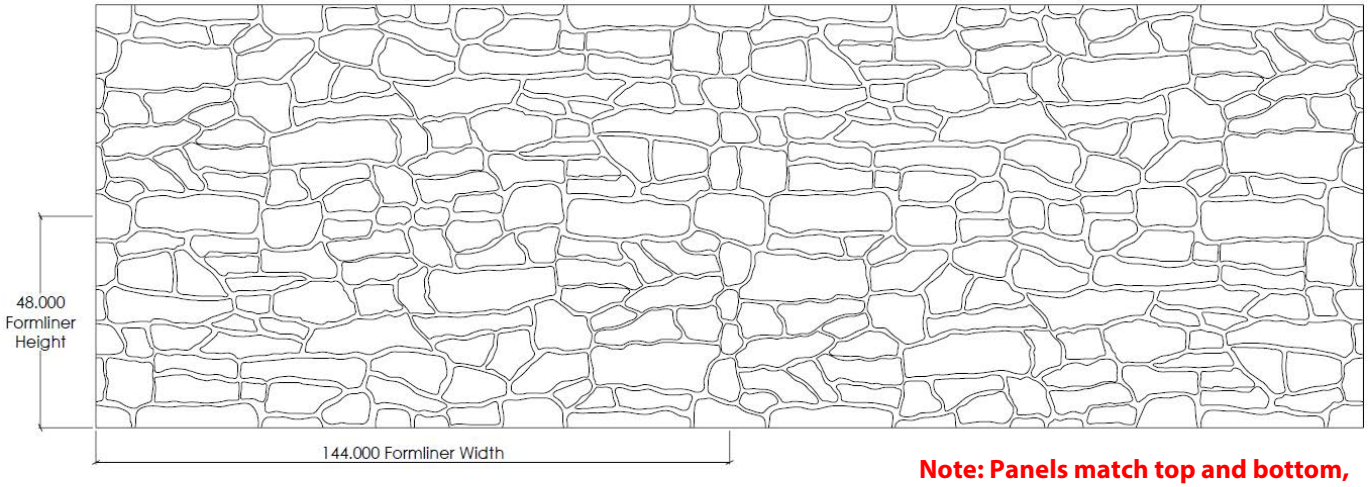

Note: Panels match top and bottom, side to side and rotated180°.


Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460

Spec Formliners, Inc.
Impressive on Concrete


Pattern Number: **1534**

Large Running Bond Stone

1-1/2"(38mm) maximum depth
7-1/4" x 22" maximum stone size

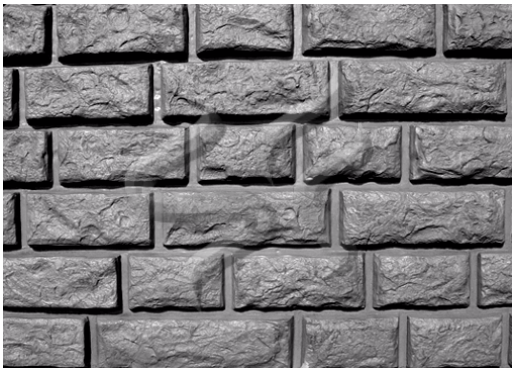

CONCRETE

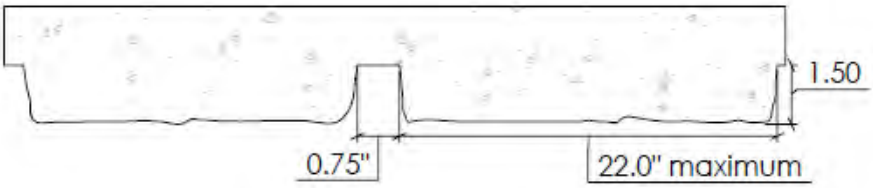

Visit **www.specformliners.com** for application guides and technical information

ThermoSpec[tm]
SINGLE OR MULTI-USE PLASTIC

Property	HIPS	ABS
Tensile D638	3700	5300
IFlexural D7905	-	9300
Hardness D786	-	105
Material Weights - lbs/ft²		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843
Thicknesses Available		
0.070, 0.090, 0.110, 0.145, 0.155, 0.180		

ElastoSpec Lite[tm] Semi-Elastomeric
MULTI-USE MATERIAL

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
Material Weights - lbs/ft²		
Varies by Pattern		
Maximum Thickness		
1/4" + Relief		

ElastoSpec[tm] 100% Solid Urethane
BONDED TO 3/4" PLYWOOD

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft²		
Varies by Pattern		
Maximum Thickness		
1-1/8" + Relief		

Call for ThermoSpec[tm] Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available
ElastoSpec[tm] Customized Panel Sizes and Art Panels

Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460


Spec Formliners, Inc.
Impressive on Concrete

Pattern Number: **1534**

Large Running Bond Stone

1-1/2”(38mm) maximum depth
7-1/4" x 22" maximum stone size



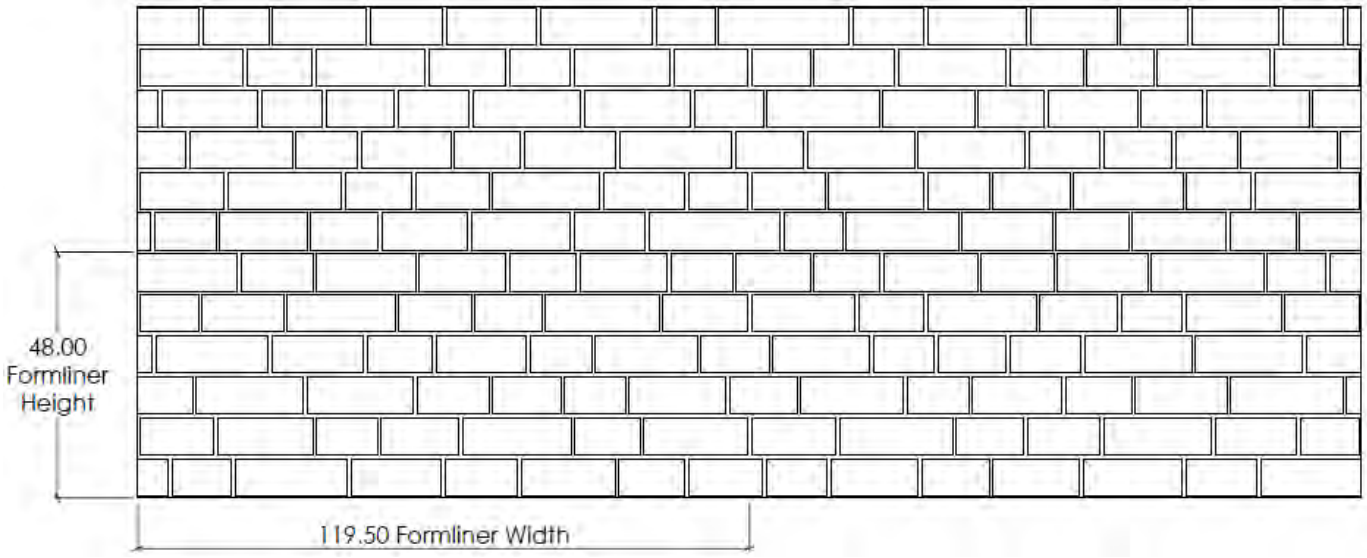

Note: Panels match top and bottom, side to side and rotated180°.


Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460

Spec Formliners, Inc.
Impressive on Concrete


Pattern Number: **1535**

Amboy Cut Stone

2" (50mm) maximum depth
Panel size 24" x 96", various stone layouts for random placement

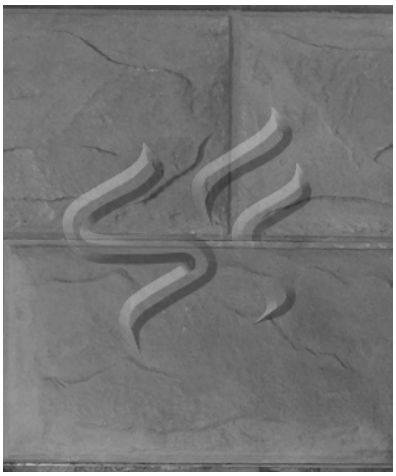

CONCRETE

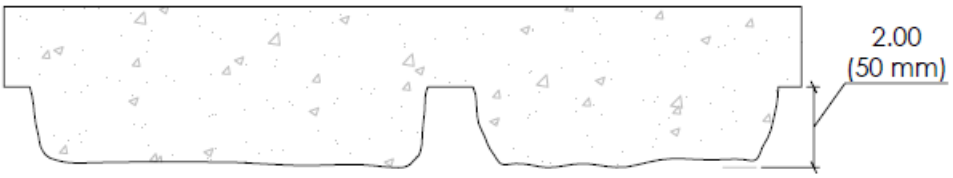

Visit **www.specformliners.com** for application guides and technical information

ThermoSpec^{tm}
SINGLE OR MULTI-USE PLASTIC

Property	HIPS	ABS
Tensile D638	3700	5300
IFlexural D7905	-	9300
Hardness D786	-	105
Material Weights - lbs/ft^2		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843
Thicknesses Available		
0.070, 0.090, 0.110, 0.145, 0.155, 0.180		

ElastoSpec Lite^{tm} Semi-Elastomeric
MULTI-USE MATERIAL

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1/4" + Relief		

ElastoSpec^{tm} 100% Solid Urethane
BONDED TO 3/4" PLYWOOD

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1-1/8" + Relief		

Call for ThermoSpec^{tm} Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available
ElastoSpec^{tm} Customized Panel Sizes and Art Panels

Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460


Spec Formliners, Inc.
Impressive on Concrete

Pattern Number: **1535**

Amboy Cut Stone

2" (50mm) maximum depth
Panel size 24" x 96", various stone layouts for random placement



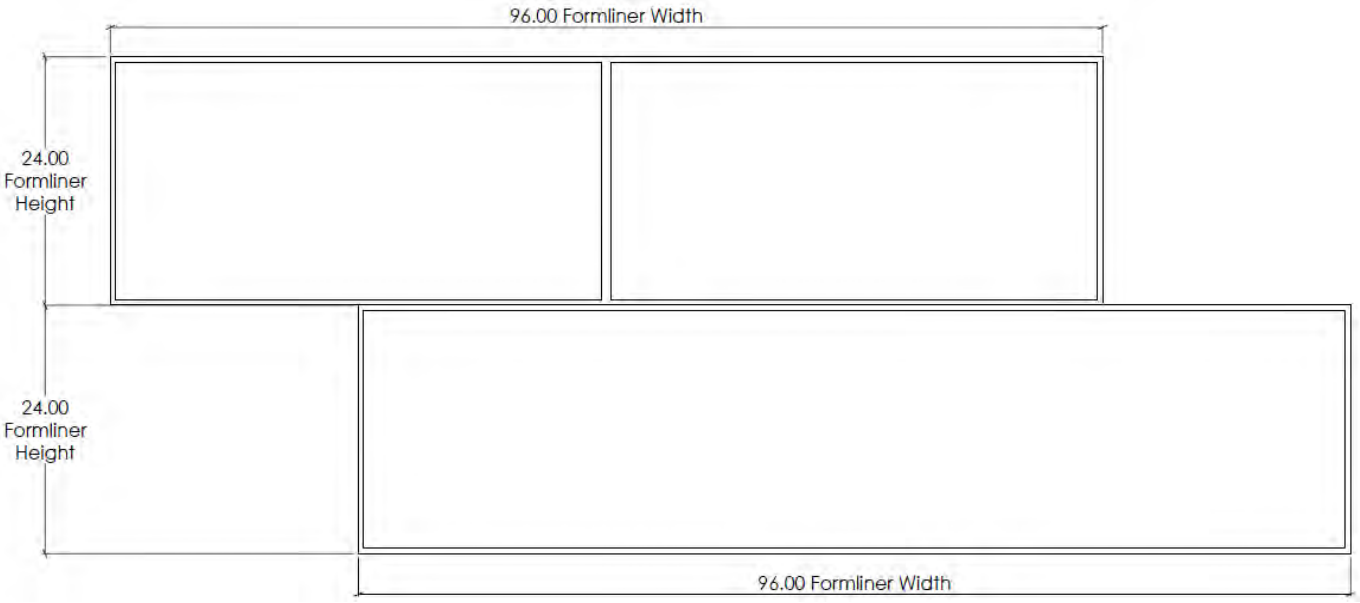

Note: Pa


Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460

Spec Formliners, Inc.
Impressive on Concrete


Pattern Number: **1536**

Mammoth Cobblestone

1-1/4" (32mm) maximum depth. Rock sizes from 3" to 6" - 3/4" mortar joint

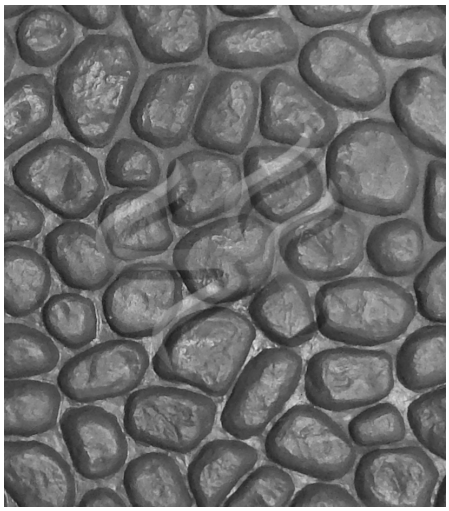

CONCRETE

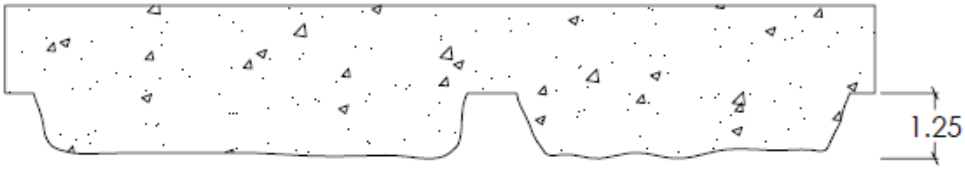

Visit **www.specformliners.com** for application guides and technical information

ThermoSpec^{tm}
SINGLE OR MULTI-USE PLASTIC

Property	HIPS	ABS
Tensile D638	3700	5300
IFlexural D7905	-	9300
Hardness D786	-	105
Material Weights - lbs/ft^2		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843
Thicknesses Available		
0.070, 0.090, 0.110, 0.145, 0.155, 0.180		

ElastoSpec Lite^{tm} Semi-Elastomeric
MULTI-USE MATERIAL

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1/4" + Relief		

ElastoSpec^{tm} 100% Solid Urethane
BONDED TO 3/4" PLYWOOD

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1-1/8" + Relief		

Call for ThermoSpec^{tm} Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available
ElastoSpec^{tm} Customized Panel Sizes and Art Panels


Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460

Spec Formliners, Inc.
Impressive on Concrete


Pattern Number: **1536**

Mammoth Cobblestone

1-1/4" (32mm) maximum depth. Rock sizes from 3" to 6" - 3/4" mortar joint

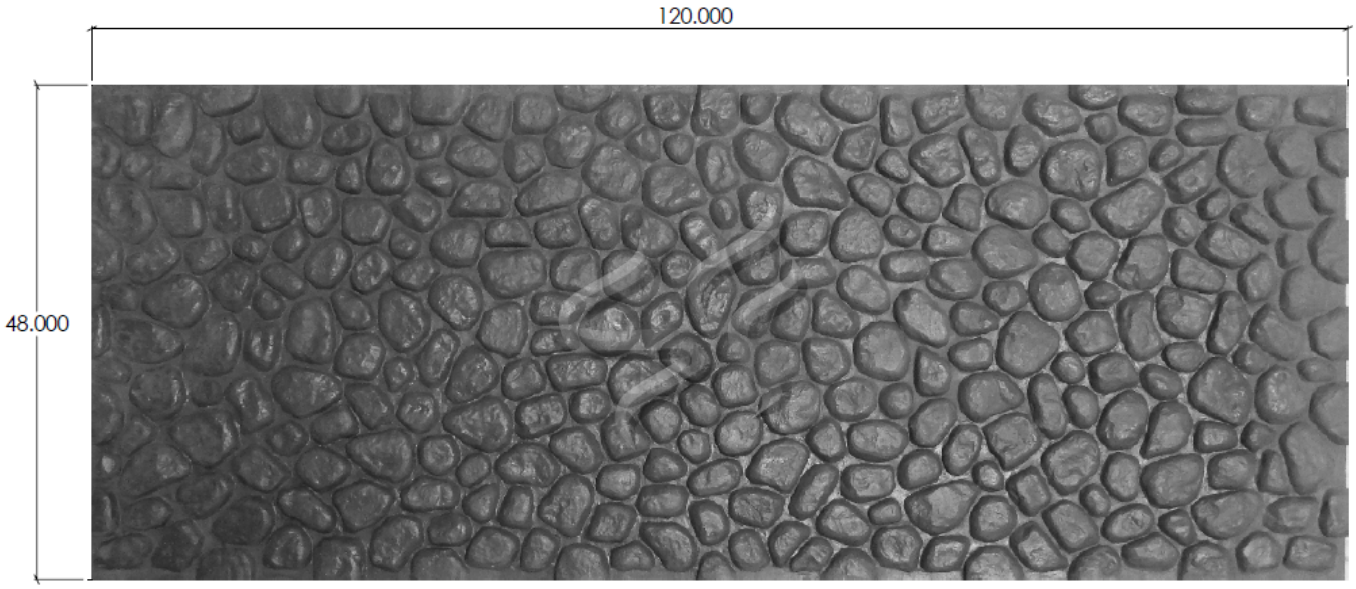

Panels are available in 4'x8', 4'x10' and 4'x12'.
***Actual Stone Layout may differ from drawing.**

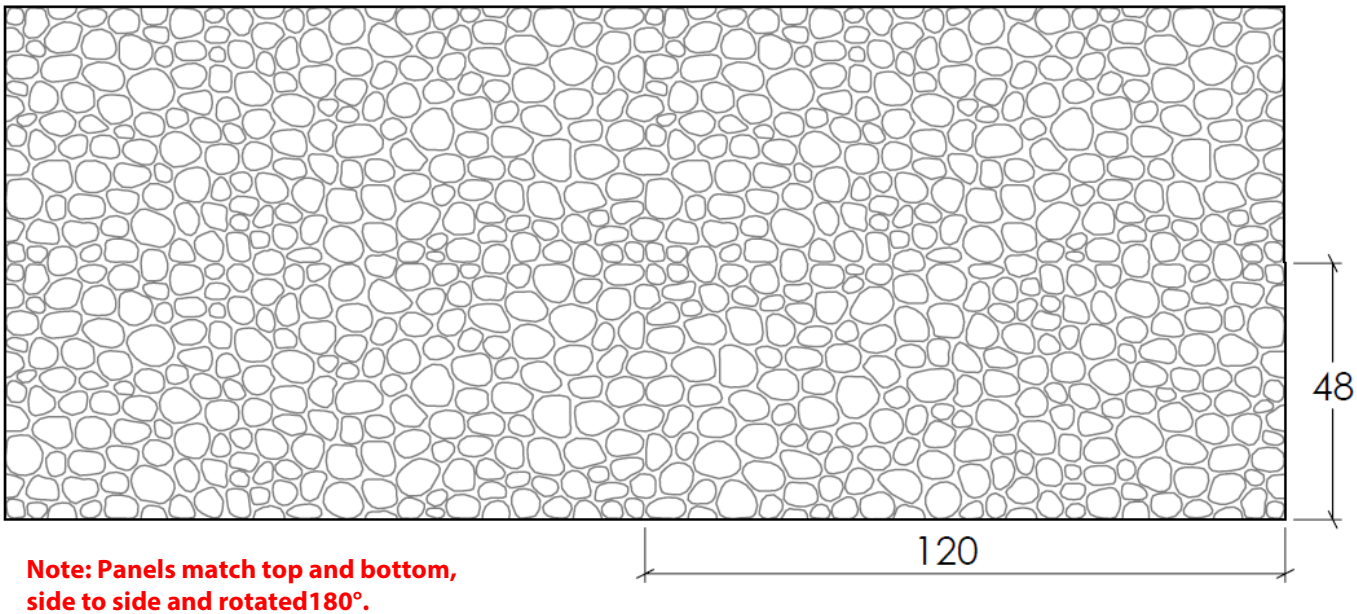

Note: Panels match top and bottom, side to side and rotated180°.

Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460

Spec Formliners, Inc.
Impressive on Concrete


Pattern Number: **1537**

Colorado Red Flagstone

2" (51mm) maximum depth
Various size sedimentary rock



CONCRETE

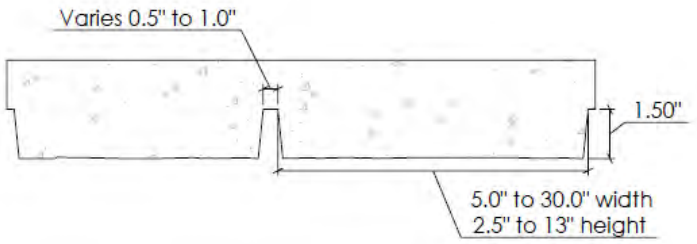

Visit **www.specformliners.com** for application guides and technical information

ThermoSpec^{tm}
SINGLE OR MULTI-USE PLASTIC

Property	HIPS	ABS
Tensile D638	3700	5300
IFlexural D7905	-	9300
Hardness D786	-	105
Material Weights - lbs/ft^2		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843
Thicknesses Available		
0.070, 0.090, 0.110, 0.145, 0.155, 0.180		

ElastoSpec Lite^{tm} Semi-Elastomeric
MULTI-USE MATERIAL

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1/4" + Relief		

ElastoSpec^{tm} 100% Solid Urethane
BONDED TO 3/4" PLYWOOD

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1-1/8" + Relief		

Call for ThermoSpec^{tm} Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available
ElastoSpec^{tm} Customized Panel Sizes and Art Panels

Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460


Spec Formliners, Inc.
Impressive on Concrete

Pattern Number: **1537**

Colorado Red Flagstone

2" (51mm) maximum depth
Various size sedimentary rock



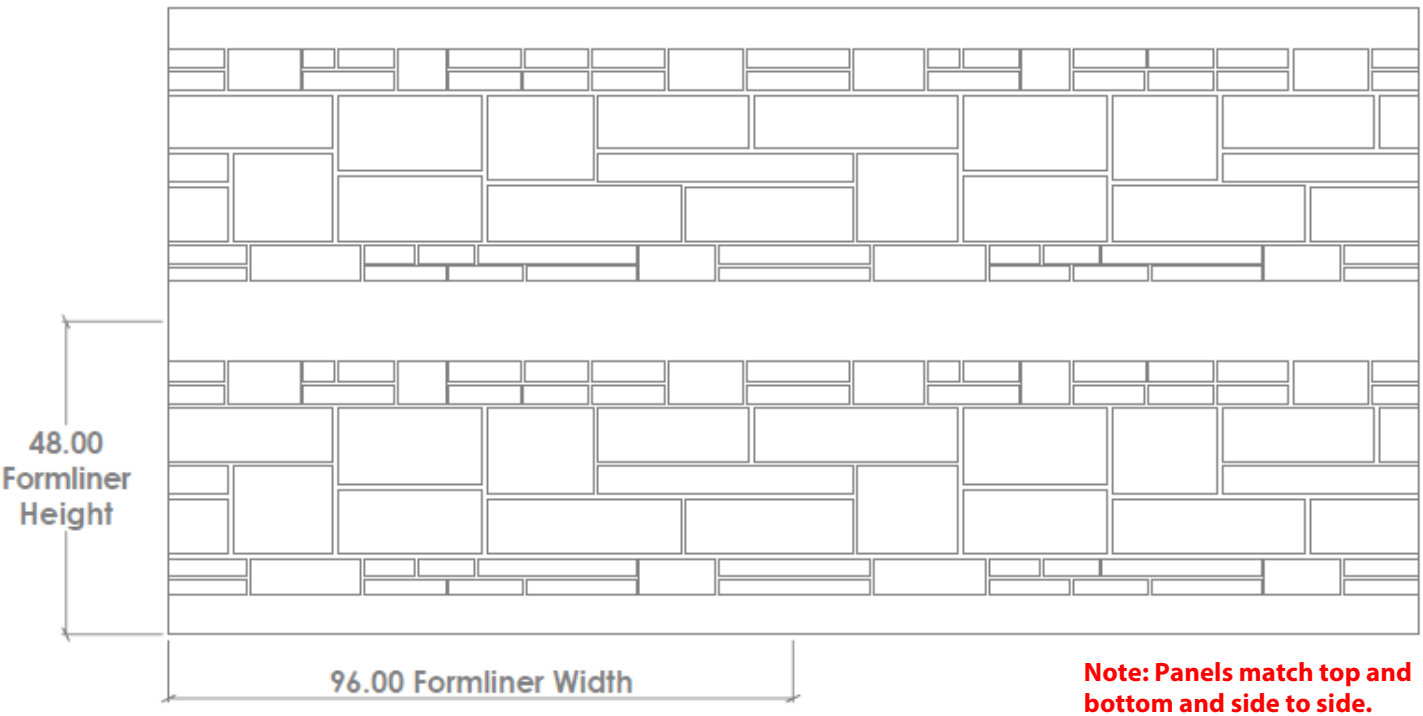

Note: Panels match top and bottom and side to side.

Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460

Spec Formliners, Inc.
Impressive on Concrete


Pattern Number: **1538**

Cut Textured Stone

Rock Sizes 14” to 45” - 14-3/4” coursing
Relief in ElastoSpec and ElastoSpec Lite available from 1-1/2” to 4” depth



CONCRETE

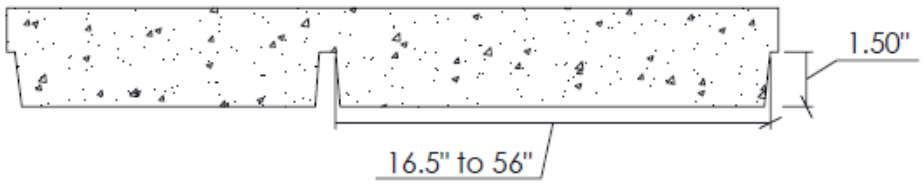

Standard Plastic tool size is 44.25” x 96” with 1-1/2” max. depth

Visit **www.specformliners.com** for application guides and technical information

ThermoSpec[tm]
SINGLE OR MULTI-USE PLASTIC

Property	HIPS	ABS
Tensile D638	3700	5300
IFlexural D7905	-	9300
Hardness D786	-	105
Material Weights - lbs/ft²		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843
Thicknesses Available		
0.070, 0.090, 0.110, 0.145, 0.155, 0.180		

ElastoSpec Lite[tm] Semi-Elastomeric
MULTI-USE MATERIAL

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
Material Weights - lbs/ft²		
Varies by Pattern		
Maximum Thickness		
1/4" + Relief		

ElastoSpec[tm] 100% Solid Urethane
BONDED TO 3/4” PLYWOOD

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft²		
Varies by Pattern		
Maximum Thickness		
1-1/8" + Relief		

Call for ThermoSpec[tm] Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available
ElastoSpec[tm] Customized Panel Sizes and Art Panels


Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460


Spec Formliners, Inc.
Impressive on Concrete

Pattern Number: **1538**

Cut Textured Stone

Rock Sizes 14” to 45” - 14-3/4” coursing
Relief in ElastoSpec and ElastoSpec Lite available from 1-1/2” to 4” depth

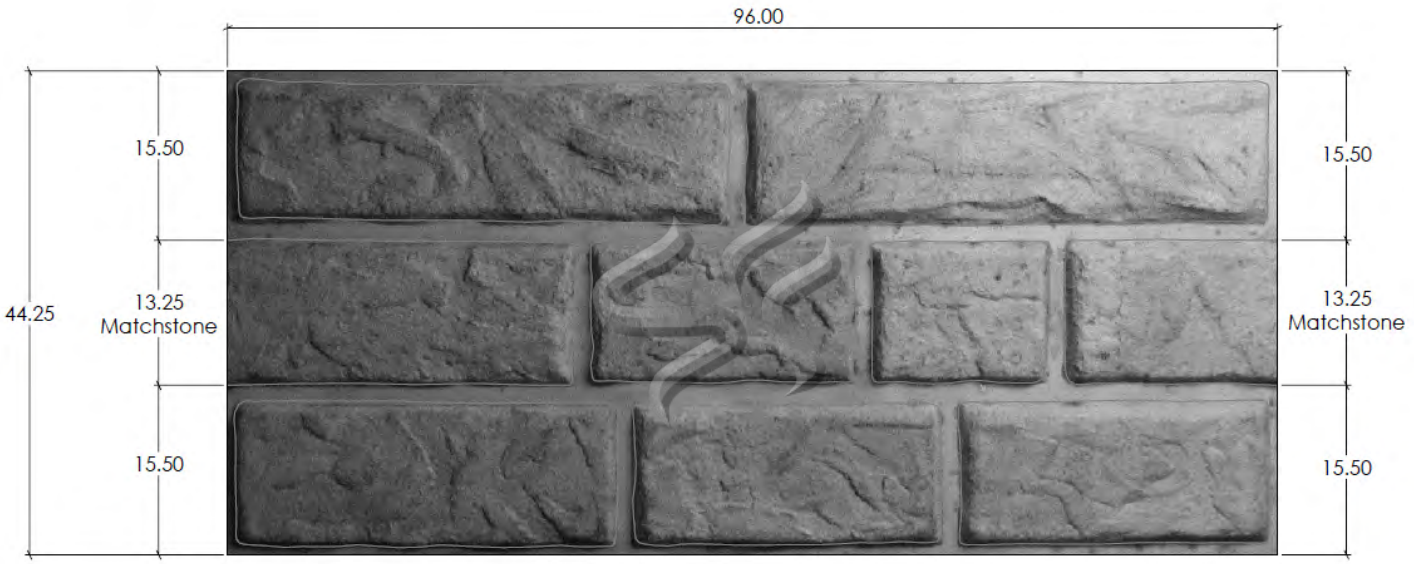

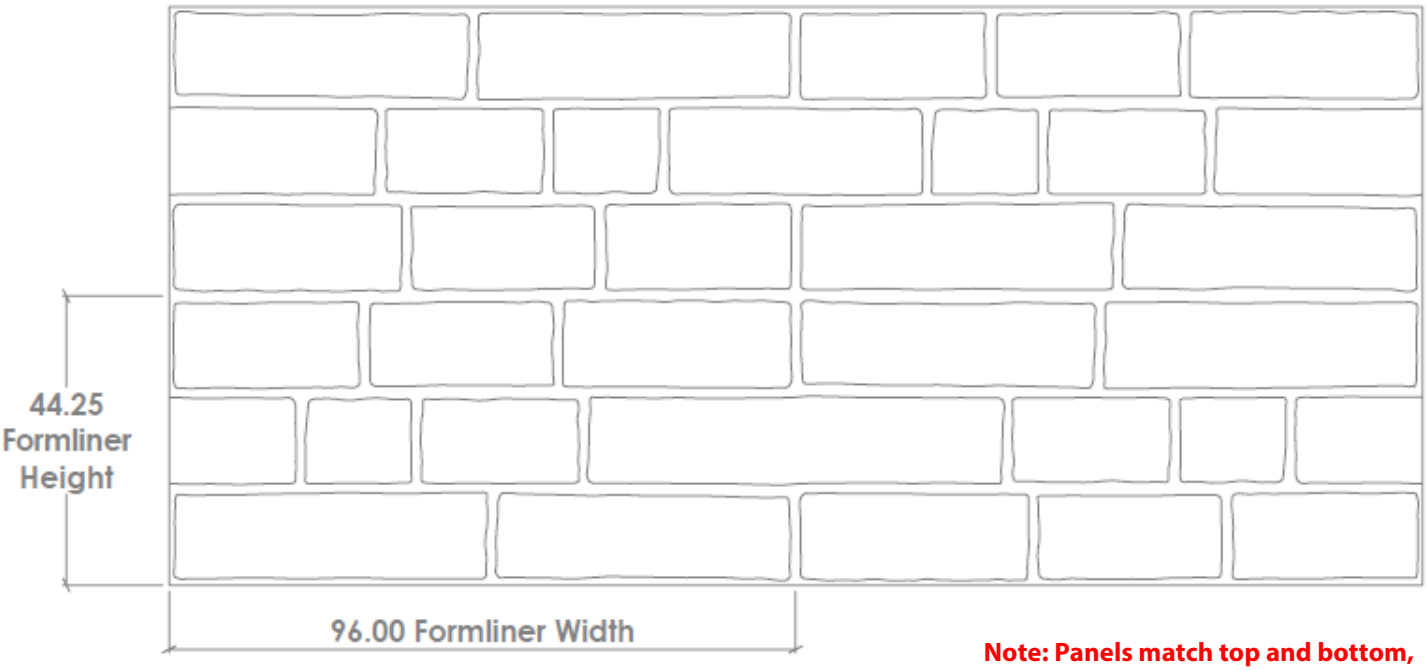

Note: Panels match top and bottom, side to side and rotated180°.

Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460

Spec Formliners, Inc.
Impressive on Concrete


Pattern Number: **1541**

Rush Creek Ashlar

2" (51mm) maximum depth. Stone sizes to 30". Plastic tool is 1-1/2" depth



CONCRETE

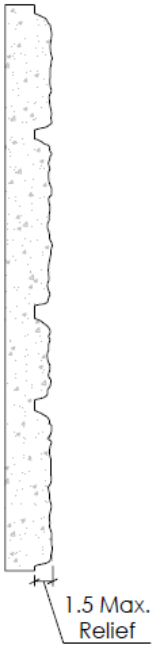

Visit **www.specformliners.com** for application guides and technical information

ThermoSpec[tm]
SINGLE OR MULTI-USE PLASTIC

Property	HIPS	ABS
Tensile D638	3700	5300
IFlexural D7905	-	9300
Hardness D786	-	105
Material Weights - lbs/ft²		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843
Thicknesses Available		
0.070, 0.090, 0.110, 0.145, 0.155, 0.180		

ElastoSpec Lite[tm] Semi-Elastomeric
MULTI-USE MATERIAL

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
Material Weights - lbs/ft²		
Varies by Pattern		
Maximum Thickness		
1/4" + Relief		

ElastoSpec[tm] 100% Solid Urethane
BONDED TO 3/4" PLYWOOD

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft²		
Varies by Pattern		
Maximum Thickness		
1-1/8" + Relief		

Call for ThermoSpec[tm] Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available
ElastoSpec[tm] Customized Panel Sizes and Art Panels


Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460


Spec Formliners, Inc.
Impressive on Concrete

Pattern Number: **1541**

Rush Creek Ashlar

2” (51mm) maximum depth. Stone sizes to 30”. Plastic tool is 1-1/2” depth

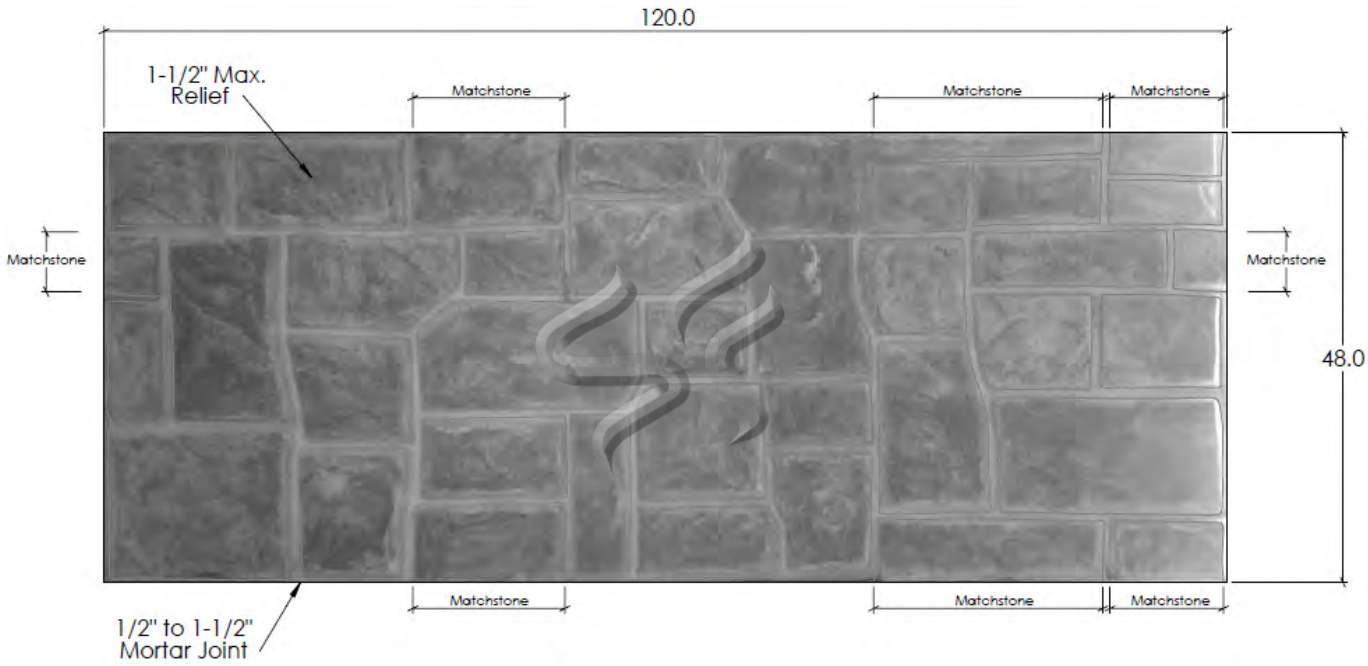

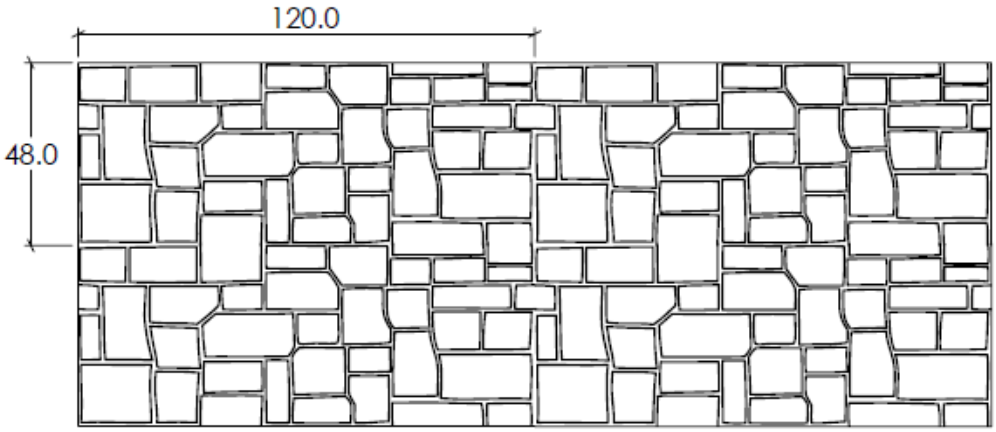

Note: Panels match top and bottom and side to side.

Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460

Spec Formliners, Inc.
Impressive on Concrete


Pattern Number: **1542**

Portland Dry Stack

1-1/2" (38mm) maximum relief
3/4" (19mm) mortar joint
5" to 24" max width, 4" to 8" height stones



CONCRETE

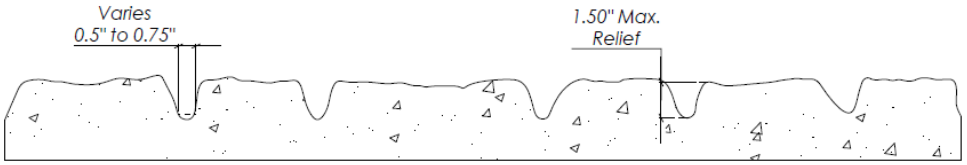

Visit **www.specformliners.com** for application guides and technical information

ThermoSpec^{tm}
SINGLE OR MULTI-USE PLASTIC

Property	HIPS	ABS
Tensile D638	3700	5300
IFlexural D7905	-	9300
Hardness D786	-	105
Material Weights - lbs/ft^2		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843
Thicknesses Available		
0.070, 0.090, 0.110, 0.145, 0.155, 0.180		

ElastoSpec Lite^{tm} Semi-Elastomeric
MULTI-USE MATERIAL

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1/4" + Relief		

ElastoSpec^{tm} 100% Solid Urethane
BONDED TO 3/4" PLYWOOD

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1-1/8" + Relief		

Call for ThermoSpec^{tm} Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available
ElastoSpec^{tm} Customized Panel Sizes and Art Panels

Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460

Spec Formliners, Inc.
Impressive on Concrete


Pattern Number: **1542**

Portland Dry Stack

1-1/2" (38mm) maximum relief
3/4" (19mm) mortar joint
5" to 24" max width, 4" to 8" height stones



Panels are available in 4'x12'.
***Actual Stone Layout may differ from drawing.**

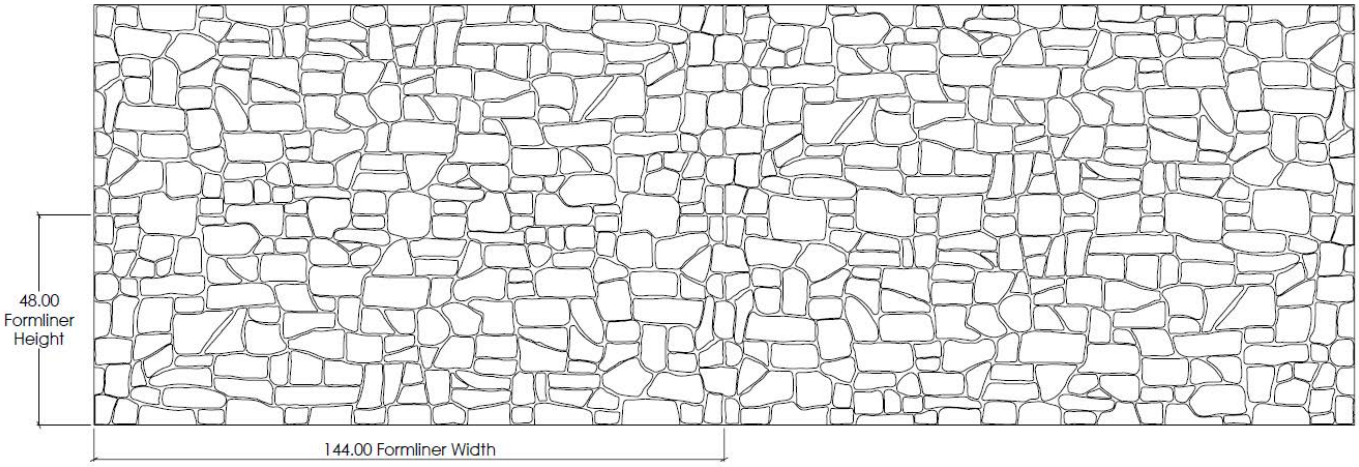

Note: Panels match top and bottom, side to side and rotated180°.

Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460


Spec Formliners, Inc.
Impressive on Concrete

Pattern Number: **1544**

Ashlar Dry Stack

3/4" (19mm) mortar joint
5" to 26" width and 1" to 10" height rocks



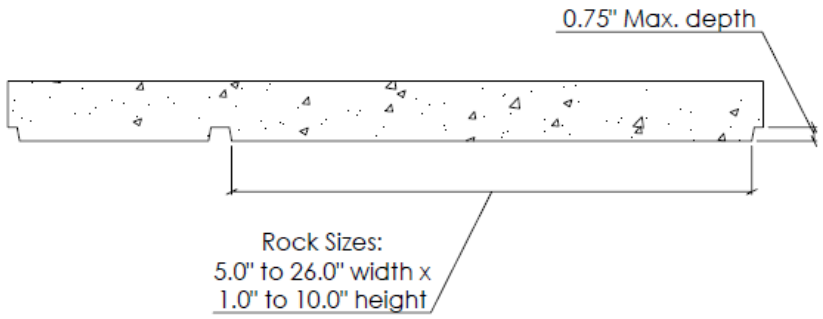

Visit **www.specformliners.com** for application guides and technical information

ThermoSpec^{tm}
SINGLE OR MULTI-USE PLASTIC

Property	HIPS	ABS
Tensile D638	3700	5300
IFlexural D7905	-	9300
Hardness D786	-	105
Material Weights - lbs/ft^2		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843
Thicknesses Available		
0.070, 0.090, 0.110, 0.145, 0.155, 0.180		

ElastoSpec Lite^{tm} Semi-Elastomeric
MULTI-USE MATERIAL

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1/4" + Relief		

ElastoSpec^{tm} 100% Solid Urethane
BONDED TO 3/4" PLYWOOD

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1-1/8" + Relief		

Call for ThermoSpec^{tm} Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available
ElastoSpec^{tm} Customized Panel Sizes and Art Panels


Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460

Spec Formliners, Inc.
Impressive on Concrete


Pattern Number: **1544**

Ashlar Dry Stack

3/4" (19mm) mortar joint
5" to 26" width and 1" to 10" height rocks

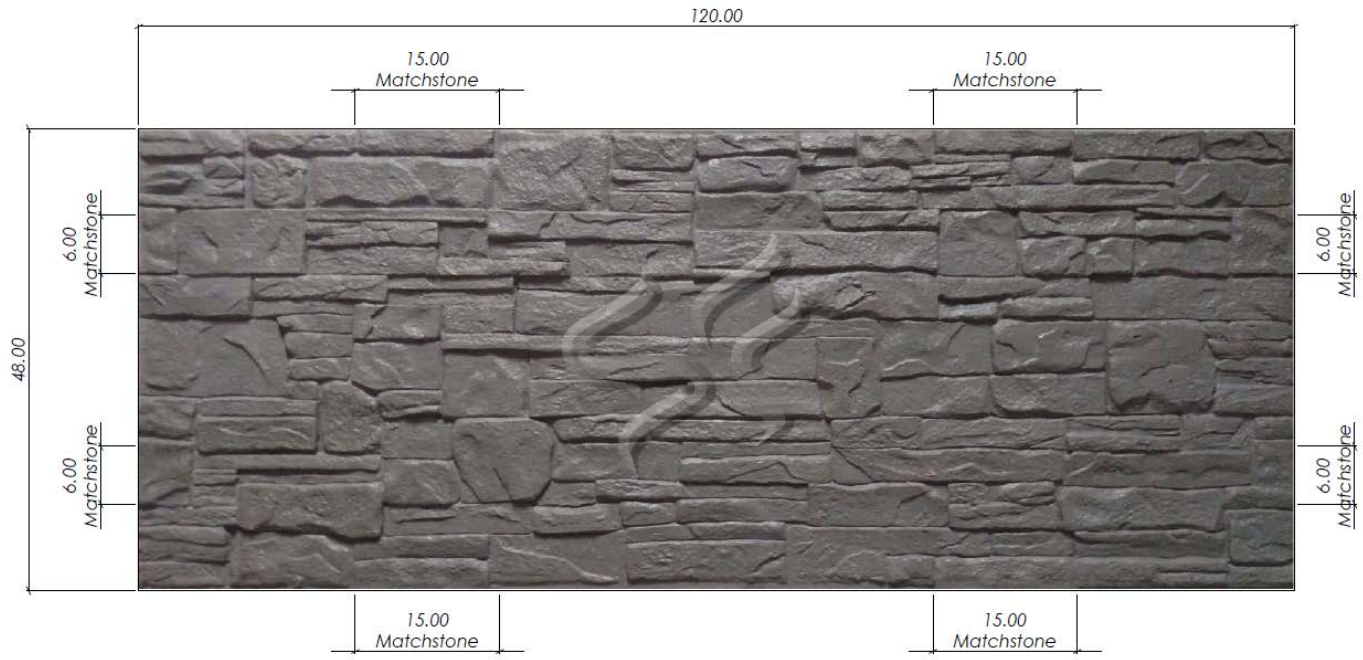

***Actual Stone Layout may differ from drawing.**

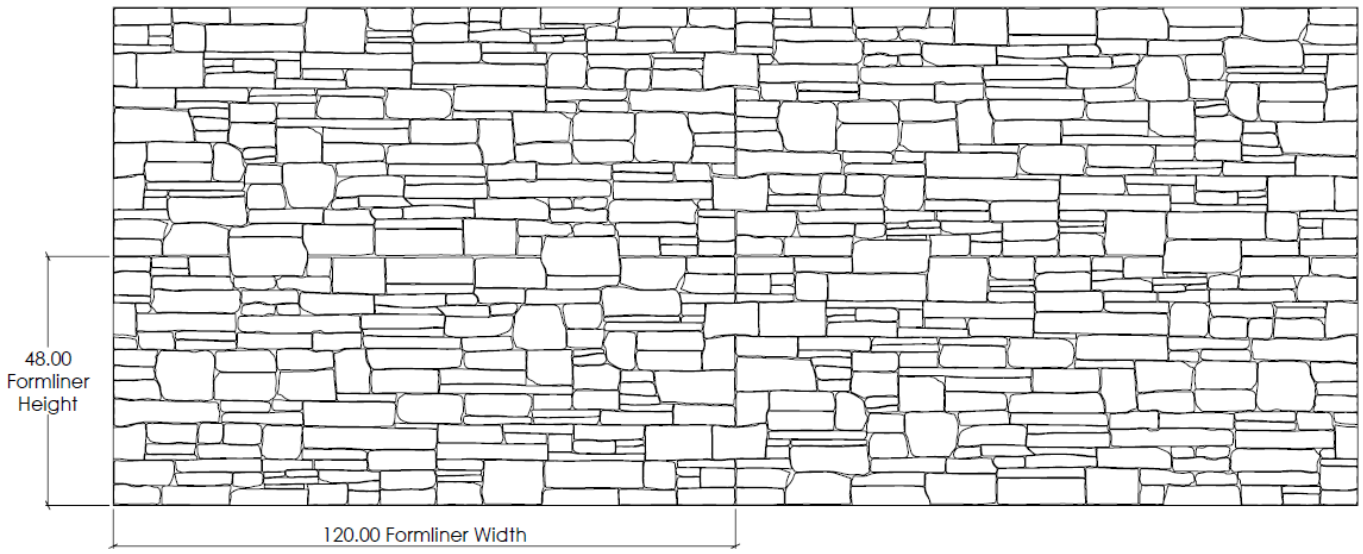

Note: Panels match top and bottom, side to side and rotated180°.


Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460


Spec Formliners, Inc.
Impressive on Concrete

Pattern Number: **1545**

Kona Rock

1/2" to 3/4" (13 to 19mm) mortar joint
4" to 21" width and 4" to 21" height rocks

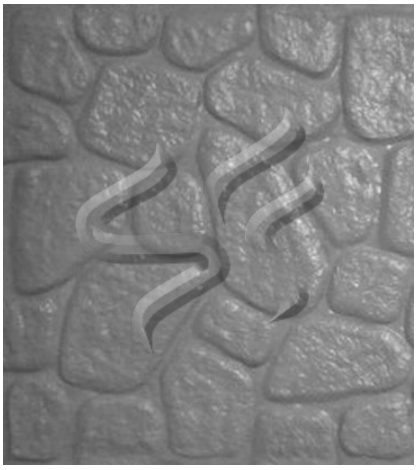

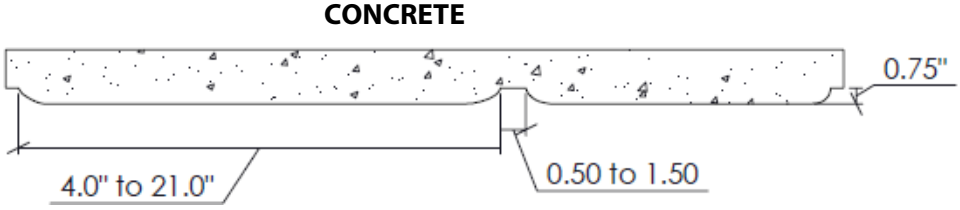

Visit **www.specformliners.com** for application guides and technical information

ThermoSpec^{tm}
SINGLE OR MULTI-USE PLASTIC

Property	HIPS	ABS
Tensile D638	3700	5300
IFlexural D7905	-	9300
Hardness D786	-	105
Material Weights - lbs/ft^2		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843
Thicknesses Available		
0.070, 0.090, 0.110, 0.145, 0.155, 0.180		

ElastoSpec Lite^{tm} Semi-Elastomeric
MULTI-USE MATERIAL

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1/4" + Relief		

ElastoSpec^{tm} 100% Solid Urethane
BONDED TO 3/4" PLYWOOD

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1-1/8" + Relief		

Call for ThermoSpec^{tm} Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available
ElastoSpec^{tm} Customized Panel Sizes and Art Panels

Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460


Spec Formliners, Inc.
Impressive on Concrete

Pattern Number: **1545**

Kona Rock

1/2" to 3/4" (13 to 19mm) mortar joint
4" to 21" width and 4" to 21" height rocks



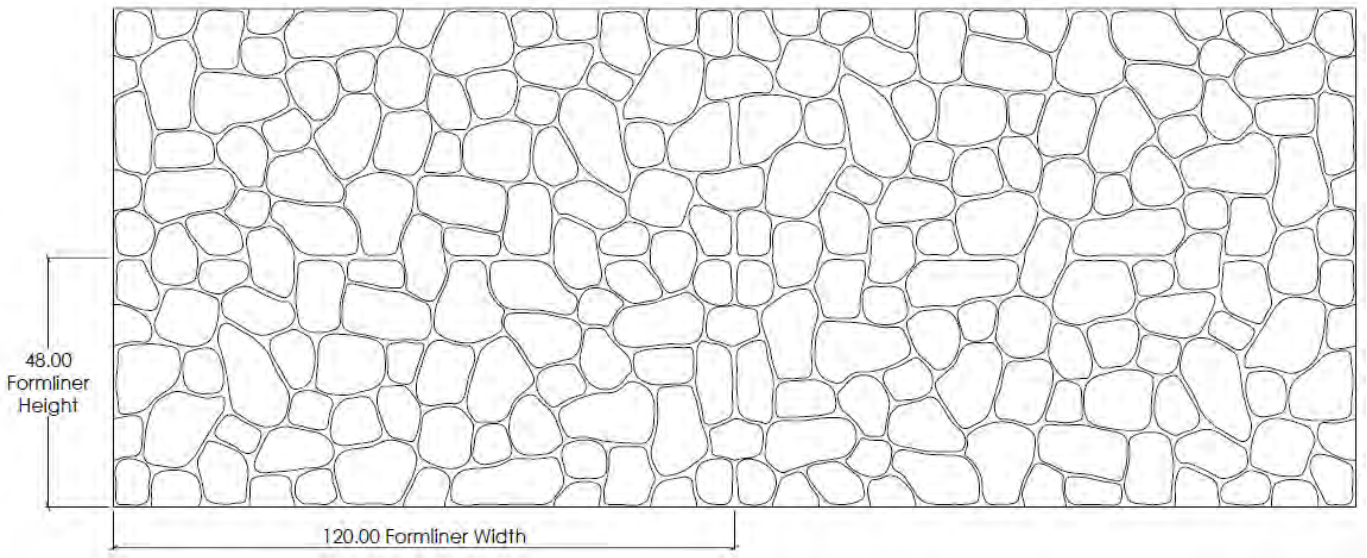

Note: Panels match top and bottom, side to side and rotated180°.


Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460


Spec Formliners, Inc.
Impressive on Concrete

Pattern Number: **1546**

American Cut Stone

3” (76mm) maximum relief
3/4" (19mm) mortar joint
14” to 47" width and 14" height stones

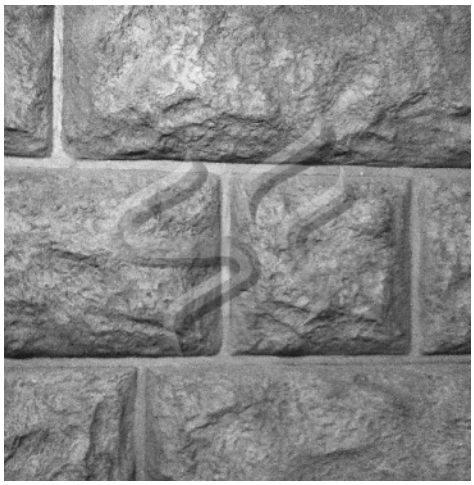

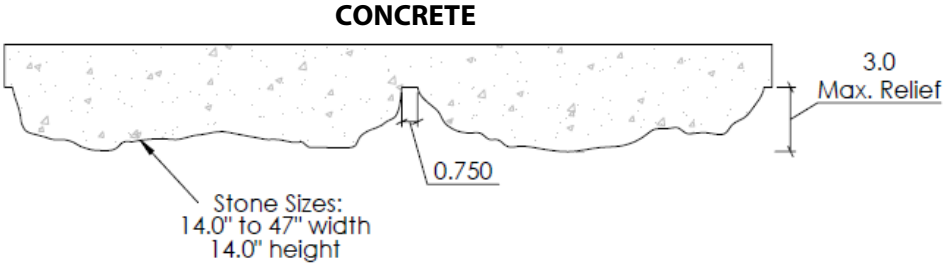

Visit **www.specformliners.com** for application guides and technical information

ThermoSpec^{tm}
SINGLE OR MULTI-USE PLASTIC

Property	HIPS	ABS
Tensile D638	3700	5300
IFlexural D7905	-	9300
Hardness D786	-	105
Material Weights - lbs/ft^2		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843
Thicknesses Available		
0.070, 0.090, 0.110, 0.145, 0.155, 0.180		

ElastoSpec Lite^{tm} Semi-Elastomeric
MULTI-USE MATERIAL

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1/4" + Relief		

ElastoSpec^{tm} 100% Solid Urethane
BONDED TO 3/4” PLYWOOD

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1-1/8" + Relief		

Call for ThermoSpec^{tm} Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available
ElastoSpec^{tm} Customized Panel Sizes and Art Panels

Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460


Spec Formliners, Inc.


Impressive on Concrete

Pattern Number: **1546**

American Cut Stone

3” (76mm) maximum relief
3/4" (19mm) mortar joint
14” to 47" width and 14" height stones

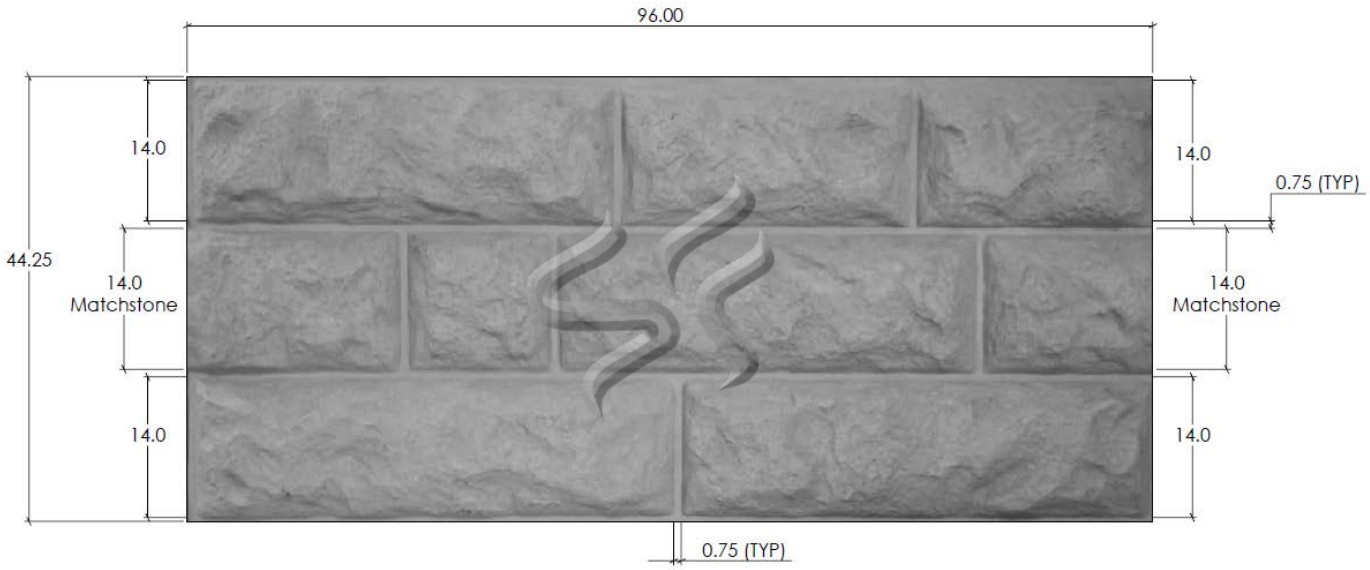

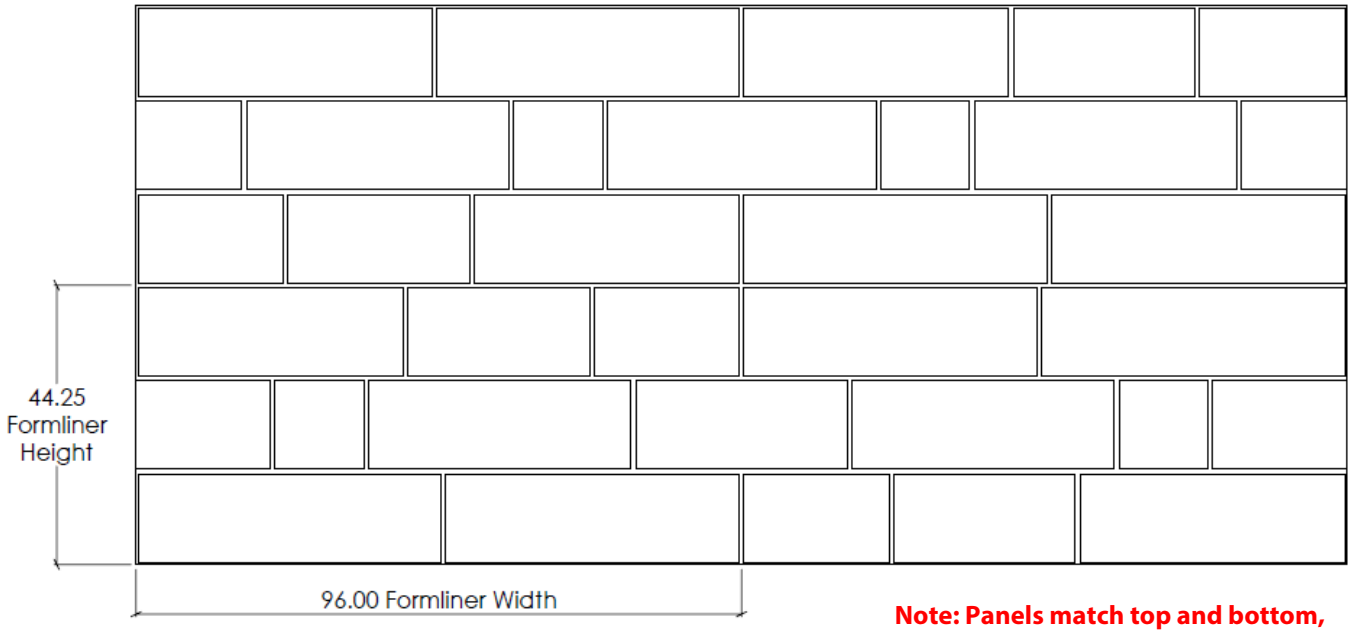

Note: Panels match top and bottom, side to side and rotated180°.


Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460

Spec Formliners, Inc.
Impressive on Concrete


Pattern Number: **1547**

Colorado Flagstone

1” (25mm) mortar joint
8” to 14" maximum stone size

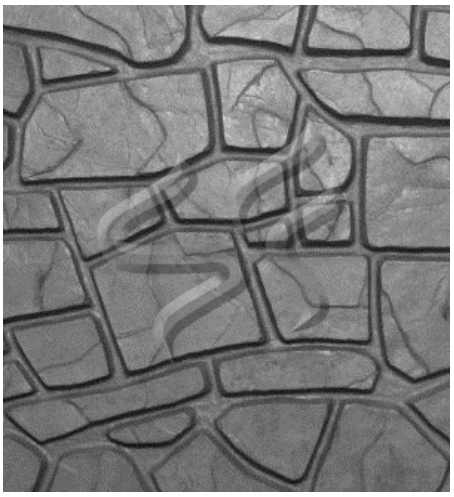

CONCRETE

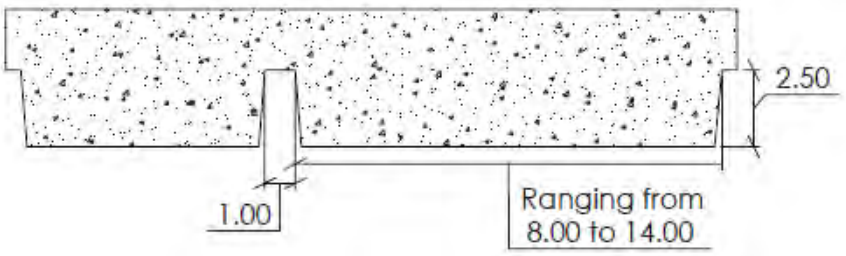

Visit **www.specformliners.com** for application guides and technical information

ThermoSpec[tm]
SINGLE OR MULTI-USE PLASTIC

Property	HIPS	ABS
Tensile D638	3700	5300
IFlexural D7905	-	9300
Hardness D786	-	105
Material Weights - lbs/ft²		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843
Thicknesses Available		
0.070, 0.090, 0.110, 0.145, 0.155, 0.180		

ElastoSpec Lite[tm] Semi-Elastomeric
MULTI-USE MATERIAL

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
Material Weights - lbs/ft²		
Varies by Pattern		
Maximum Thickness		
1/4" + Relief		

ElastoSpec[tm] 100% Solid Urethane
BONDED TO 3/4” PLYWOOD

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft²		
Varies by Pattern		
Maximum Thickness		
1-1/8" + Relief		

Call for ThermoSpec[tm] Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available
ElastoSpec[tm] Customized Panel Sizes and Art Panels


Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460


Spec Formliners, Inc.
Impressive on Concrete

Pattern Number: **1547**

Colorado Flagstone

1" (25mm) mortar joint
8" to 14" maximum stone size

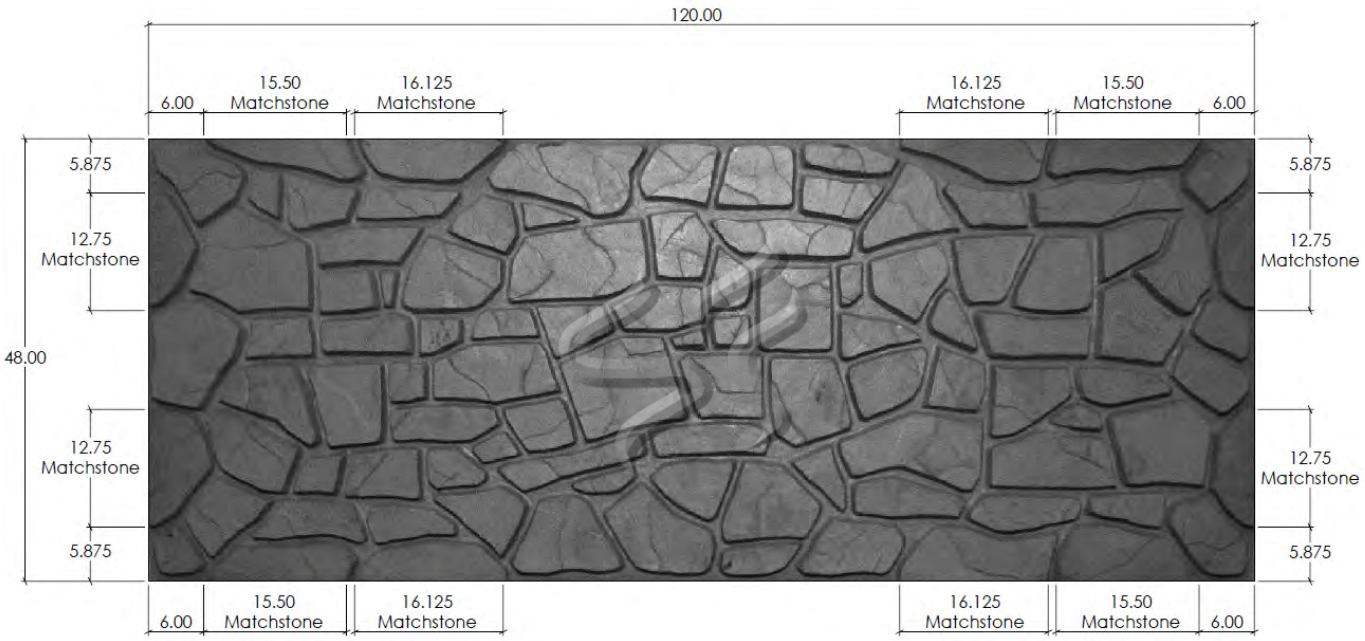

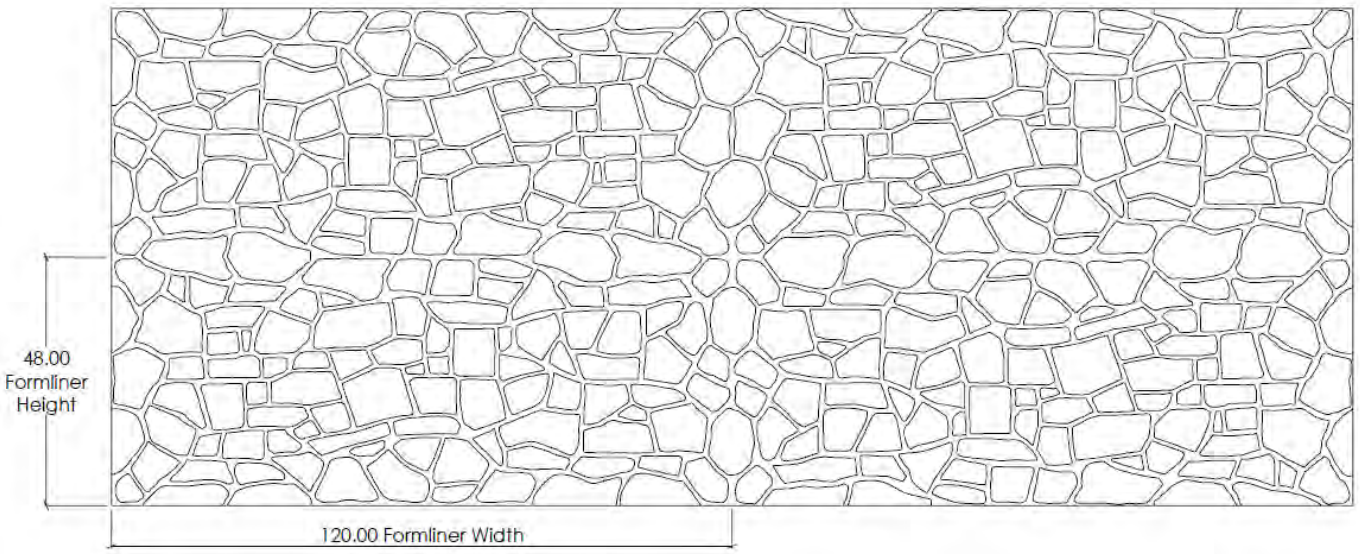

Note: Panels match top and bottom, side to side and rotated180°.


Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460


Spec Formliners, Inc.
Impressive on Concrete

Pattern Number: **1548**

Chester Dry Stack

1-1/2" (38mm) mortar joint
5" to 26" width and 1" to 10" height rocks

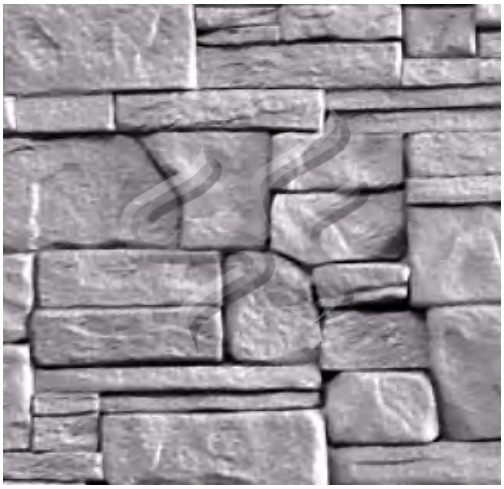

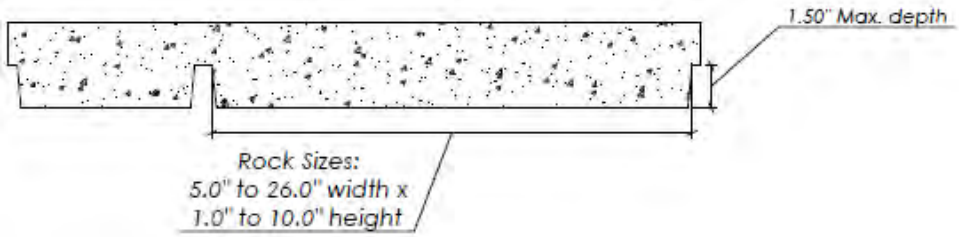

Visit **www.specformliners.com** for application guides and technical information

ThermoSpec^{tm}
SINGLE OR MULTI-USE PLASTIC

Property	HIPS	ABS
Tensile D638	3700	5300
IFlexural D7905	-	9300
Hardness D786	-	105
Material Weights - lbs/ft^2		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843
Thicknesses Available		
0.070, 0.090, 0.110, 0.145, 0.155, 0.180		

ElastoSpec Lite^{tm} Semi-Elastomeric
MULTI-USE MATERIAL

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1/4" + Relief		

ElastoSpec^{tm} 100% Solid Urethane
BONDED TO 3/4" PLYWOOD

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1-1/8" + Relief		

Call for ThermoSpec^{tm} Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available
ElastoSpec^{tm} Customized Panel Sizes and Art Panels


Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460


Spec Formliners, Inc.
Impressive on Concrete

Pattern Number: **1548**

Chester Dry Stack

1-1/2” (38mm) mortar joint
5” to 26" width and 1" to 10" height rocks

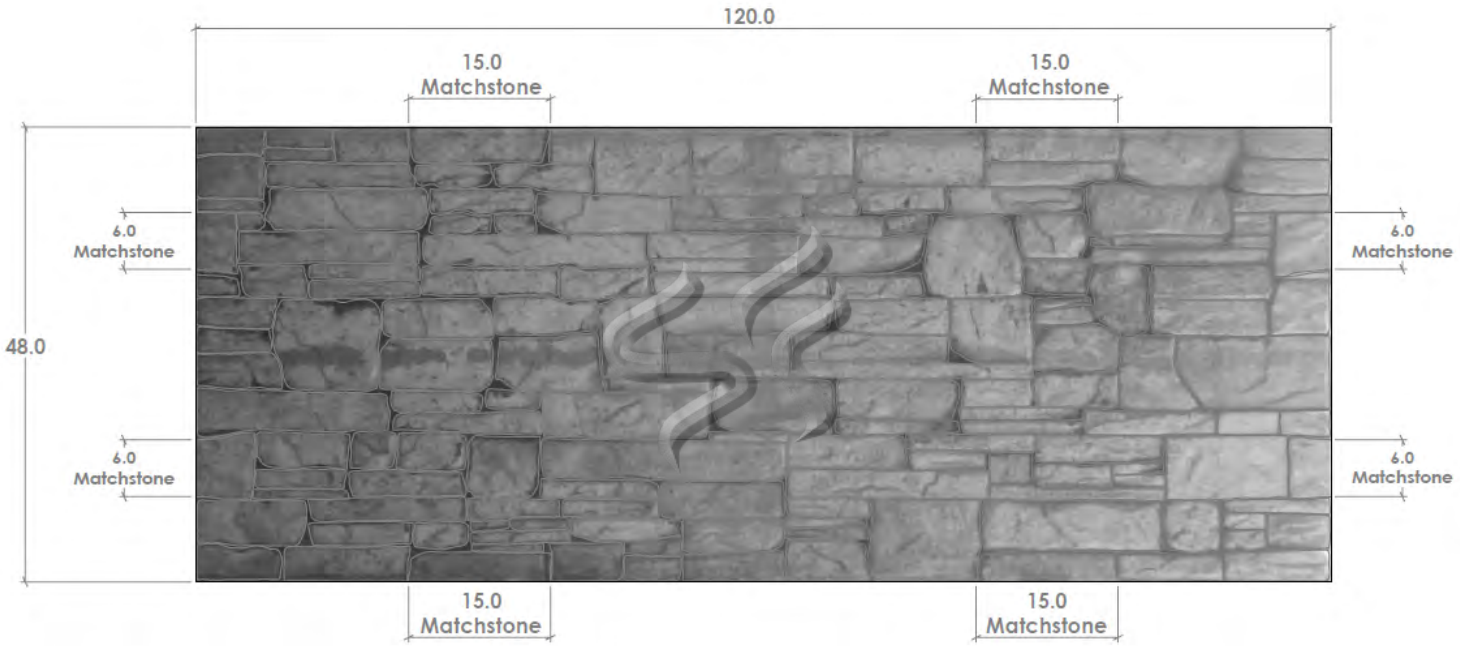

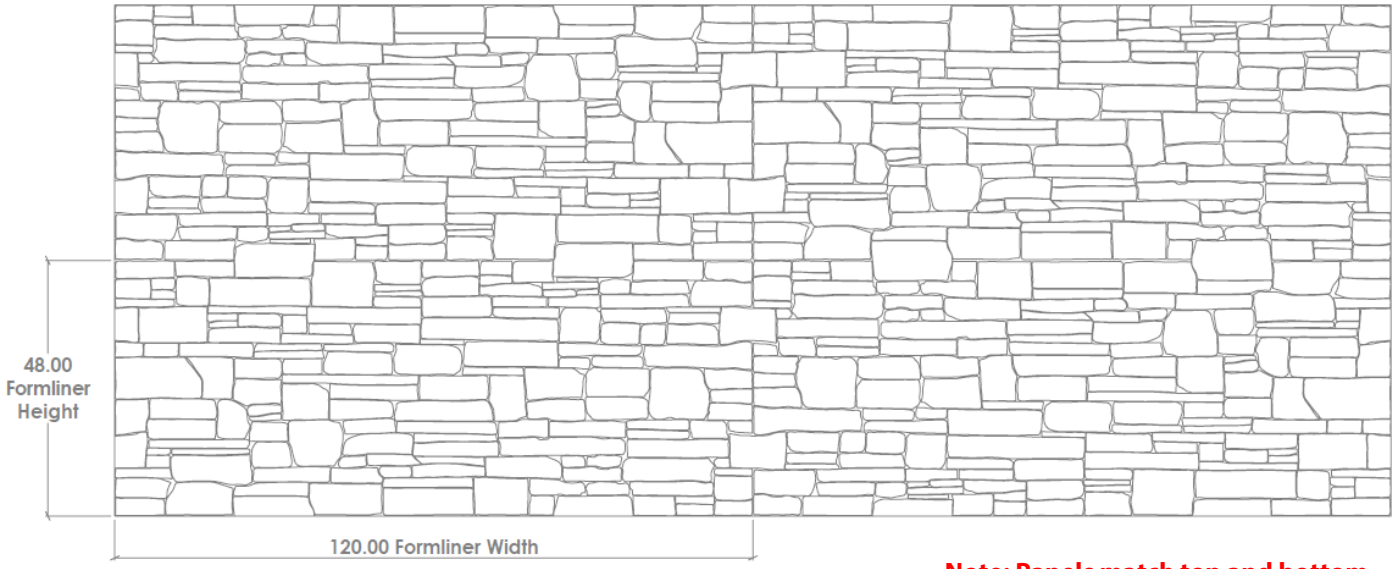

Note: Panels match top and bottom, side to side and rotated180°.

Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460

Spec Formliners, Inc.
Impressive on Concrete


Pattern Number: **1549**

Chiseled Limestone

1" (25mm) mortar joint
24" x 12" running bond pattern



CONCRETE

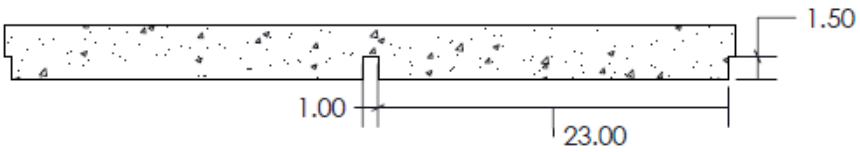

Visit **www.specformliners.com** for application guides and technical information

ThermoSpec^{tm}
SINGLE OR MULTI-USE PLASTIC

Property	HIPS	ABS
Tensile D638	3700	5300
IFlexural D7905	-	9300
Hardness D786	-	105
Material Weights - lbs/ft^2		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843
Thicknesses Available		
0.070, 0.090, 0.110, 0.145, 0.155, 0.180		

ElastoSpec Lite^{tm} Semi-Elastomeric
MULTI-USE MATERIAL

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1/4" + Relief		

ElastoSpec^{tm} 100% Solid Urethane
BONDED TO 3/4" PLYWOOD

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1-1/8" + Relief		

Call for ThermoSpec^{tm} Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available
ElastoSpec^{tm} Customized Panel Sizes and Art Panels


Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460


Spec Formliners, Inc.
Impressive on Concrete

Pattern Number: **1549**

Chiseled Limestone

1" (25mm) mortar joint
24" x 12" running bond pattern

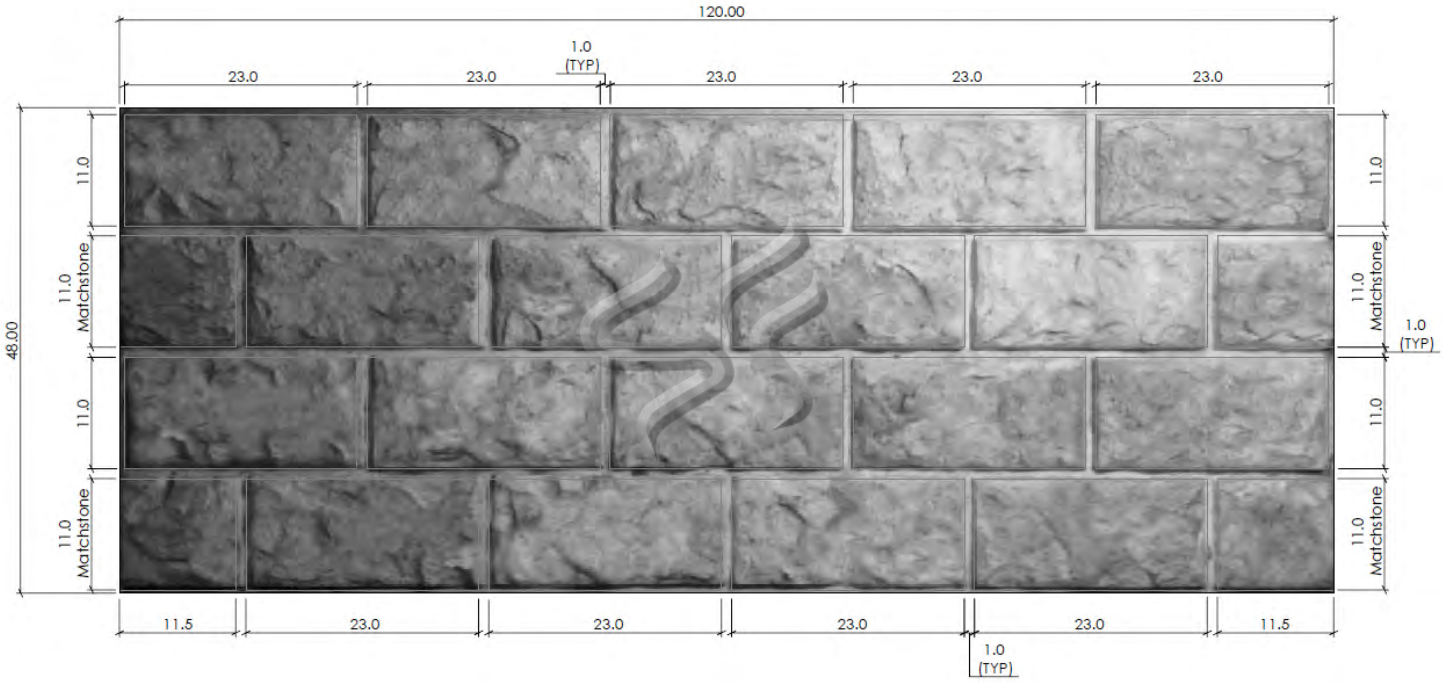

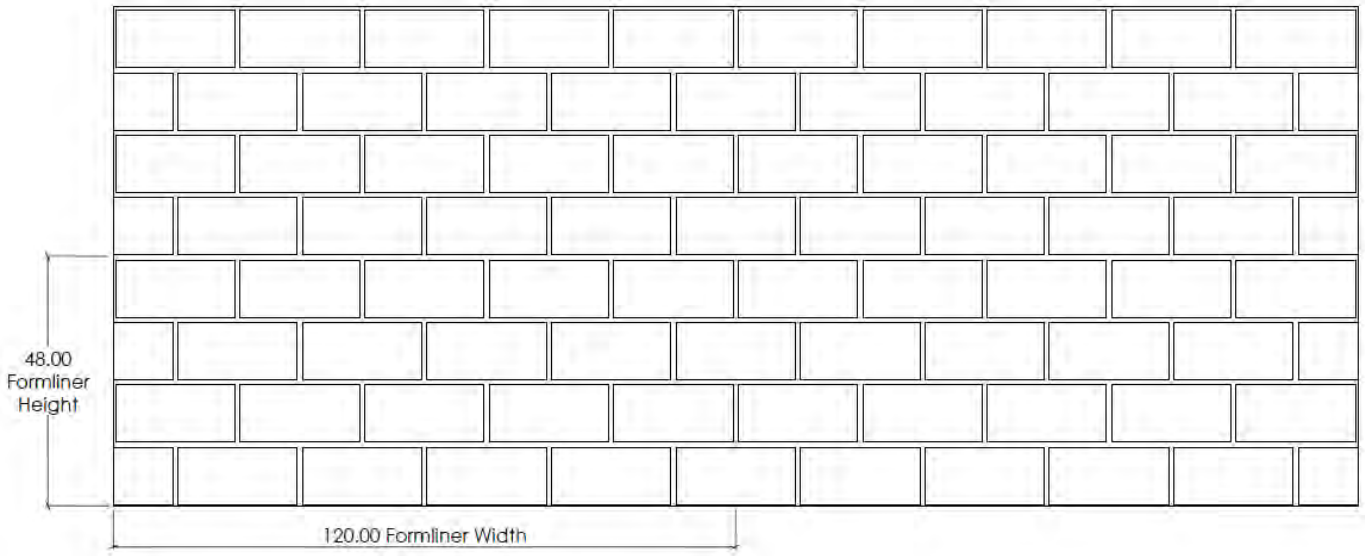

Note: Panels match top and bottom and side to side.

Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460

Spec Formliners, Inc.
Impressive on Concrete


Pattern Number: **1550**

Fractured Basalt

2" (50mm) maximum depth
Pattern matched edges



CONCRETE

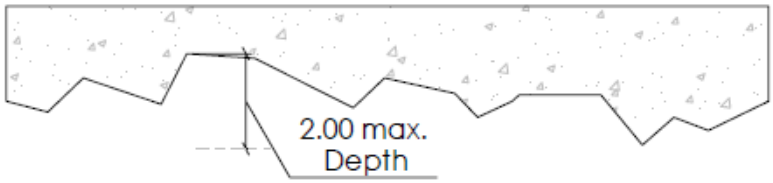

Visit **www.specformliners.com** for application guides and technical information

ThermoSpec^{tm}
SINGLE OR MULTI-USE PLASTIC

Property	HIPS	ABS
Tensile D638	3700	5300
IFlexural D7905	-	9300
Hardness D786	-	105
Material Weights - lbs/ft^2		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843
Thicknesses Available		
0.070, 0.090, 0.110, 0.145, 0.155, 0.180		

ElastoSpec Lite^{tm} Semi-Elastomeric
MULTI-USE MATERIAL

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1/4" + Relief		

ElastoSpec^{tm} 100% Solid Urethane
BONDED TO 3/4" PLYWOOD

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1-1/8" + Relief		

Call for ThermoSpec^{tm} Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available
ElastoSpec^{tm} Customized Panel Sizes and Art Panels

Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460

Spec Formliners, Inc.


Impressive on Concrete


Pattern Number: **1550**

Fractured Basalt

2" (50mm) maximum depth

Pattern matched edges

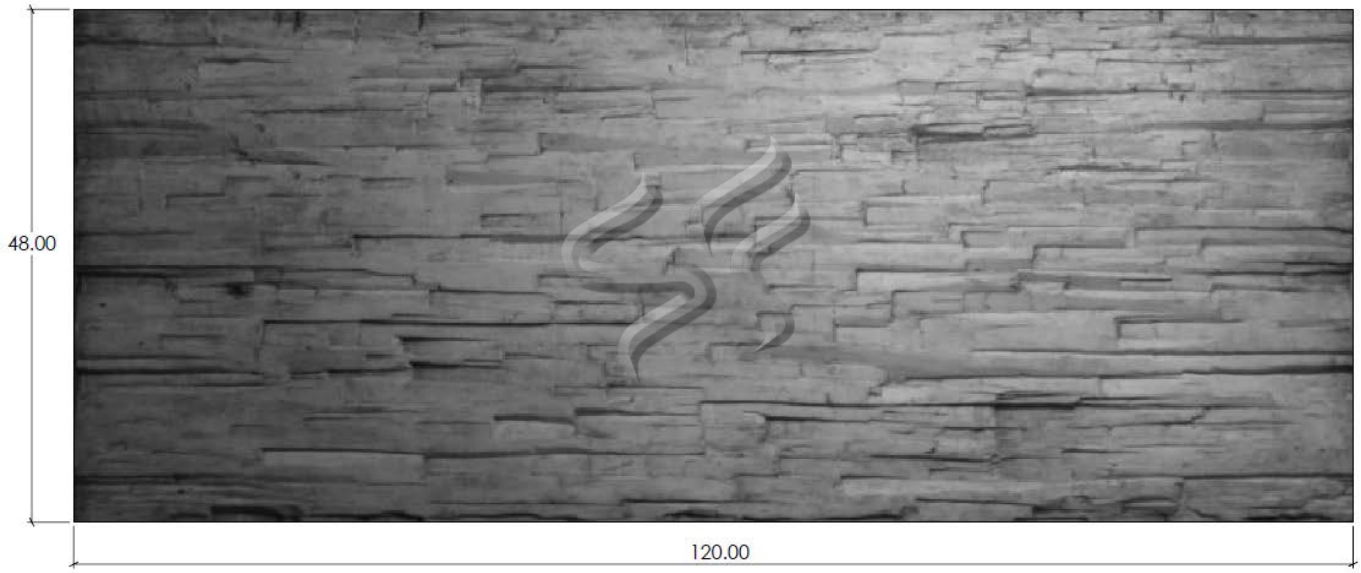

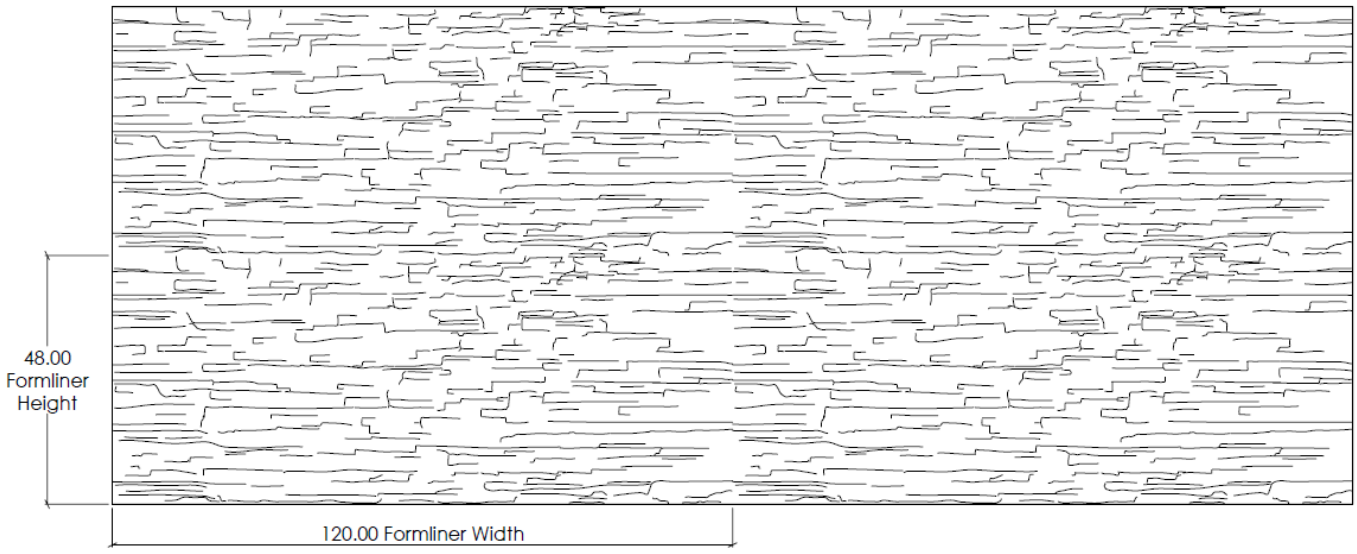

Note: Panels match top and bottom and side to side.

Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460

Spec Formliners, Inc.
Impressive on Concrete


Pattern Number: **1553**

Cut Ashlar

3/4" (19mm) mortar joint
Up to 30" stones



CONCRETE

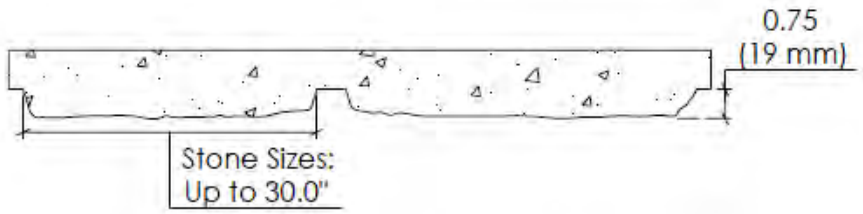

Visit **www.specformliners.com** for application guides and technical information

ThermoSpec^{tm}
SINGLE OR MULTI-USE PLASTIC

Property	HIPS	ABS
Tensile D638	3700	5300
IFlexural D7905	-	9300
Hardness D786	-	105
Material Weights - lbs/ft^2		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843
Thicknesses Available		
0.070, 0.090, 0.110, 0.145, 0.155, 0.180		

ElastoSpec Lite^{tm} Semi-Elastomeric
MULTI-USE MATERIAL

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1/4" + Relief		

ElastoSpec^{tm} 100% Solid Urethane
BONDED TO 3/4" PLYWOOD

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1-1/8" + Relief		

Call for ThermoSpec^{tm} Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available
ElastoSpec^{tm} Customized Panel Sizes and Art Panels

Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460


Spec Formliners, Inc.


Impressive on Concrete

Pattern Number: **1553**

Cut Ashlar

3/4" (19mm) mortar joint
Up to 30" stones

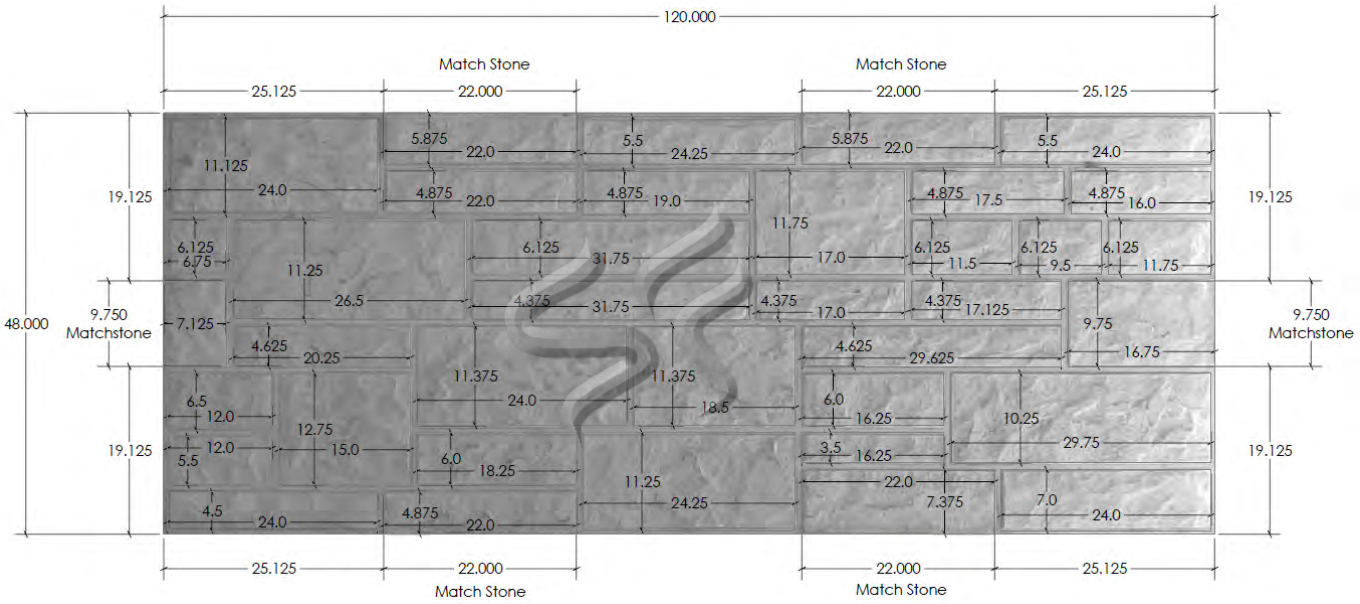

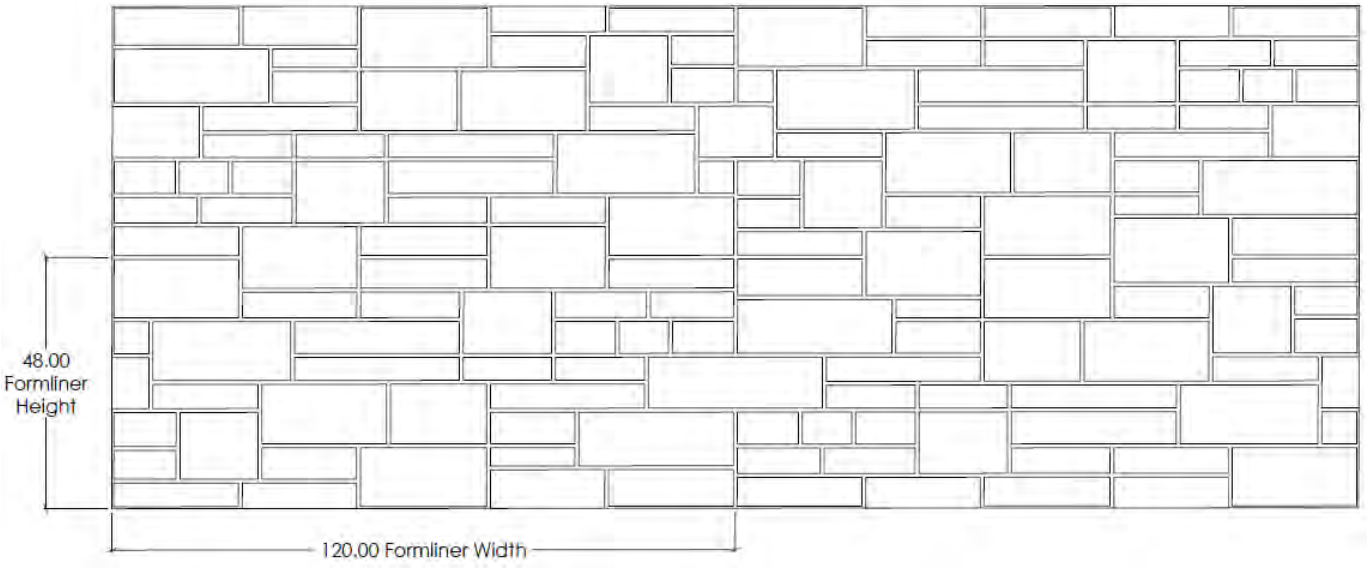

Note: Panels match top and bottom, side to side and rotated180°.


Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460

Spec Formliners, Inc.
Impressive on Concrete

Pattern Number: **1555**

Navasota Ashlar Stone

1-5/8" (41mm) maximum depth
Various sized stones to 30"

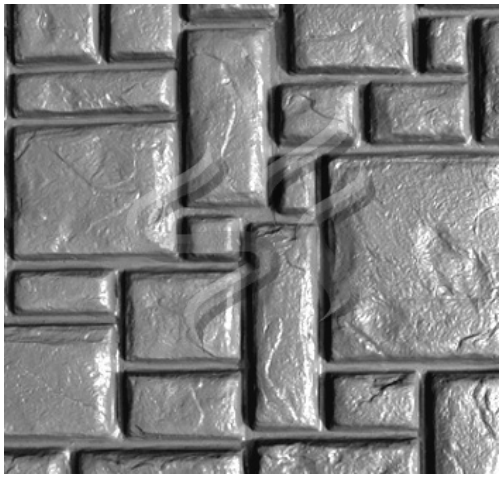

CONCRETE



Visit **www.specformliners.com** for application guides and technical information

ThermoSpec^{tm}
SINGLE OR MULTI-USE PLASTIC

Property	HIPS	ABS
Tensile D638	3700	5300
IFlexural D7905	-	9300
Hardness D786	-	105
Material Weights - lbs/ft^2		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843
Thicknesses Available		
0.070, 0.090, 0.110, 0.145, 0.155, 0.180		

ElastoSpec Lite^{tm} Semi-Elastomeric
MULTI-USE MATERIAL

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1/4" + Relief		

ElastoSpec^{tm} 100% Solid Urethane
BONDED TO 3/4" PLYWOOD

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1-1/8" + Relief		

Call for ThermoSpec^{tm} Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available
ElastoSpec^{tm} Customized Panel Sizes and Art Panels


Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460

Spec Formliners, Inc.
Impressive on Concrete


Pattern Number: **1556**

Franklin Aged Ashlar

3/4" (19mm) maximum relief
8" to 24" stone sizes

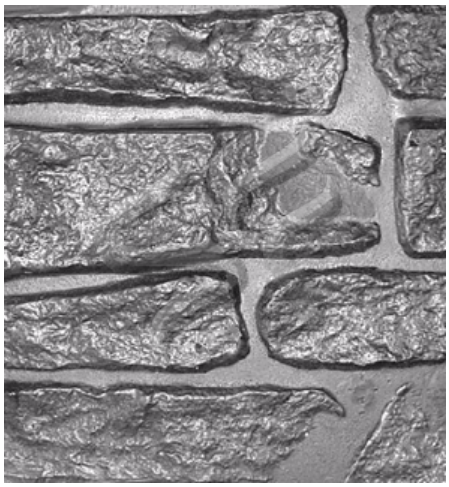

CONCRETE

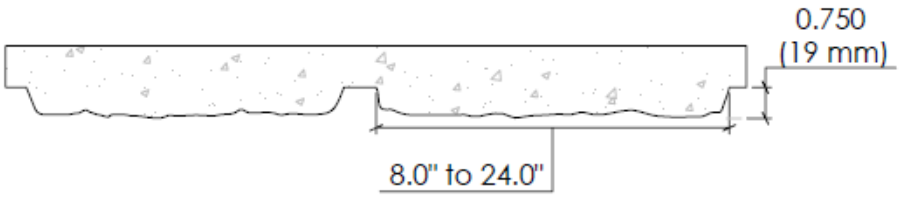

Visit **www.specformliners.com** for application guides and technical information

ThermoSpec[tm]
SINGLE OR MULTI-USE PLASTIC

Property	HIPS	ABS
Tensile D638	3700	5300
IFlexural D7905	-	9300
Hardness D786	-	105
Material Weights - lbs/ft²		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843
Thicknesses Available		
0.070, 0.090, 0.110, 0.145, 0.155, 0.180		

ElastoSpec Lite[tm] Semi-Elastomeric
MULTI-USE MATERIAL

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
Material Weights - lbs/ft²		
Varies by Pattern		
Maximum Thickness		
1/4" + Relief		

ElastoSpec[tm] 100% Solid Urethane
BONDED TO 3/4" PLYWOOD

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft²		
Varies by Pattern		
Maximum Thickness		
1-1/8" + Relief		

Call for ThermoSpec[tm] Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available
ElastoSpec[tm] Customized Panel Sizes and Art Panels

Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460

Spec Formliners, Inc.
Impressive on Concrete


Pattern Number: **1556**

Franklin Aged Ashlar

3/4" (19mm) maximum relief
8" to 24" stone sizes



***Actual Stone Layout may differ from drawing.**

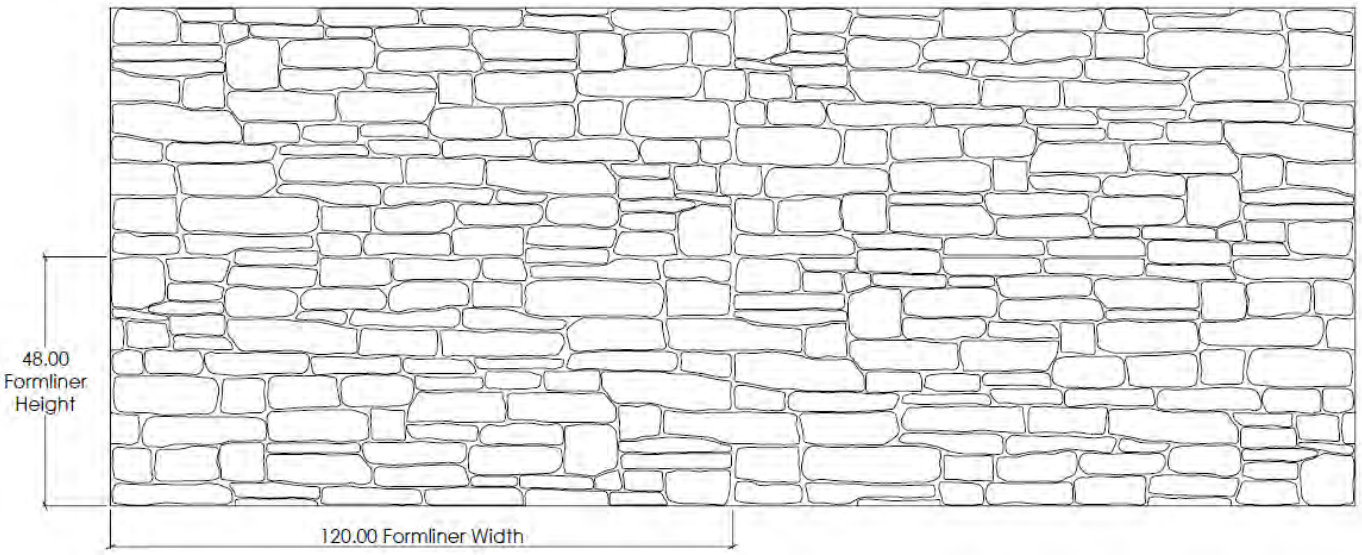

Note: Panels match top and bottom, side to side and rotated180°.


Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460


Spec Formliners, Inc.
Impressive on Concrete

Pattern Number: **1558**

Liberty Dry Stack

1-3/8" (35mm) maximum relief
3" to 24" maximum stone size

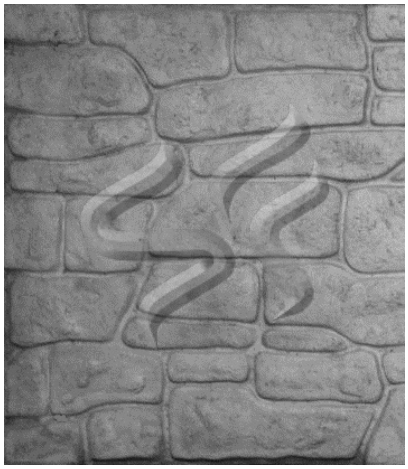

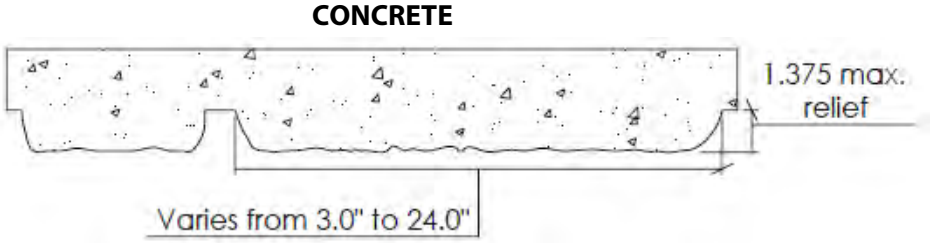

Visit **www.specformliners.com** for application guides and technical information

ThermoSpec^{tm}
SINGLE OR MULTI-USE PLASTIC

Property	HIPS	ABS
Tensile D638	3700	5300
IFlexural D7905	-	9300
Hardness D786	-	105
Material Weights - lbs/ft^2		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843
Thicknesses Available		
0.070, 0.090, 0.110, 0.145, 0.155, 0.180		

ElastoSpec Lite^{tm} Semi-Elastomeric
MULTI-USE MATERIAL

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1/4" + Relief		

ElastoSpec^{tm} 100% Solid Urethane
BONDED TO 3/4" PLYWOOD

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1-1/8" + Relief		

Call for ThermoSpec^{tm} Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available
ElastoSpec^{tm} Customized Panel Sizes and Art Panels


Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460


Spec Formliners, Inc.
Impressive on Concrete

Pattern Number: **1558**

Liberty Dry Stack

1-3/8" (35mm) maximum relief
3" to 24" maximum stone size

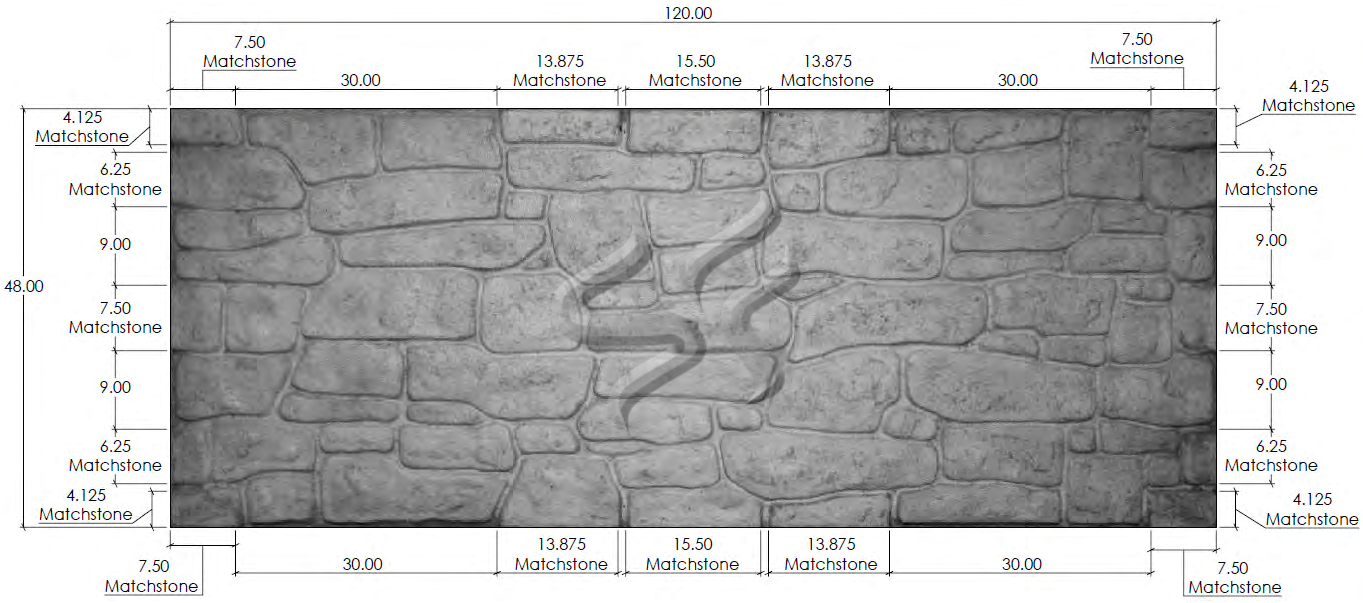

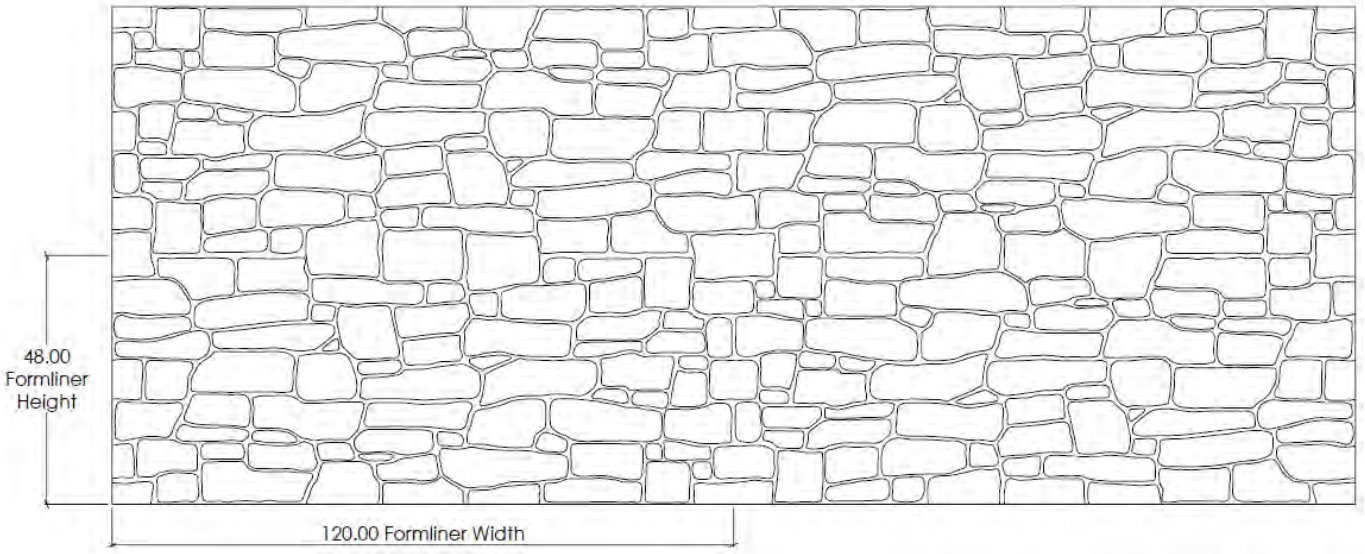

Note: Panels match top and bottom, side to side and rotated180°.

Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460


Spec Formliners, Inc.
Impressive on Concrete

Pattern Number: **1570**

Klamath Dry Stack

2-1/4" (57mm) maximum relief
3" to 24" typical stone size



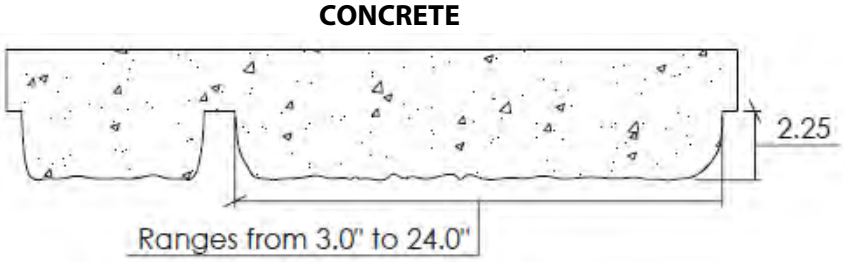

Visit **www.specformliners.com** for application guides and technical information

ThermoSpec[tm]
SINGLE OR MULTI-USE PLASTIC

Property	HIPS	ABS
Tensile D638	3700	5300
IFlexural D7905	-	9300
Hardness D786	-	105
Material Weights - lbs/ft²		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843
Thicknesses Available		
0.070, 0.090, 0.110, 0.145, 0.155, 0.180		

ElastoSpec Lite[tm] Semi-Elastomeric
MULTI-USE MATERIAL

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
Material Weights - lbs/ft²		
Varies by Pattern		
Maximum Thickness		
1/4" + Relief		

ElastoSpec[tm] 100% Solid Urethane
BONDED TO 3/4" PLYWOOD

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft²		
Varies by Pattern		
Maximum Thickness		
1-1/8" + Relief		

Call for ThermoSpec[tm] Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available
ElastoSpec[tm] Customized Panel Sizes and Art Panels


Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460


Spec Formliners, Inc.
Impressive on Concrete

Pattern Number: **1570**

Klamath Dry Stack

2-1/4" (57mm) maximum relief
3" to 24" typical stone size

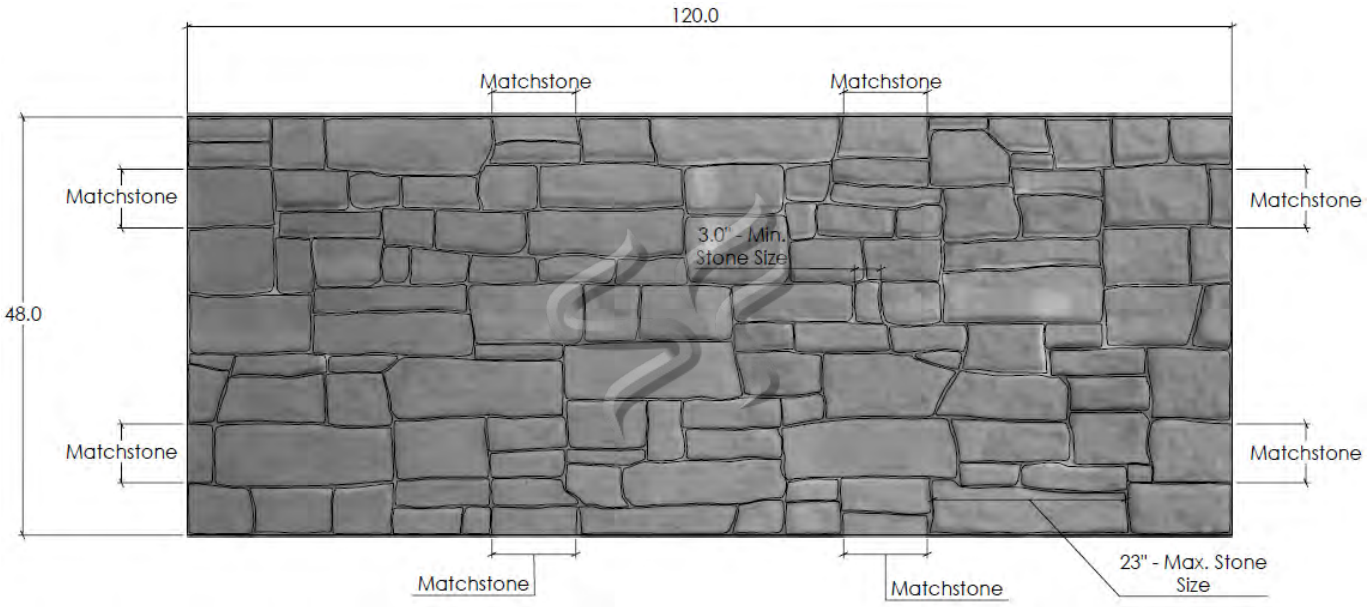

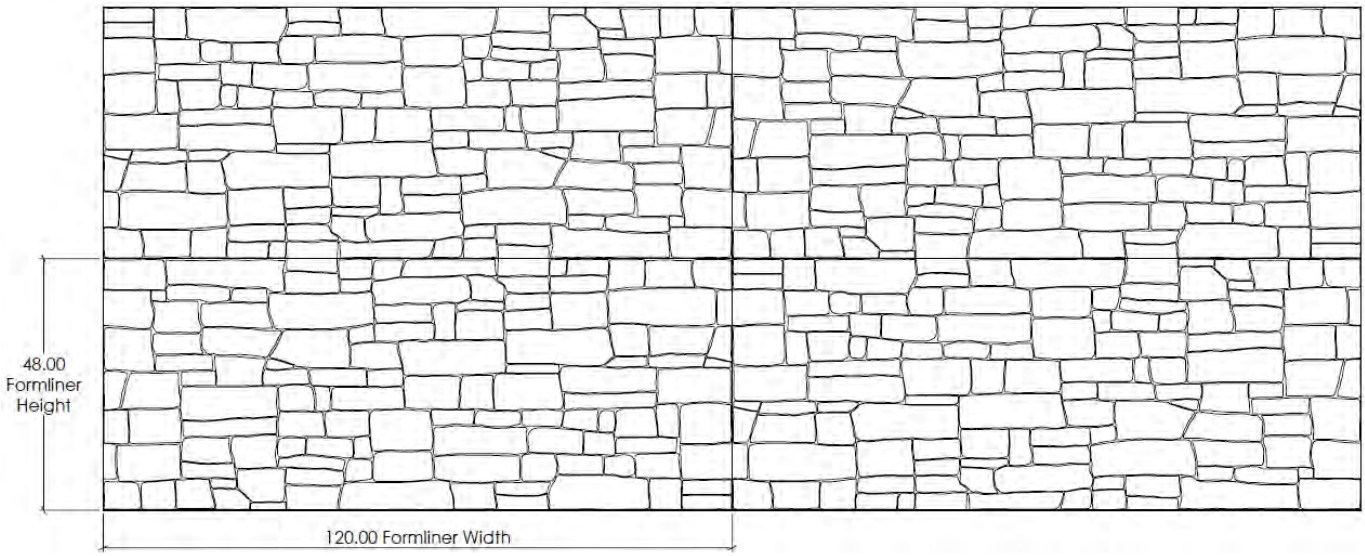

Note: Panels match top and bottom, side to side and rotated180°.


Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460

Spec Formliners, Inc.
Impressive on Concrete


Pattern Number: **1572**

Ashlar Cobblestone

1/2" (12mm) maximum relief
4" to 7" irregular stones
1/4" to 1/2" mortar joint

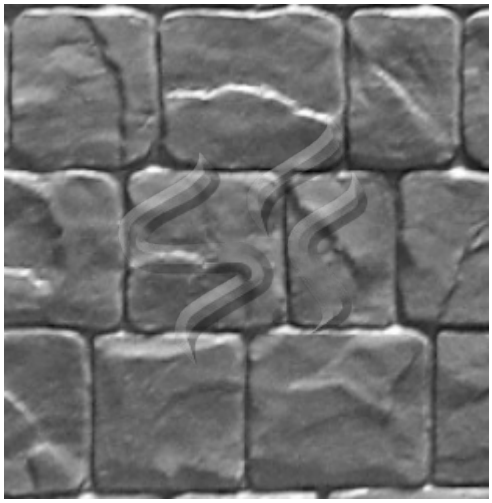

CONCRETE

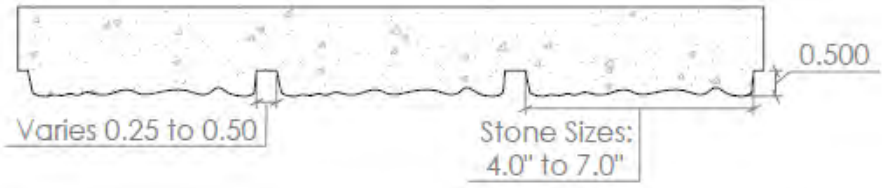

Visit **www.specformliners.com** for application guides and technical information

ThermoSpec[tm]
SINGLE OR MULTI-USE PLASTIC

Property	HIPS	ABS
Tensile D638	3700	5300
IFlexural D7905	-	9300
Hardness D786	-	105
Material Weights - lbs/ft²		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843
Thicknesses Available		
0.070, 0.090, 0.110, 0.145, 0.155, 0.180		

ElastoSpec Lite[tm] Semi-Elastomeric
MULTI-USE MATERIAL

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
Material Weights - lbs/ft²		
Varies by Pattern		
Maximum Thickness		
1/4" + Relief		

ElastoSpec[tm] 100% Solid Urethane
BONDED TO 3/4" PLYWOOD

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft²		
Varies by Pattern		
Maximum Thickness		
1-1/8" + Relief		

Call for ThermoSpec[tm] Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available
ElastoSpec[tm] Customized Panel Sizes and Art Panels

Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460

Spec Formliners, Inc.


Impressive on Concrete

Pattern Number: **1572**

Ashlar Cobblestone

1/2" (12mm) maximum relief
4" to 7" irregular stones
1/4" to 1/2" mortar joint



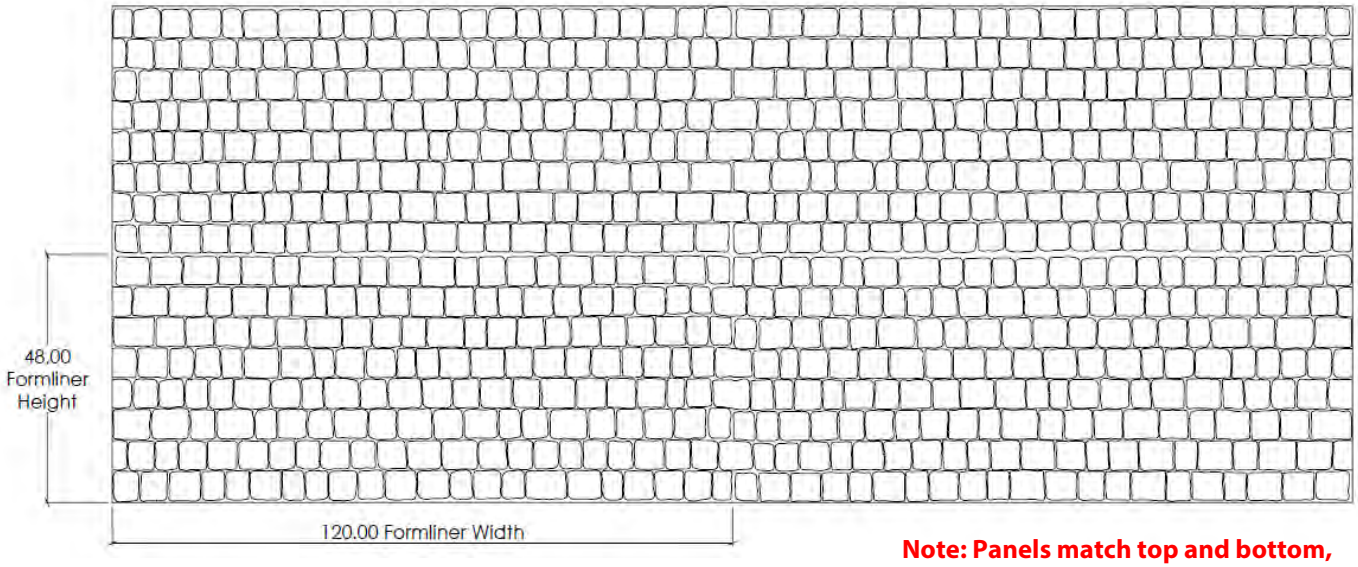

Note: Panels match top and bottom, side to side and rotated180°.

Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460


Spec Formliners, Inc.
Impressive on Concrete

Pattern Number: **1573**

Independence Ashlar

1-1/2" (38mm) maximum relief
Deep chisel cut stone
Sand texture mortar joint
Stone sizes to 36"



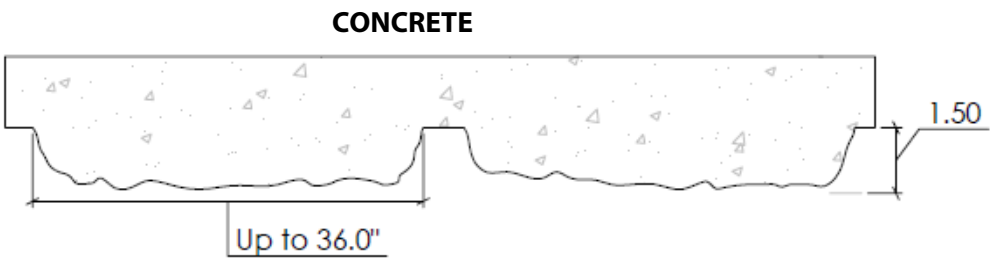

Visit **www.specformliners.com** for application guides and technical information

ThermoSpec^{tm}
SINGLE OR MULTI-USE PLASTIC

Property	HIPS	ABS
Tensile D638	3700	5300
IFlexural D7905	-	9300
Hardness D786	-	105
Material Weights - lbs/ft^2		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843
Thicknesses Available		
0.070, 0.090, 0.110, 0.145, 0.155, 0.180		

ElastoSpec Lite^{tm} Semi-Elastomeric
MULTI-USE MATERIAL

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1/4" + Relief		

ElastoSpec^{tm} 100% Solid Urethane
BONDED TO 3/4" PLYWOOD

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1-1/8" + Relief		

Call for ThermoSpec^{tm} Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available
ElastoSpec^{tm} Customized Panel Sizes and Art Panels


Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460


Spec Formliners, Inc.
Impressive on Concrete

Pattern Number: **1573**

Independence Ashlar

1-1/2" (38mm) maximum relief
Deep chisel cut stone
Sand texture mortar joint
Stone sizes to 36"

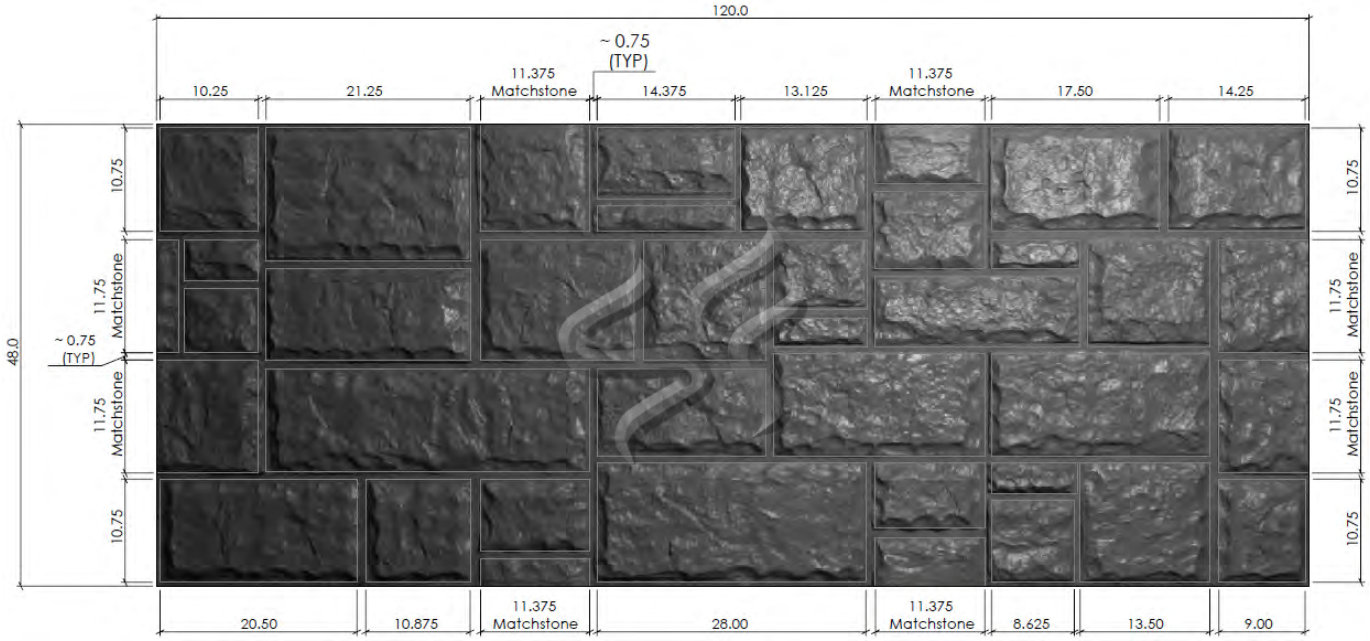

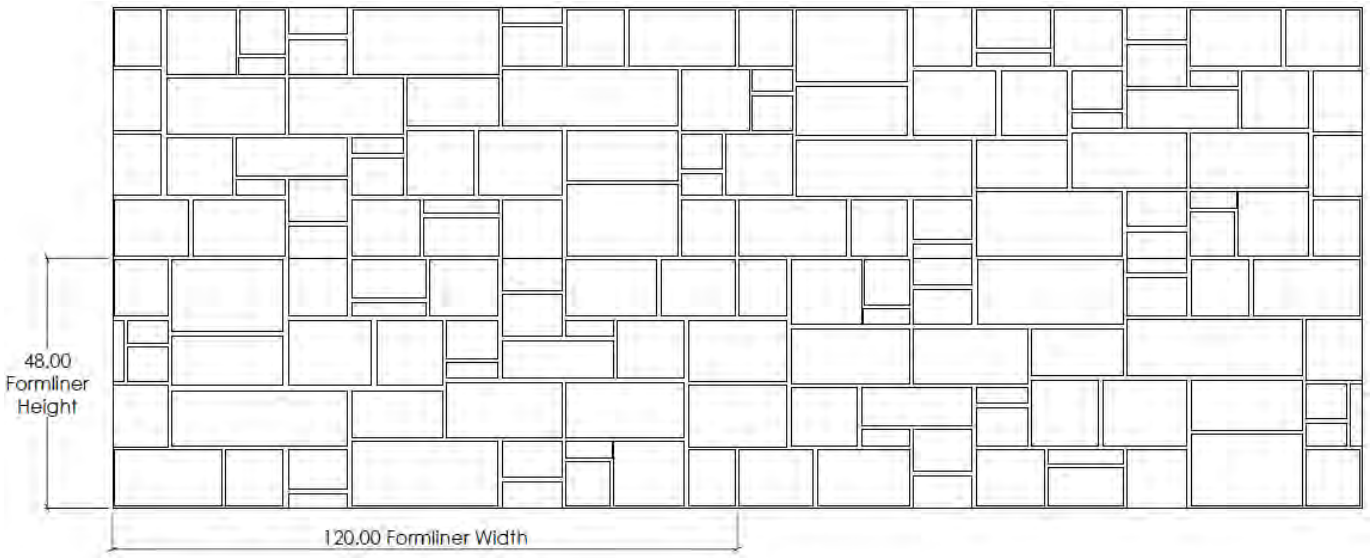

Note: Panels match top and bottom, side to side and rotated180°.

Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460

Spec Formliners, Inc.
Impressive on Concrete


Pattern Number: **1577**

Random Cobblestone

Rock sizes 3” to 8”
Maximum depth 1-1/2”
3/4” max mortar joint



CONCRETE

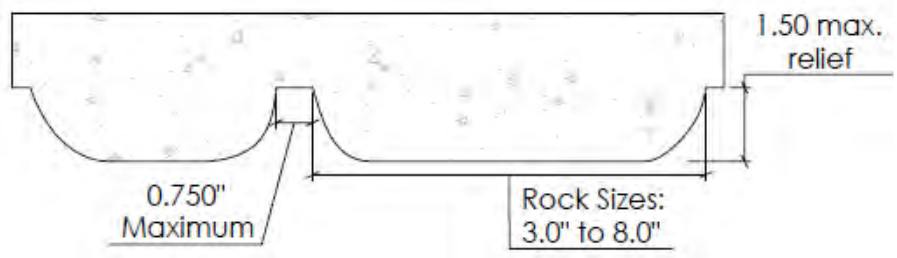

Visit **www.specformliners.com** for application guides and technical information

ThermoSpec^{tm}
SINGLE OR MULTI-USE PLASTIC

Property	HIPS	ABS
Tensile D638	3700	5300
IFlexural D7905	-	9300
Hardness D786	-	105
Material Weights - lbs/ft^2		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843
Thicknesses Available		
0.070, 0.090, 0.110, 0.145, 0.155, 0.180		

ElastoSpec Lite^{tm} Semi-Elastomeric
MULTI-USE MATERIAL

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1/4" + Relief		

ElastoSpec^{tm} 100% Solid Urethane
BONDED TO 3/4” PLYWOOD

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1-1/8" + Relief		

Call for ThermoSpec^{tm} Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available
ElastoSpec^{tm} Customized Panel Sizes and Art Panels


Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460


Spec Formliners, Inc.
Impressive on Concrete

Pattern Number: **1577**

Random Cobblestone

Rock sizes 3” to 8”
Maximum depth 1-1/2”
3/4” max mortar joint

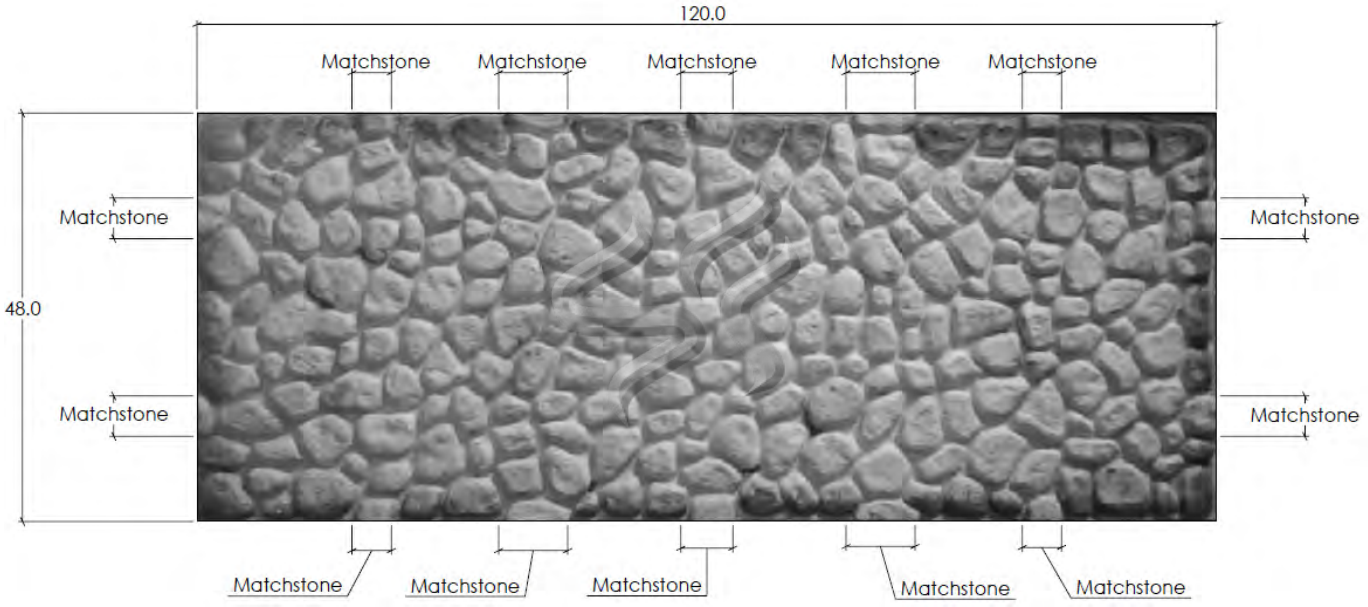

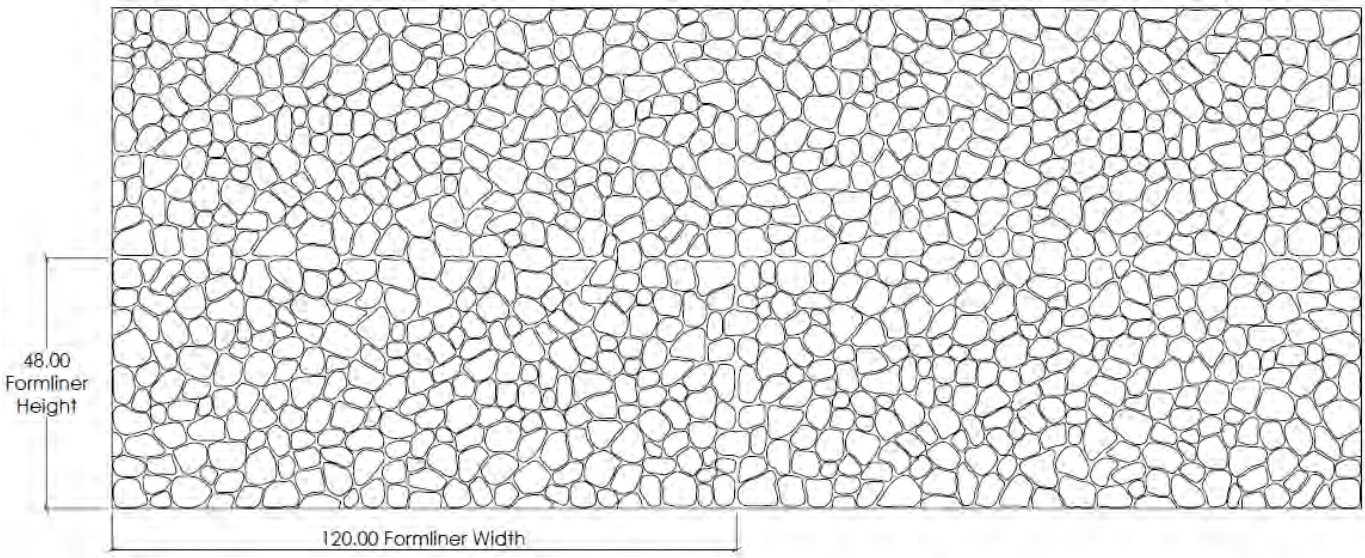

Note: Panels match top and bottom, side to side and rotated180°.

Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460


Spec Formliners, Inc.
Impressive on Concrete

Pattern Number: **1579**

Summit Rock

Rock sizes 3" x 5" to 9" x 18"
Maximum depth 1"
3/4" max mortar joint



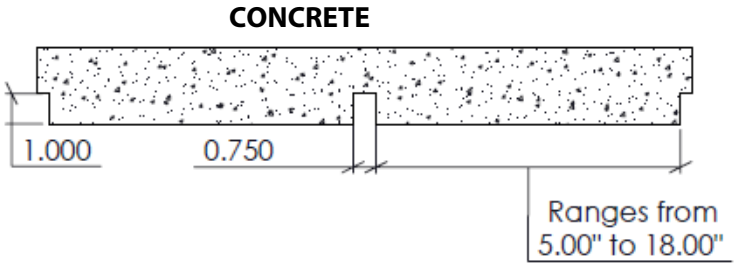

Visit **www.specformliners.com** for application guides and technical information

ThermoSpec[tm]
SINGLE OR MULTI-USE PLASTIC

Property	HIPS	ABS
Tensile D638	3700	5300
IFlexural D7905	-	9300
Hardness D786	-	105
Material Weights - lbs/ft²		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843
Thicknesses Available		
0.070, 0.090, 0.110, 0.145, 0.155, 0.180		

ElastoSpec Lite[tm] Semi-Elastomeric
MULTI-USE MATERIAL

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
Material Weights - lbs/ft²		
Varies by Pattern		
Maximum Thickness		
1/4" + Relief		

ElastoSpec[tm] 100% Solid Urethane
BONDED TO 3/4" PLYWOOD

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft²		
Varies by Pattern		
Maximum Thickness		
1-1/8" + Relief		

Call for ThermoSpec[tm] Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available
ElastoSpec[tm] Customized Panel Sizes and Art Panels

Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460


Spec Formliners, Inc.


Impressive on Concrete

Pattern Number: **1579**

Summit Rock

Rock sizes 3” x 5” to 9” x 18”
Maximum depth 1”
3/4” max mortar joint

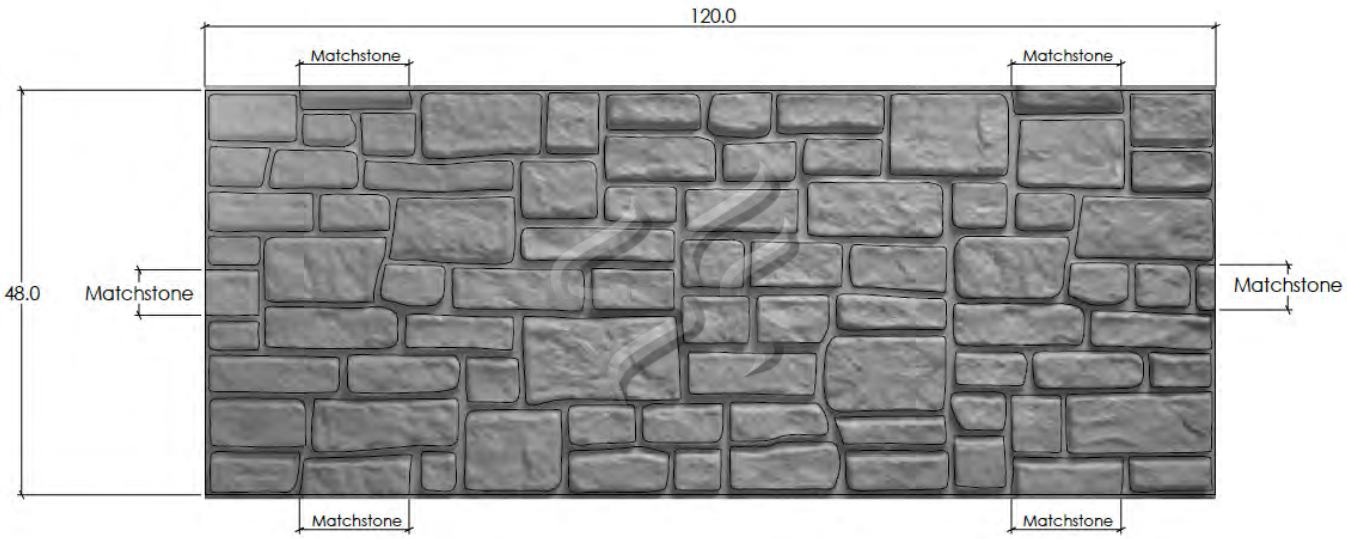

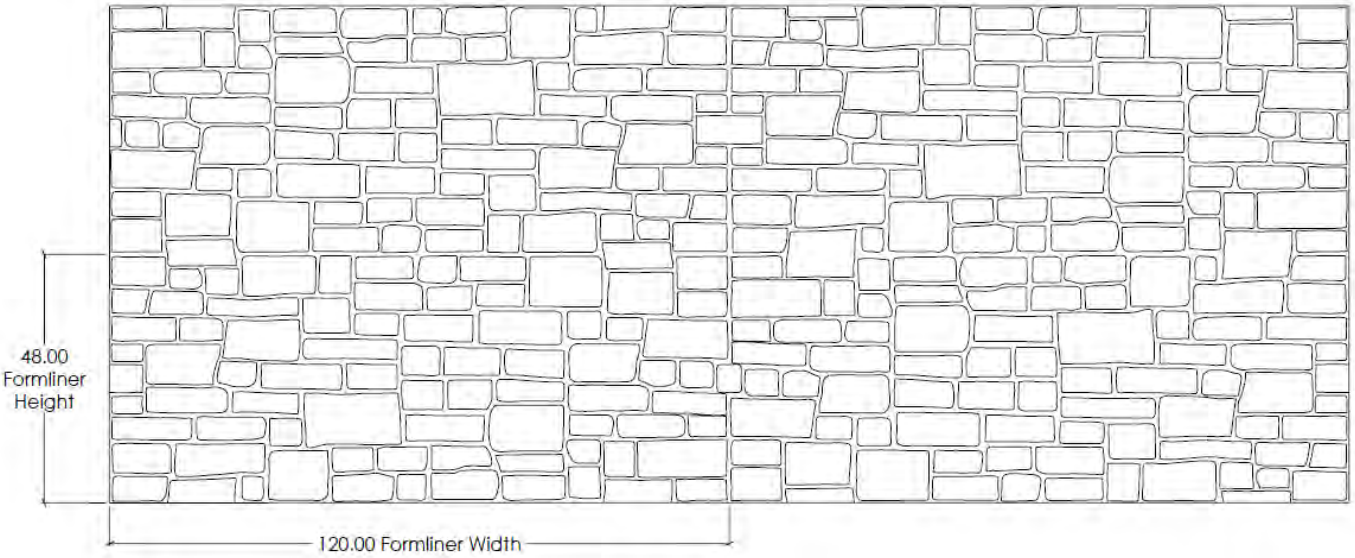

Note: Panels match top and bottom, side to side and rotated180°.

Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460

Spec Formliners, Inc.
Impressive on Concrete


Pattern Number: **1580**

Lincoln Dry Stack

Deep Random Sized Stones 4" to 30" stone sizes, random small filler stones



CONCRETE

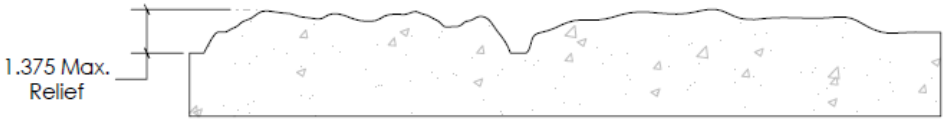

Visit **www.specformliners.com** for application guides and technical information

ThermoSpec^{tm}
SINGLE OR MULTI-USE PLASTIC

Property	HIPS	ABS
Tensile D638	3700	5300
IFlexural D7905	-	9300
Hardness D786	-	105
Material Weights - lbs/ft^2		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843
Thicknesses Available		
0.070, 0.090, 0.110, 0.145, 0.155, 0.180		

ElastoSpec Lite^{tm} Semi-Elastomeric
MULTI-USE MATERIAL

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1/4" + Relief		

ElastoSpec^{tm} 100% Solid Urethane
BONDED TO 3/4" PLYWOOD

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1-1/8" + Relief		

Call for ThermoSpec^{tm} Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available
ElastoSpec^{tm} Customized Panel Sizes and Art Panels


Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460


Spec Formliners, Inc.
Impressive on Concrete

Pattern Number: **1580**

Lincoln Dry Stack

Deep Random Sized Stones 4" to 30" stone sizes, random small filler stones

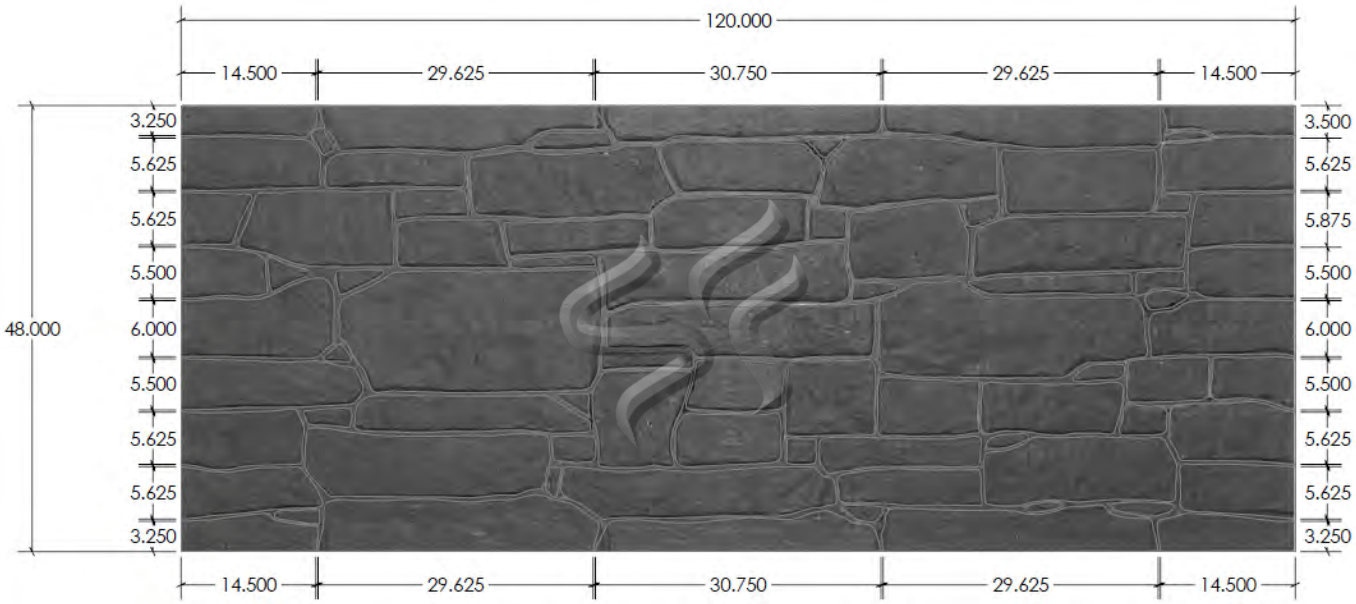

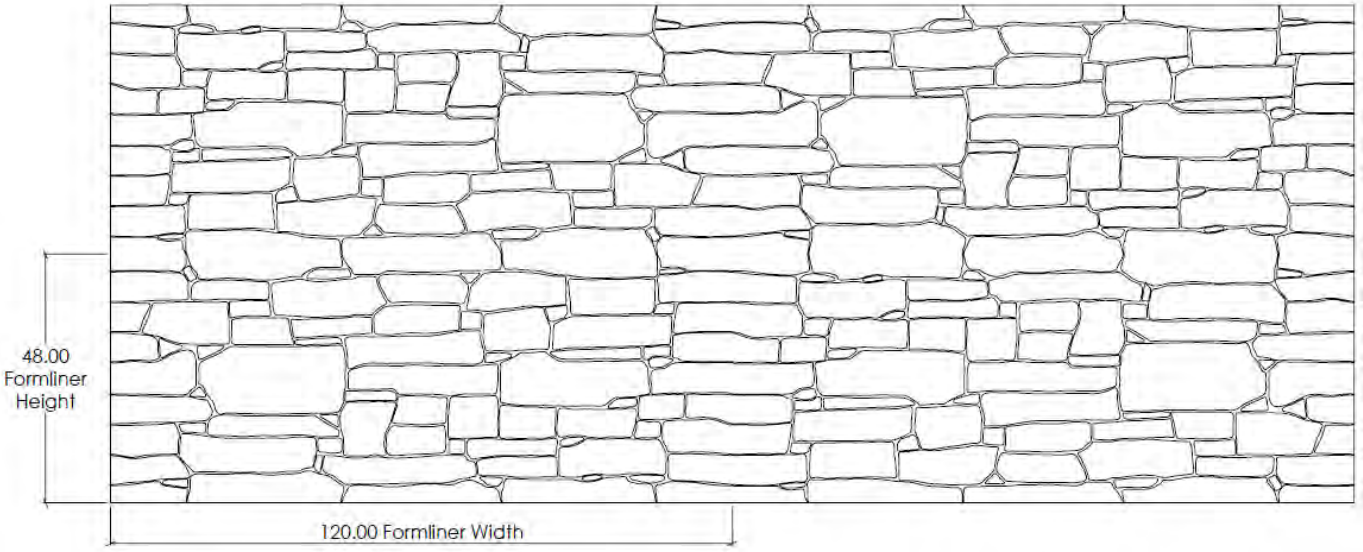

Note: Panels match top and bottom, side to side and rotated180°.

Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460


Spec Formliners, Inc.
Impressive on Concrete

Pattern Number: **1581**

Washington Dry Stack

1-1/2" Deep Random Sized Stones
4" to 24" stone sizes



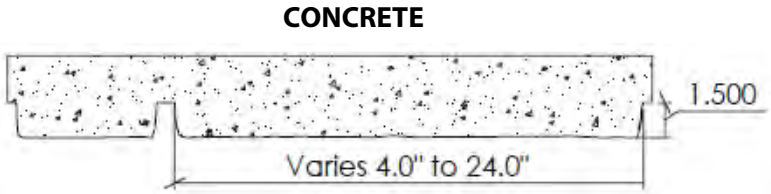

Visit **www.specformliners.com** for application guides and technical information

ThermoSpec^{tm}
SINGLE OR MULTI-USE PLASTIC

Property	HIPS	ABS
Tensile D638	3700	5300
IFlexural D7905	-	9300
Hardness D786	-	105
Material Weights - lbs/ft^2		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843
Thicknesses Available		
0.070, 0.090, 0.110, 0.145, 0.155, 0.180		

ElastoSpec Lite^{tm} Semi-Elastomeric
MULTI-USE MATERIAL

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1/4" + Relief		

ElastoSpec^{tm} 100% Solid Urethane
BONDED TO 3/4" PLYWOOD

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1-1/8" + Relief		

Call for ThermoSpec^{tm} Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available
ElastoSpec^{tm} Customized Panel Sizes and Art Panels

Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460

Spec Formliners, Inc.
Impressive on Concrete


Pattern Number: **1581**

Washington Dry Stack

1-1/2" Deep Random Sized Stones
4" to 24" stone sizes



Panels are available in 4'x8', 4'x10' and 4'x12'.
***Actual Stone Layout may differ from drawing.**

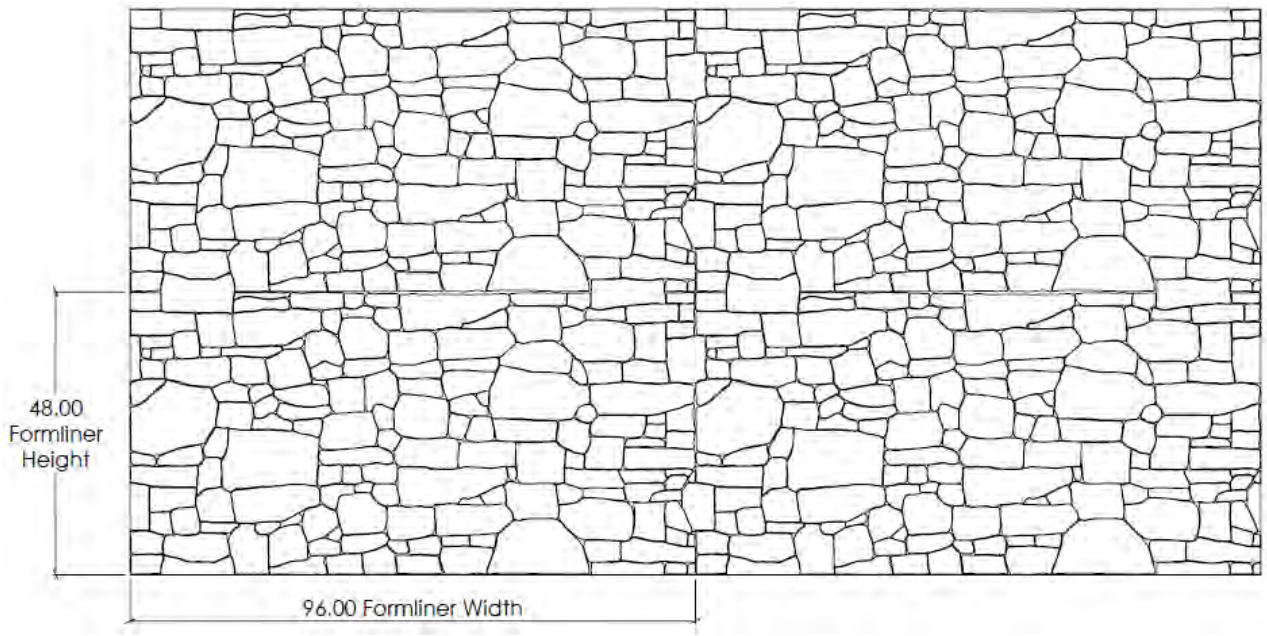

Note: Panels match top and bottom, side to side and rotated180°.


Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460

Spec Formliners, Inc.
Impressive on Concrete


Pattern Number: **1582**

Stone Ground Granite

1/2" (12mm) maximum relief
Same as 1513 Fractured Granite with surface ground down to 1/2" relief

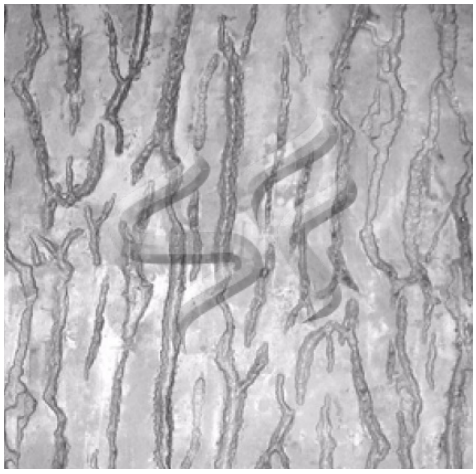

CONCRETE

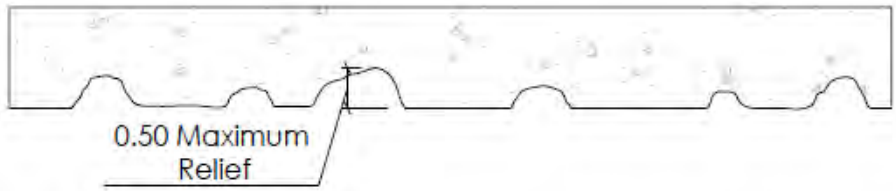

Visit **www.specformliners.com** for application guides and technical information

ThermoSpec[tm]
SINGLE OR MULTI-USE PLASTIC

Property	HIPS	ABS
Tensile D638	3700	5300
IFlexural D7905	-	9300
Hardness D786	-	105
Material Weights - lbs/ft²		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843
Thicknesses Available		
0.070, 0.090, 0.110, 0.145, 0.155, 0.180		

ElastoSpec Lite[tm] Semi-Elastomeric
MULTI-USE MATERIAL

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
Material Weights - lbs/ft²		
Varies by Pattern		
Maximum Thickness		
1/4" + Relief		

ElastoSpec[tm] 100% Solid Urethane
BONDED TO 3/4" PLYWOOD

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft²		
Varies by Pattern		
Maximum Thickness		
1-1/8" + Relief		

Call for ThermoSpec[tm] Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available
ElastoSpec[tm] Customized Panel Sizes and Art Panels


Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460

Spec Formliners, Inc.
Impressive on Concrete


Pattern Number: **1582**

Stone Ground Granite

1/2" (12mm) maximum relief
Same as 1513 Fractured Granite with surface ground down to 1/2" relief

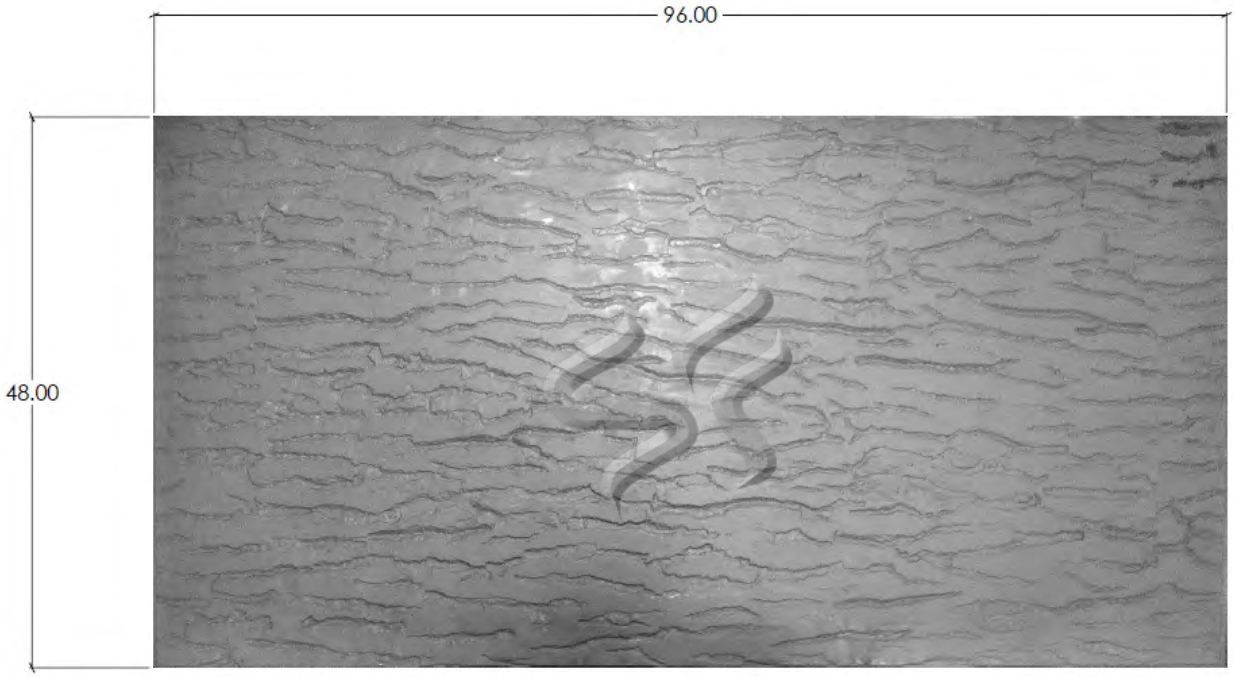

Panels are available in 4'x8'.

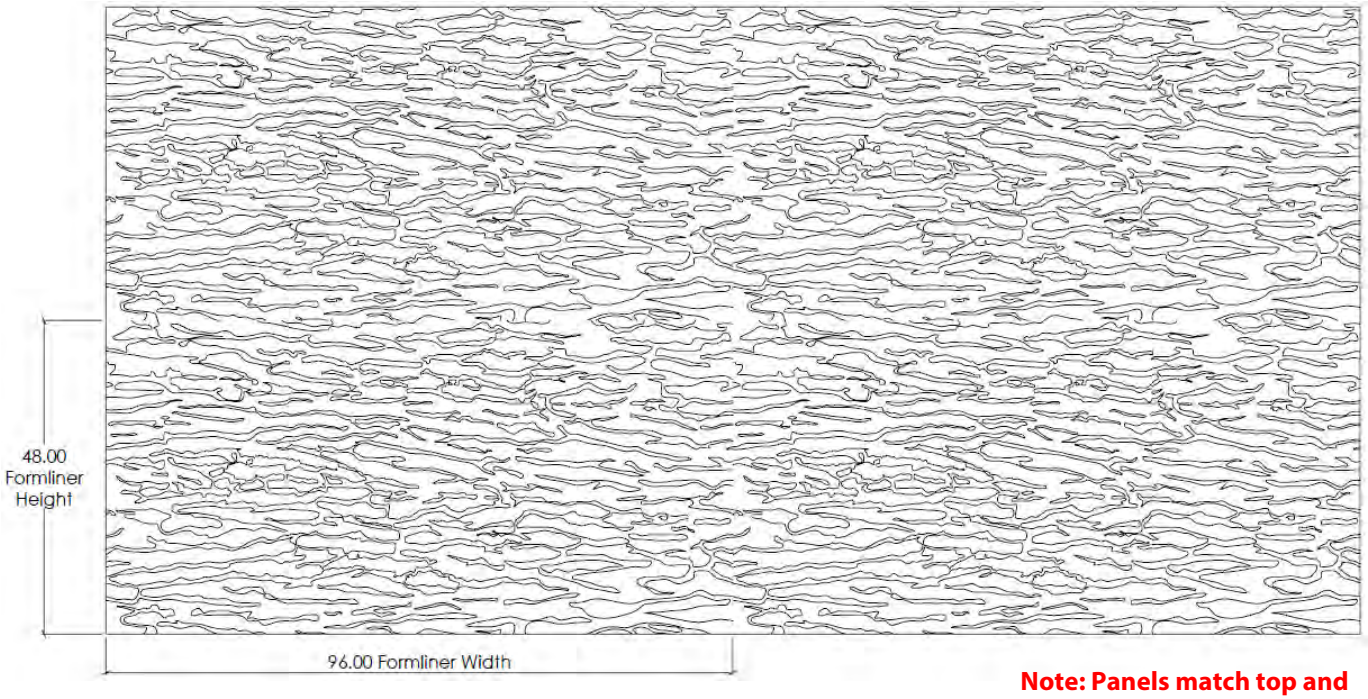

Note: Panels match top and bottom and side to side.


Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460

Spec Formliners, Inc.
Impressive on Concrete


Pattern Number: **1585**

Oneida Rectangular Stone

24" to 72" Stones, 24" Coursing
1-1/2" Depth, 1" Wide Mortar Joint

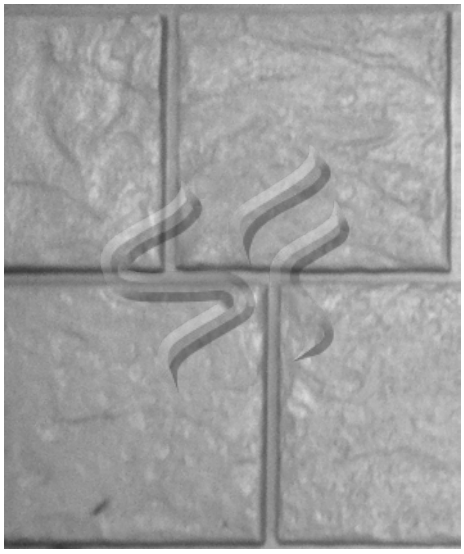

CONCRETE

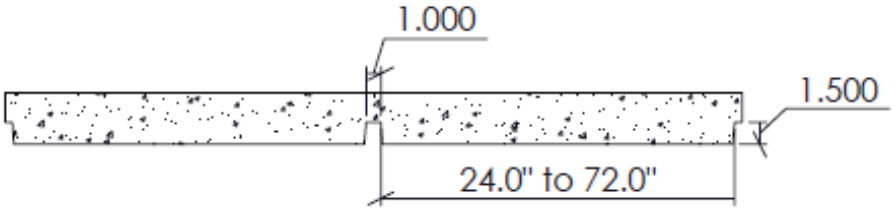

Visit **www.specformliners.com** for application guides and technical information

ThermoSpec^{tm}
SINGLE OR MULTI-USE PLASTIC

Property	HIPS	ABS
Tensile D638	3700	5300
IFlexural D7905	-	9300
Hardness D786	-	105
Material Weights - lbs/ft^2		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843
Thicknesses Available		
0.070, 0.090, 0.110, 0.145, 0.155, 0.180		

ElastoSpec Lite^{tm} Semi-Elastomeric
MULTI-USE MATERIAL

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1/4" + Relief		

ElastoSpec^{tm} 100% Solid Urethane
BONDED TO 3/4" PLYWOOD

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1-1/8" + Relief		

Call for ThermoSpec^{tm} Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available
ElastoSpec^{tm} Customized Panel Sizes and Art Panels

Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460


Spec Formliners, Inc.
Impressive on Concrete

Pattern Number: **1585**

Oneida Rectangular Stone

24" to 72" Stones, 24" Coursing
1-1/2" Depth, 1" Wide Mortar Joint



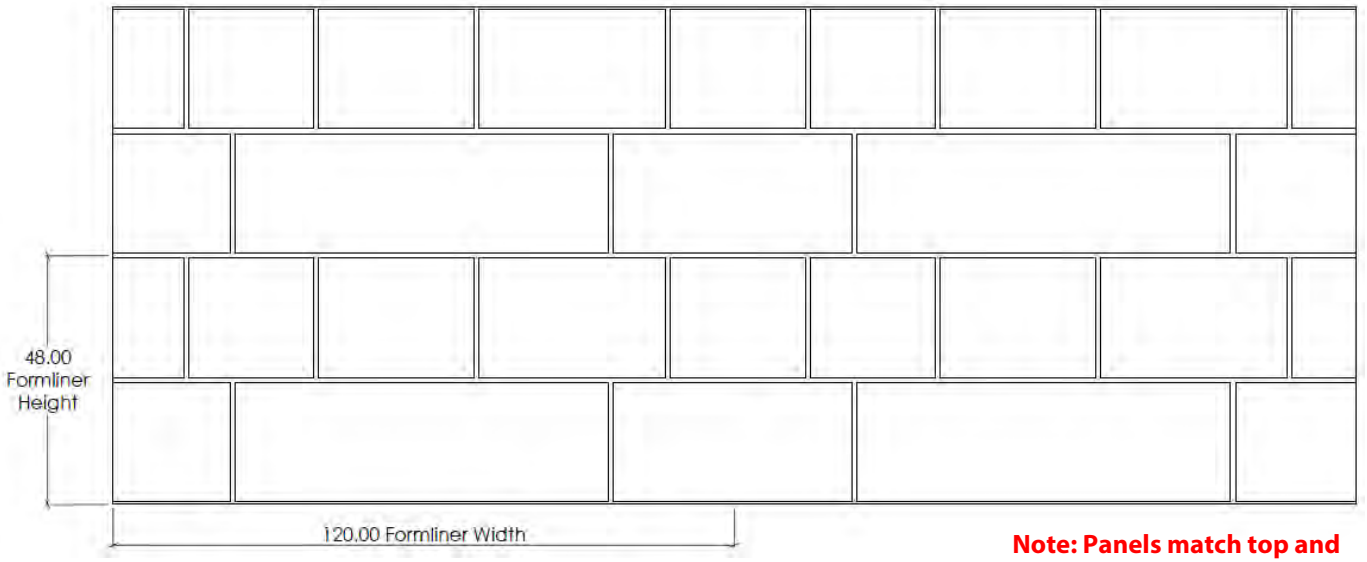

Note: Panels match top and bottom and side to side.

Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460


Spec Formliners, Inc.
Impressive on Concrete

Pattern Number: **1587A / B**

California Dry Stack


1-1/4" (32mm) depth - Stone sizes 3" to 24". - rotate and match points on all four sides. Also both patterns match



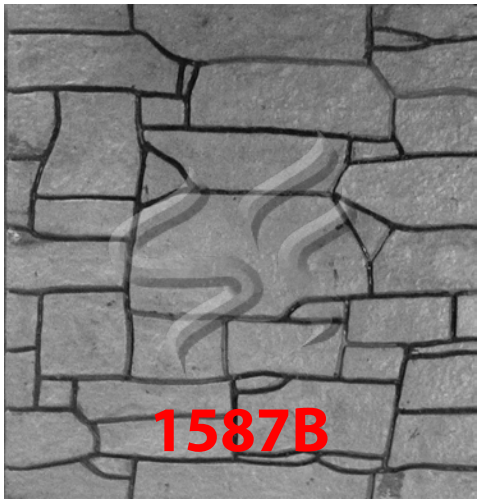

Two interchanging tools for extended random rock pattern layouts

CONCRETE

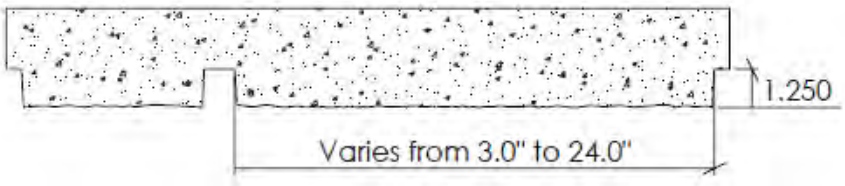

Visit **www.specformliners.com** for application guides and technical information

ThermoSpec^{tm}
SINGLE OR MULTI-USE PLASTIC

Property	HIPS	ABS
Tensile D638	3700	5300
IFlexural D7905	-	9300
Hardness D786	-	105
Material Weights - lbs/ft^2		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843
Thicknesses Available		
0.070, 0.090, 0.110, 0.145, 0.155, 0.180		

ElastoSpec Lite^{tm} Semi-Elastomeric
MULTI-USE MATERIAL

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1/4" + Relief		

ElastoSpec^{tm} 100% Solid Urethane
BONDED TO 3/4" PLYWOOD

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1-1/8" + Relief		

Call for ThermoSpec^{tm} Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available
ElastoSpec^{tm} Customized Panel Sizes and Art Panels


Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460


Spec Formliners, Inc.
Impressive on Concrete

Pattern Number: **1587A**

California Dry Stack

1-1/4" (32mm) depth - Stone sizes 3" to 24". - rotate and match points on all four sides. Also matches with pattern 1587B

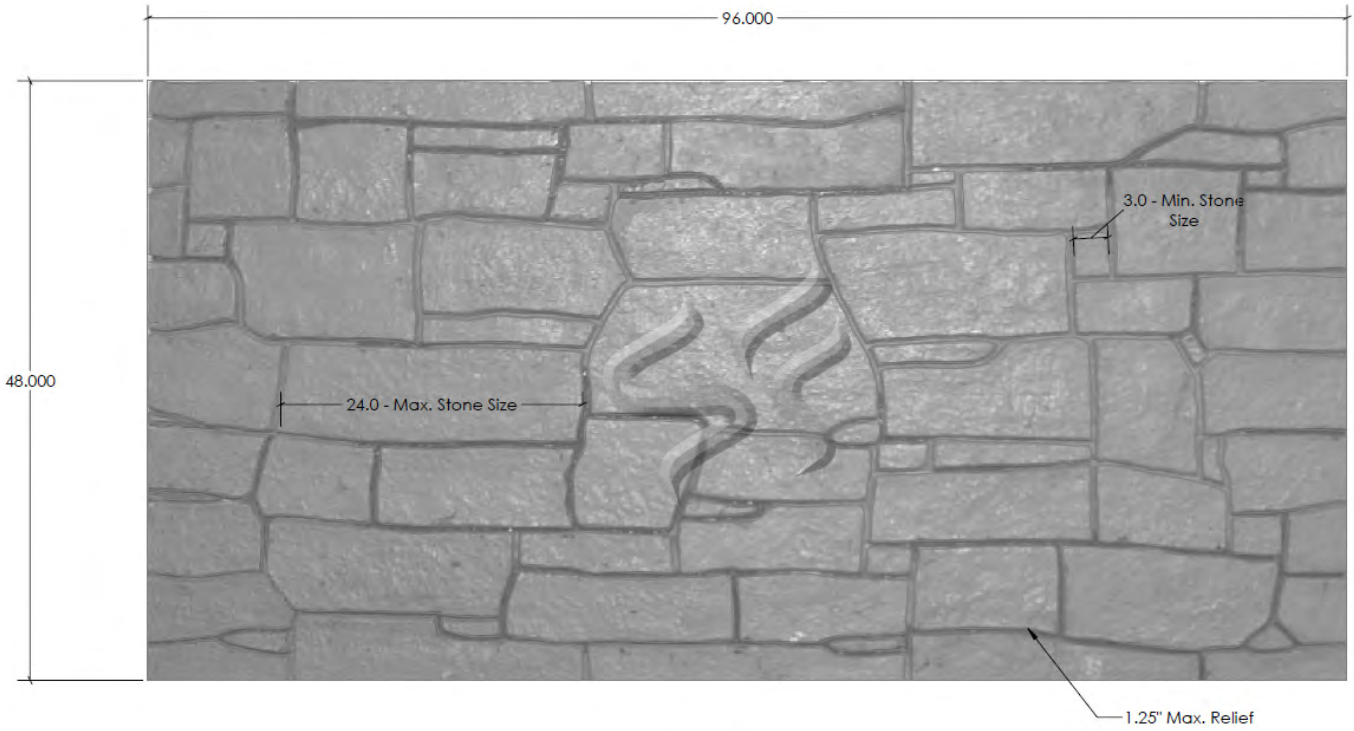

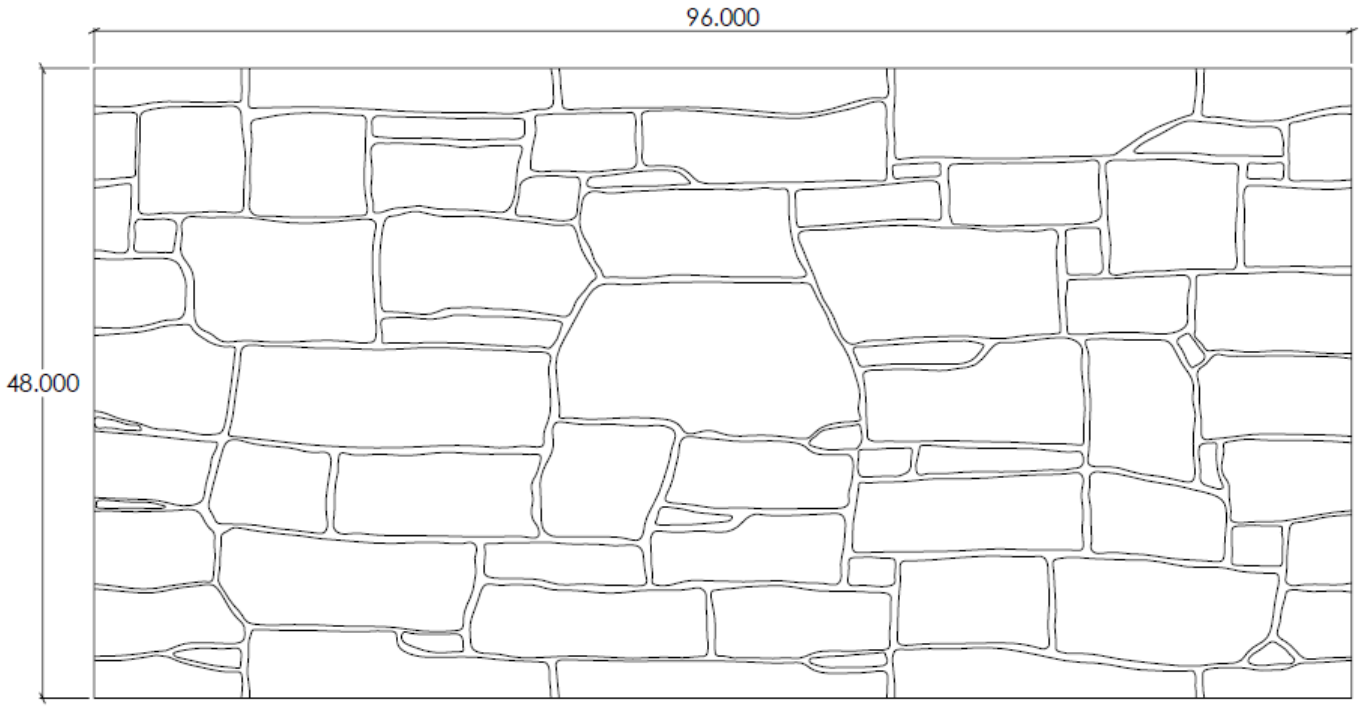

Note: Panels match top and bottom, side to side and rotated180°. *Panels also match with 1587B.

Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460


Spec Formliners, Inc.


Impressive on Concrete

Pattern Number: **1587B**

California Dry Stack

1-1/4" (32mm) depth - Stone sizes 3" to 24". - rotate and match points on all four sides. Also matches with pattern 1587A

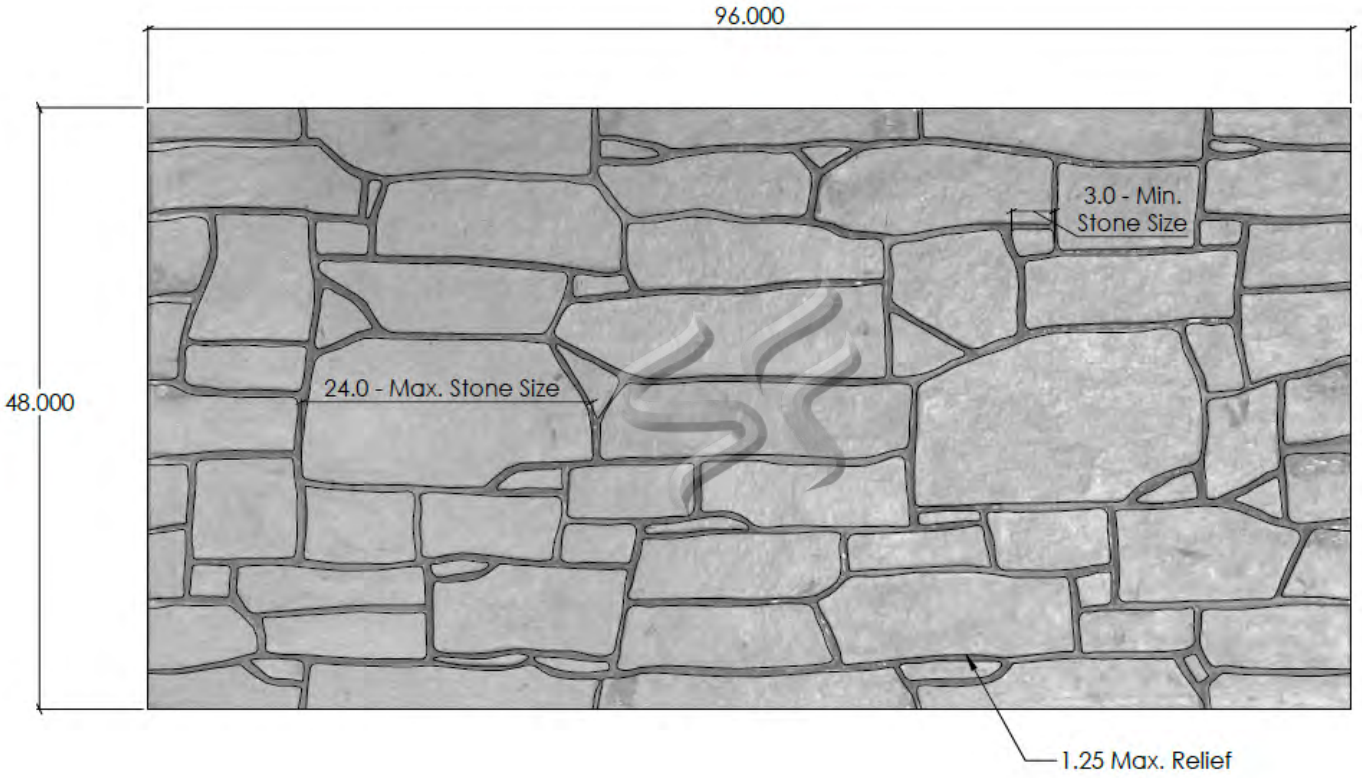

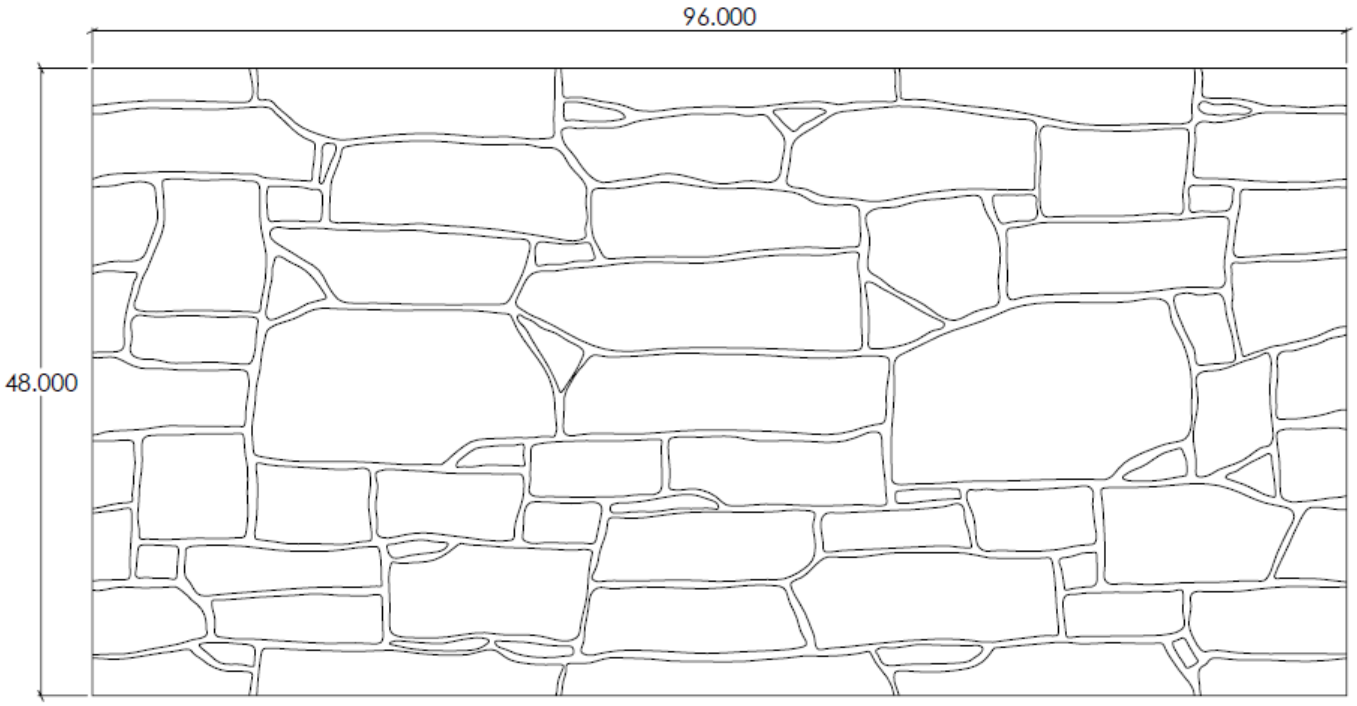

Note: Panels match top and bottom, side to side and rotated180°. *Panels also match with 1587A.


Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460


Spec Formliners, Inc.
Impressive on Concrete

Pattern Number: **5501**

American 12"x24" Stone

1-5/8" (41mm) relief
1" (25mm) mortar joint
11" H x 23" W stones
Stone Texture matches Pattern 1546

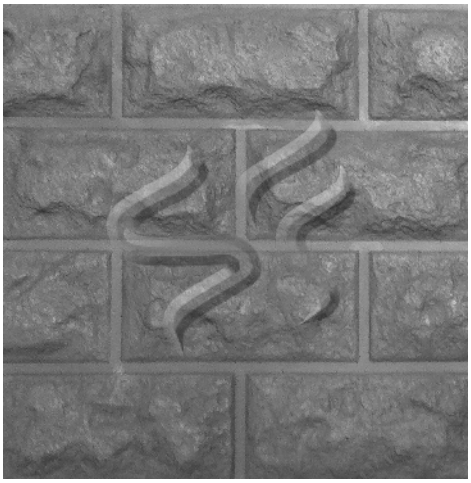

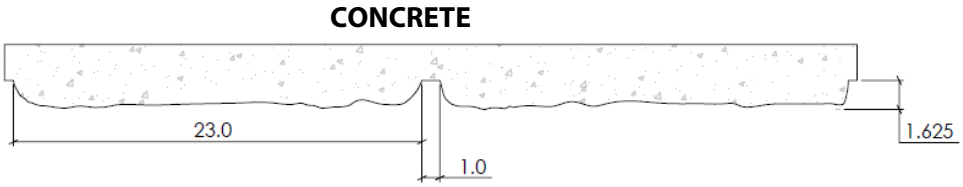

Visit **www.specformliners.com** for application guides and technical information

ThermoSpec^{tm}
SINGLE OR MULTI-USE PLASTIC

Property	HIPS	ABS
Tensile D638	3700	5300
IFlexural D7905	-	9300
Hardness D786	-	105
Material Weights - lbs/ft^2		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843
Thicknesses Available		
0.070, 0.090, 0.110, 0.145, 0.155, 0.180		

ElastoSpec Lite^{tm} Semi-Elastomeric
MULTI-USE MATERIAL

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1/4" + Relief		

ElastoSpec^{tm} 100% Solid Urethane
BONDED TO 3/4" PLYWOOD

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1-1/8" + Relief		

Call for ThermoSpec^{tm} Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available
ElastoSpec^{tm} Customized Panel Sizes and Art Panels

Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460

Spec Formliners, Inc.


Impressive on Concrete

Pattern Number: **5501**

American 12"x24" Stone

1-5/8" (41mm) relief
1" (25mm) mortar joint
11" H x 23" W stones
Stone Texture matches Pattern 1546



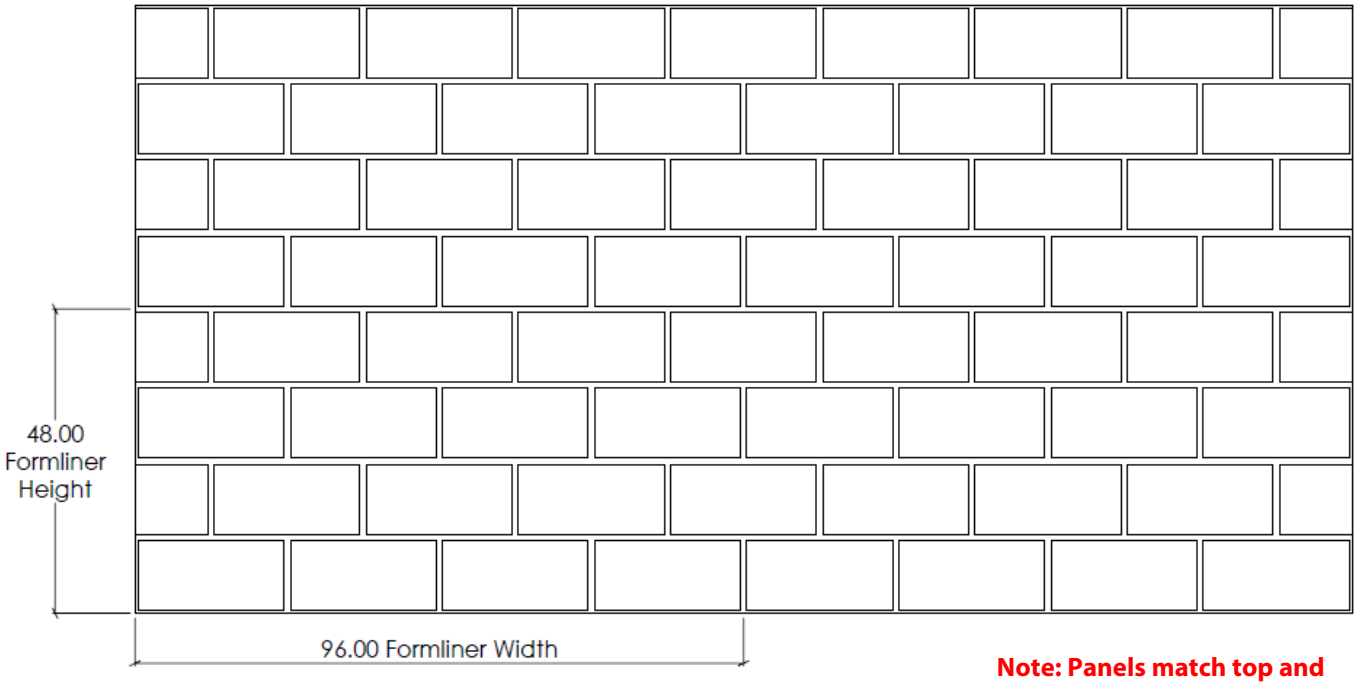

Note: Panels match top and bottom and side to side.


Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460


Spec Formliners, Inc.
Impressive on Concrete

Pattern Number: **5502**

American 24"x48" Stone

1-5/8" (41mm) relief
1" (25mm) mortar joint
23" H x 47" W stones
Stone Texture matches Pattern 1546

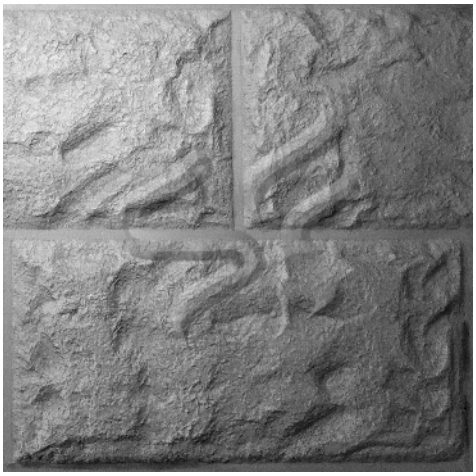

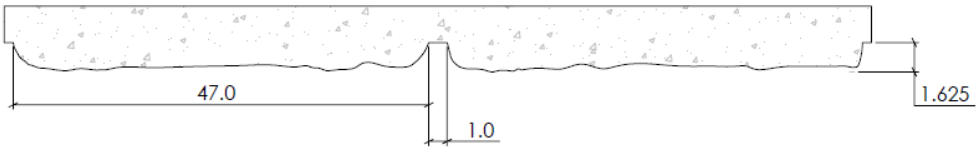

Visit **www.specformliners.com** for application guides and technical information

ThermoSpec^{tm}
SINGLE OR MULTI-USE PLASTIC

Property	HIPS	ABS
Tensile D638	3700	5300
IFlexural D7905	-	9300
Hardness D786	-	105
Material Weights - lbs/ft^2		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843
Thicknesses Available		
0.070, 0.090, 0.110, 0.145, 0.155, 0.180		

ElastoSpec Lite^{tm} Semi-Elastomeric
MULTI-USE MATERIAL

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1/4" + Relief		

ElastoSpec^{tm} 100% Solid Urethane
BONDED TO 3/4" PLYWOOD

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1-1/8" + Relief		

Call for ThermoSpec^{tm} Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available
ElastoSpec^{tm} Customized Panel Sizes and Art Panels


Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460


Spec Formliners, Inc.
Impressive on Concrete

Pattern Number: **5502**

American 24"x48" Stone

1-5/8" (41mm) relief
1" (25mm) mortar joint
23" H x 47" W stones
Stone Texture matches Pattern 1546

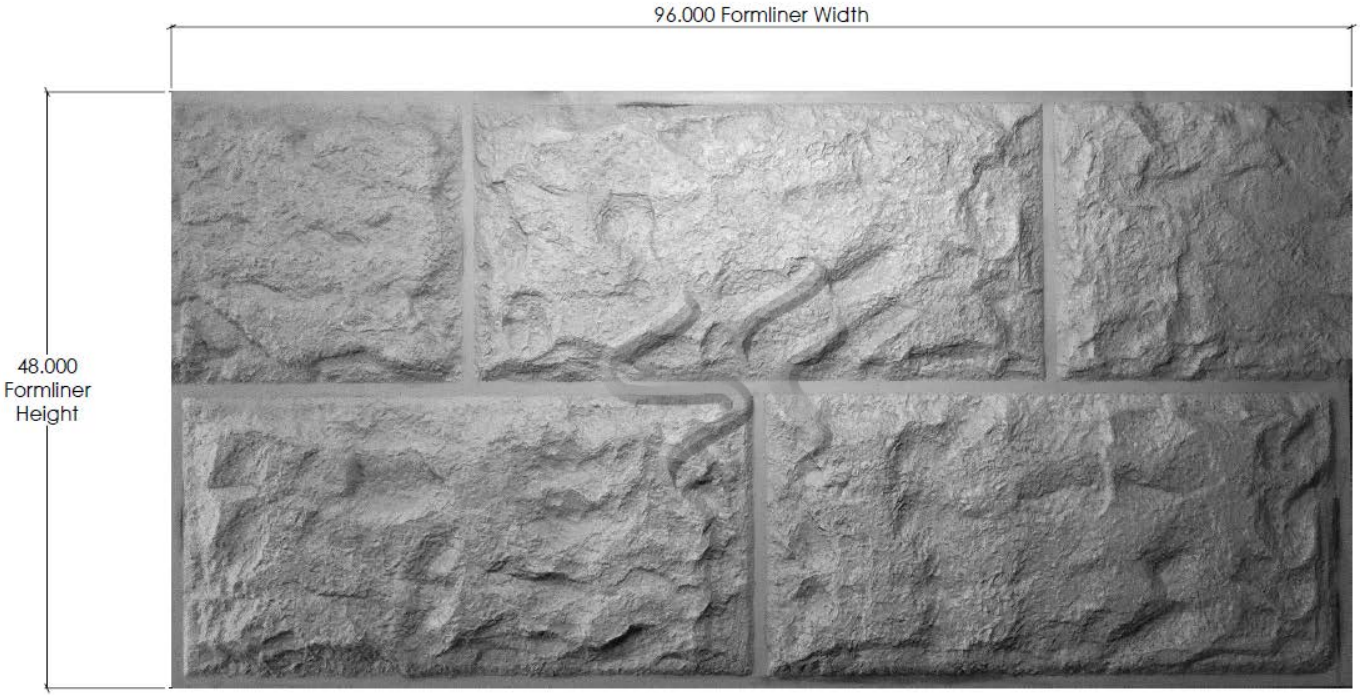

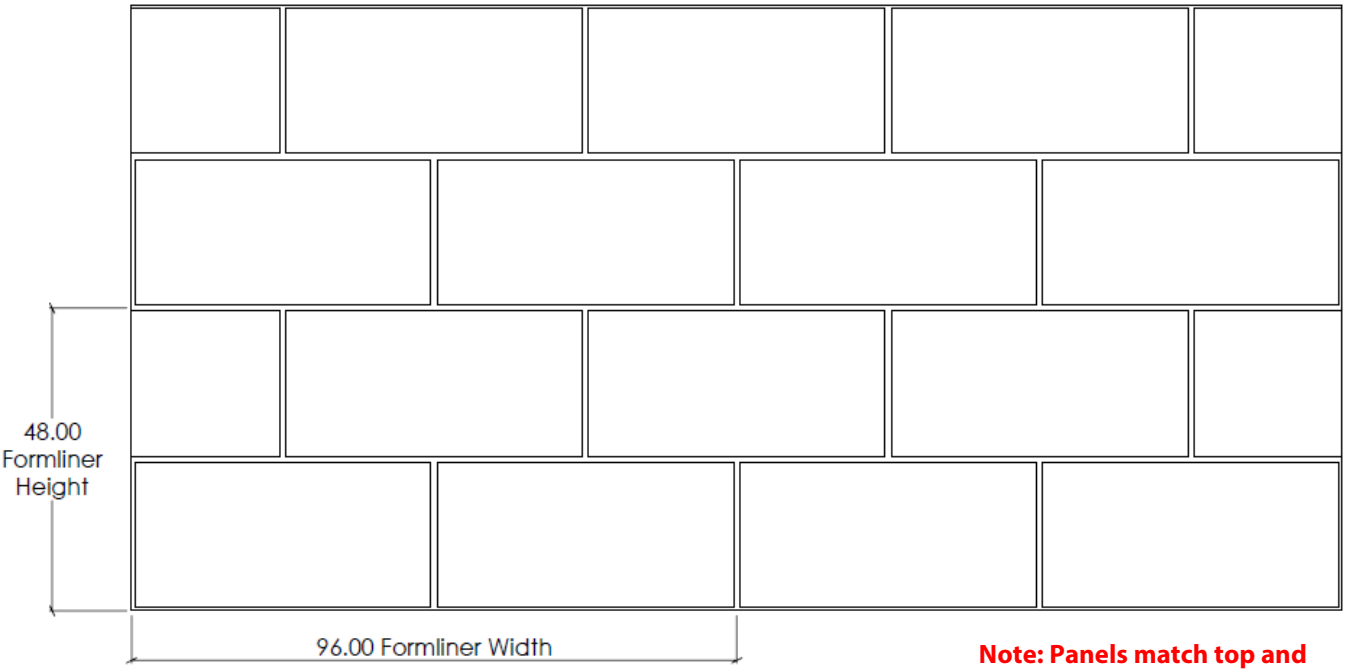

Note: Panels match top and bottom and side to side.

Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460

Spec Formliners, Inc.
Impressive on Concrete


Pattern Number: **5503**

American Stone

1-5/8" (41mm) deep cut stone
10" to 30" stones, 6" coursing



CONCRETE

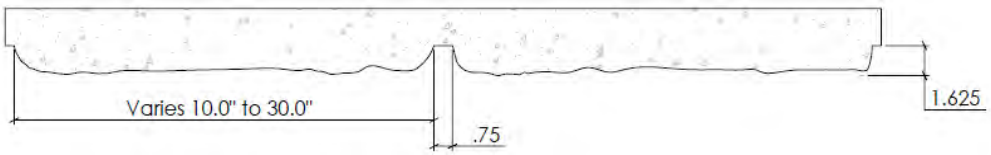

Visit **www.specformliners.com** for application guides and technical information

ThermoSpec[tm]
SINGLE OR MULTI-USE PLASTIC

Property	HIPS	ABS
Tensile D638	3700	5300
IFlexural D7905	-	9300
Hardness D786	-	105
Material Weights - lbs/ft²		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843
Thicknesses Available		
0.070, 0.090, 0.110, 0.145, 0.155, 0.180		

ElastoSpec Lite[tm] Semi-Elastomeric
MULTI-USE MATERIAL

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
Material Weights - lbs/ft²		
Varies by Pattern		
Maximum Thickness		
1/4" + Relief		

ElastoSpec[tm] 100% Solid Urethane
BONDED TO 3/4" PLYWOOD

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft²		
Varies by Pattern		
Maximum Thickness		
1-1/8" + Relief		

Call for ThermoSpec[tm] Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available
ElastoSpec[tm] Customized Panel Sizes and Art Panels

Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460

Spec Formliners, Inc.


Impressive on Concrete

Pattern Number: **5503**

American Stone

1-5/8" (41mm) deep cut stone
10" to 30" stones, 6" coursing



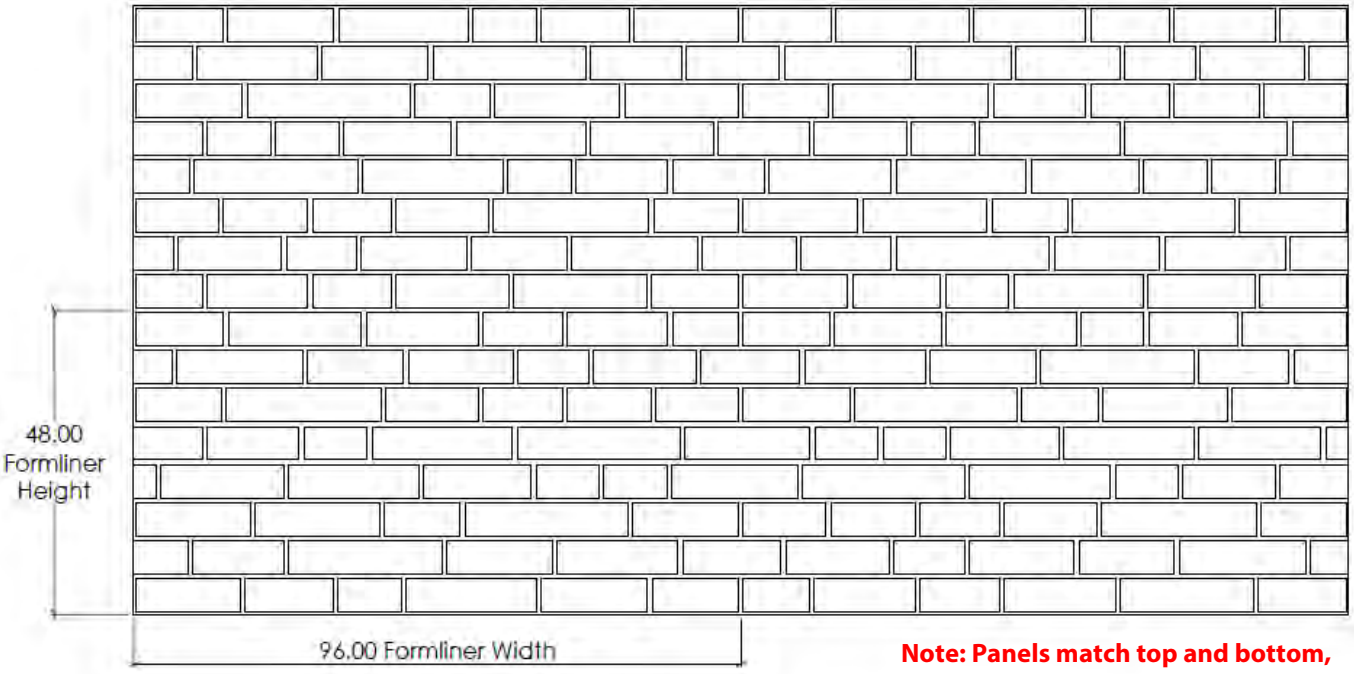

Note: Panels match top and bottom, side to side and rotated180°.

Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460


Spec Formliners, Inc.
Impressive on Concrete

Pattern Number: **5527**

Cut Random Stone

2" (50mm) deep cut stone
3/4" mortar joint, 14" coursing
Note: 44.25" panel width



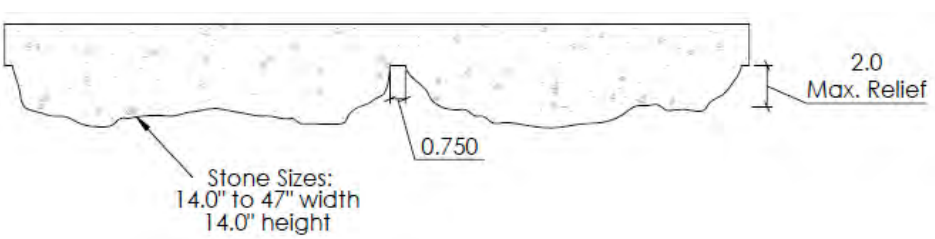

Visit **www.specformliners.com** for application guides and technical information

ThermoSpec^{tm}
SINGLE OR MULTI-USE PLASTIC

Property	HIPS	ABS
Tensile D638	3700	5300
IFlexural D7905	-	9300
Hardness D786	-	105
Material Weights - lbs/ft^2		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843
Thicknesses Available		
0.070, 0.090, 0.110, 0.145, 0.155, 0.180		

ElastoSpec Lite^{tm} Semi-Elastomeric
MULTI-USE MATERIAL

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1/4" + Relief		

ElastoSpec^{tm} 100% Solid Urethane
BONDED TO 3/4" PLYWOOD

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1-1/8" + Relief		

Call for ThermoSpec^{tm} Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available
ElastoSpec^{tm} Customized Panel Sizes and Art Panels

Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460

Spec Formliners, Inc.


Impressive on Concrete

Pattern Number: **5527**

Cut Random Stone

2” (50mm) deep cut stone
3/4" mortar joint, 14" coursing
Note: 44.25" panel width



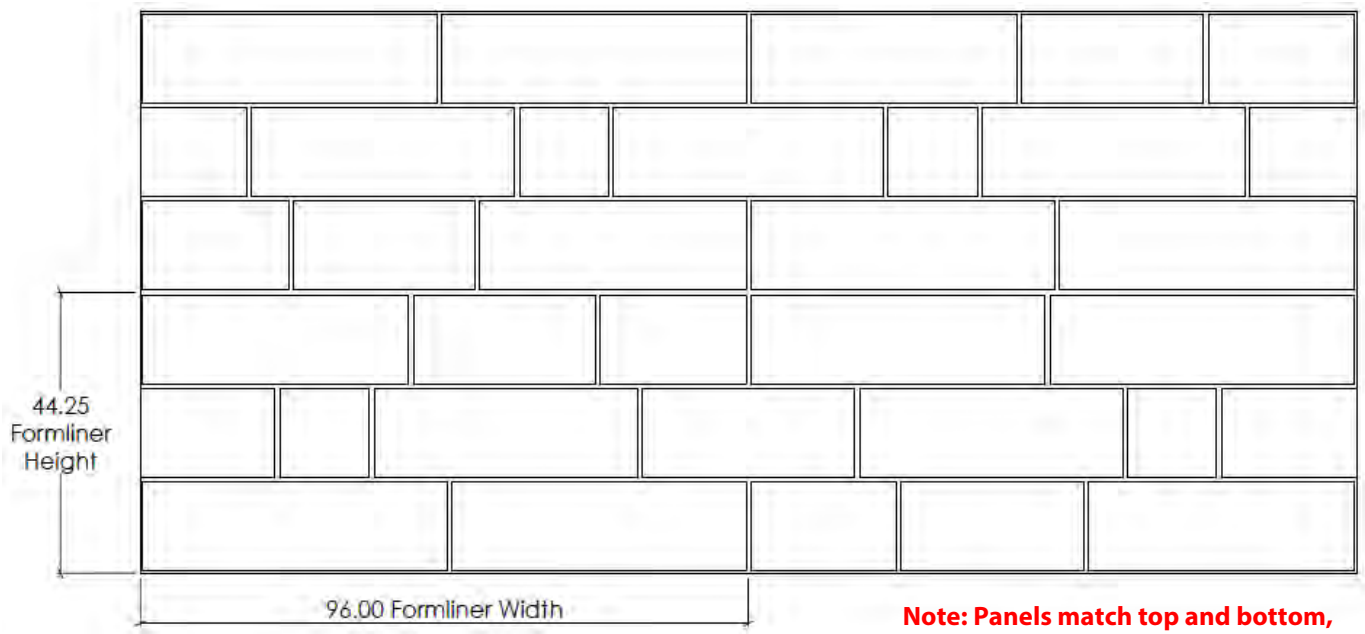

Note: Panels match top and bottom, side to side and rotated180°.

Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460

Spec Formliners, Inc.
Impressive on Concrete


Pattern Number: **5533**

Keystone Ashlar

1-1/4" (32mm) maximum relief
1/2" to 3/4" mortar joint
7" to 23" W x 3" to 14.4" H stones



CONCRETE

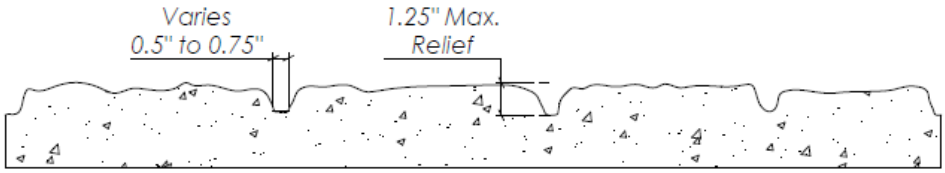

Visit **www.specformliners.com** for application guides and technical information

ThermoSpec^{tm}
SINGLE OR MULTI-USE PLASTIC

Property	HIPS	ABS
Tensile D638	3700	5300
IFlexural D7905	-	9300
Hardness D786	-	105
Material Weights - lbs/ft^2		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843
Thicknesses Available		
0.070, 0.090, 0.110, 0.145, 0.155, 0.180		

ElastoSpec Lite^{tm} Semi-Elastomeric
MULTI-USE MATERIAL

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1/4" + Relief		

ElastoSpec^{tm} 100% Solid Urethane
BONDED TO 3/4" PLYWOOD

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1-1/8" + Relief		

Call for ThermoSpec^{tm} Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available
ElastoSpec^{tm} Customized Panel Sizes and Art Panels


Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460

Spec Formliners, Inc.
Impressive on Concrete


Pattern Number: **5533**

Keystone Ashlar

1-1/4" (32mm) maximum relief
1/2" to 3/4" mortar joint
7" to 23" W x 3" to 14.4" H stones

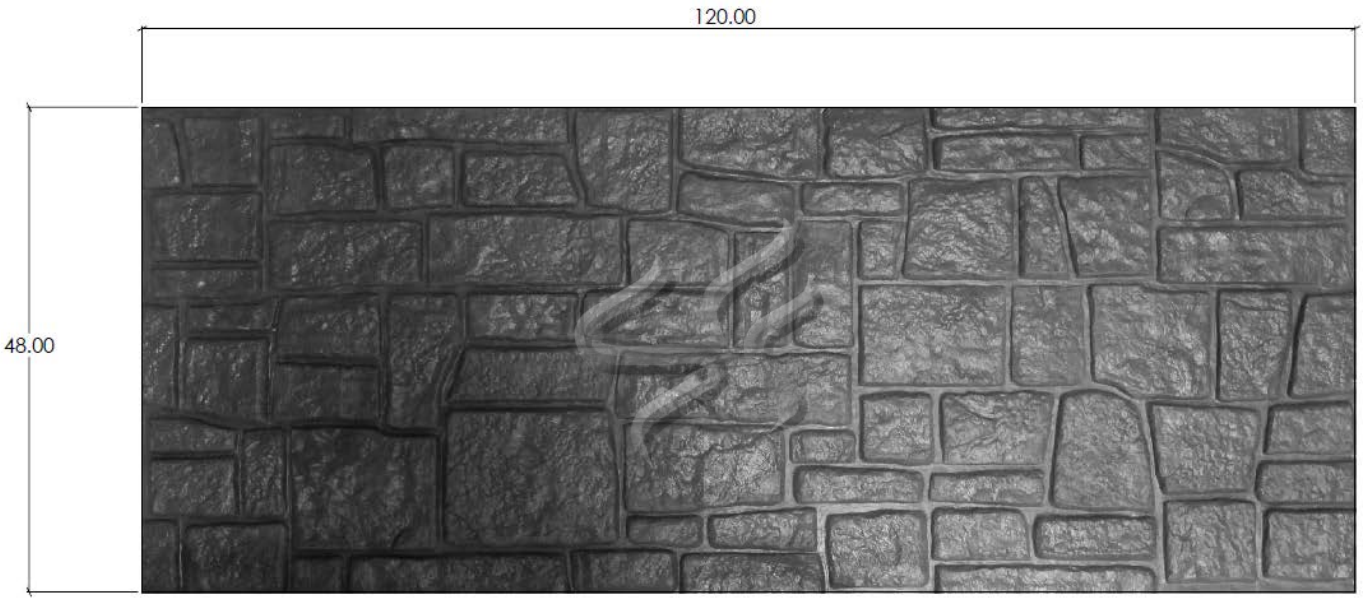

Panels are available in 4'x10' and 4'x12'.
***Actual Stone Layout may differ from drawing.**

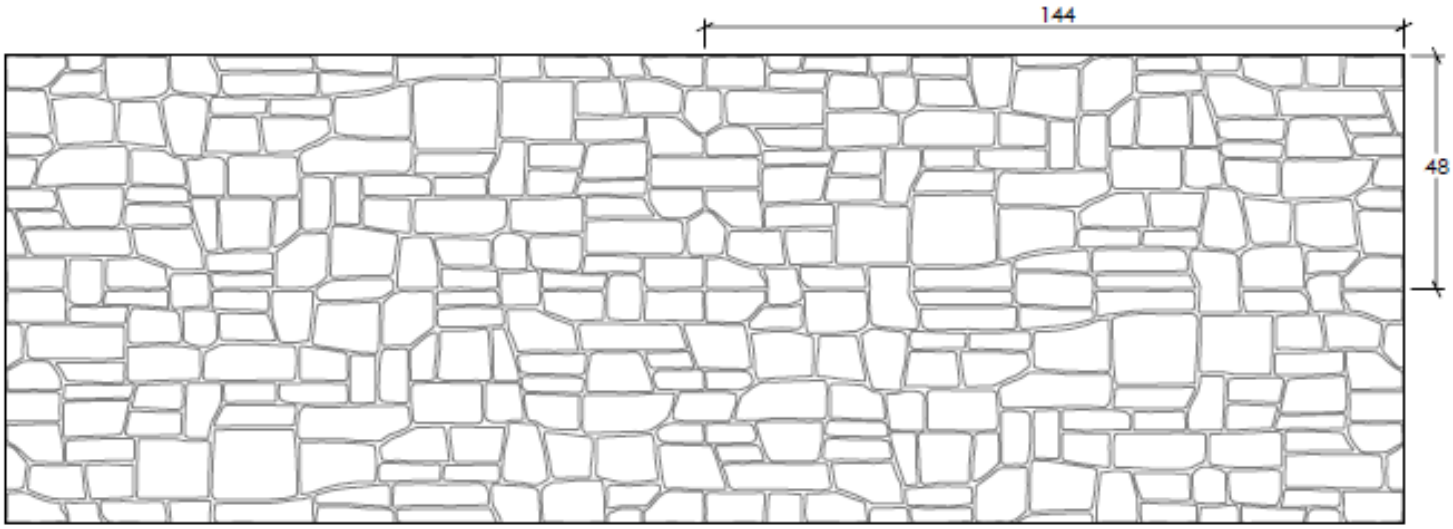

Note: Panels match top and bottom, side to side and rotated180°.


Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460

Spec Formliners, Inc.
Impressive on Concrete


Pattern Number: **5535**

Fall River Cut Stone

1" (25mm) mortar joint
2" (51mm) maximum relief

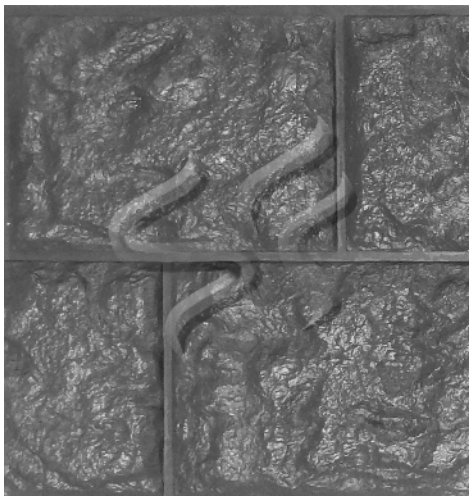

CONCRETE

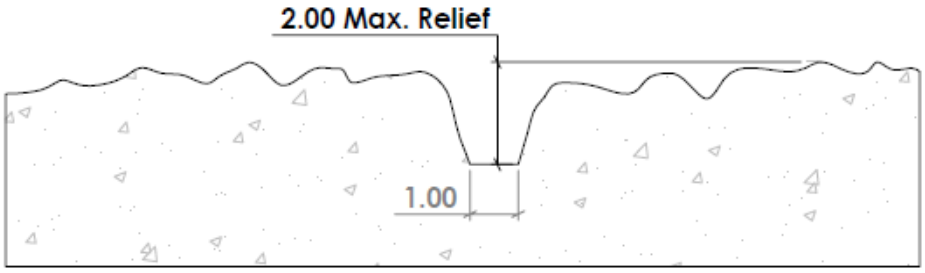

Visit **www.specformliners.com** for application guides and technical information

ThermoSpec^{tm}
SINGLE OR MULTI-USE PLASTIC

Property	HIPS	ABS
Tensile D638	3700	5300
IFlexural D7905	-	9300
Hardness D786	-	105
Material Weights - lbs/ft^2		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843
Thicknesses Available		
0.070, 0.090, 0.110, 0.145, 0.155, 0.180		

ElastoSpec Lite^{tm} Semi-Elastomeric
MULTI-USE MATERIAL

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1/4" + Relief		

ElastoSpec^{tm} 100% Solid Urethane
BONDED TO 3/4" PLYWOOD

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1-1/8" + Relief		

Call for ThermoSpec^{tm} Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available
ElastoSpec^{tm} Customized Panel Sizes and Art Panels

Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460


Spec Formliners, Inc.
Impressive on Concrete

Pattern Number: **5535**

Fall River Cut Stone

1” (25mm) mortar joint
2" (51mm) maximum relief



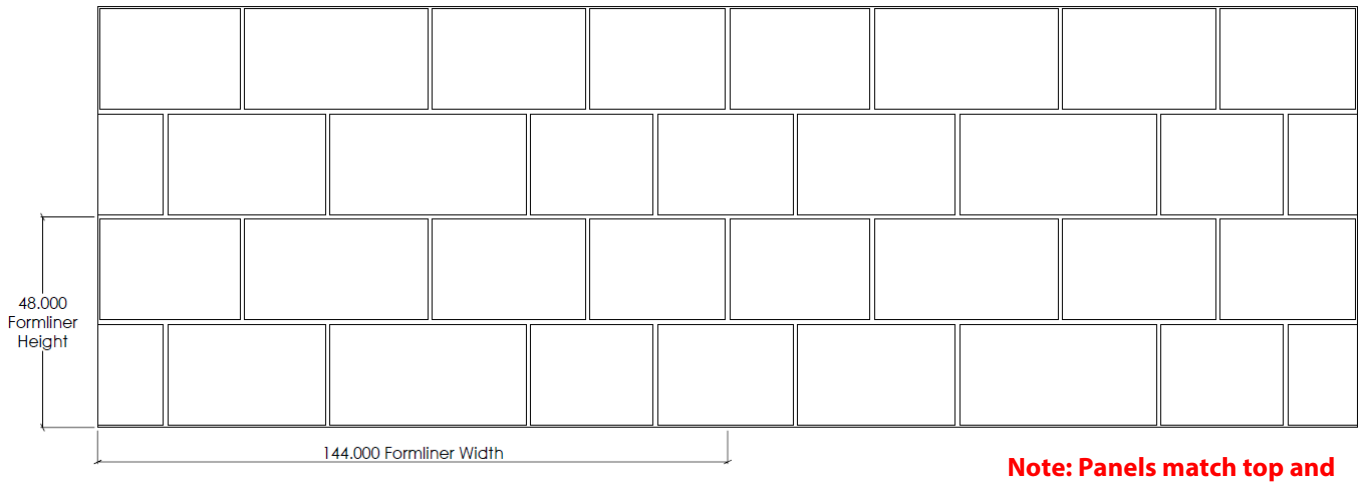

Note: Panels match top and bottom and side to side.


Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460


Spec Formliners, Inc.
Impressive on Concrete

Pattern Number: **5536**

Cracked Limestone

1-1/2" (38mm) maximum relief
1/2" to 3/4" mortar joint

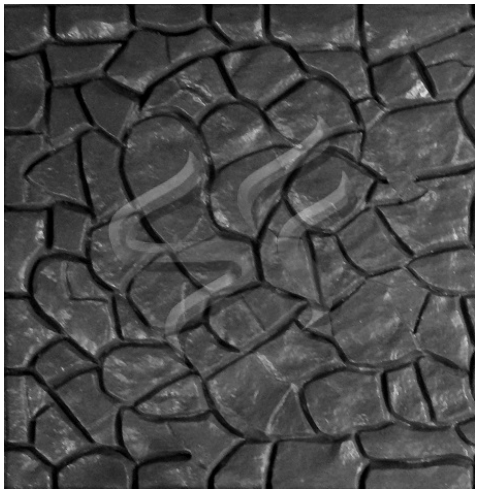

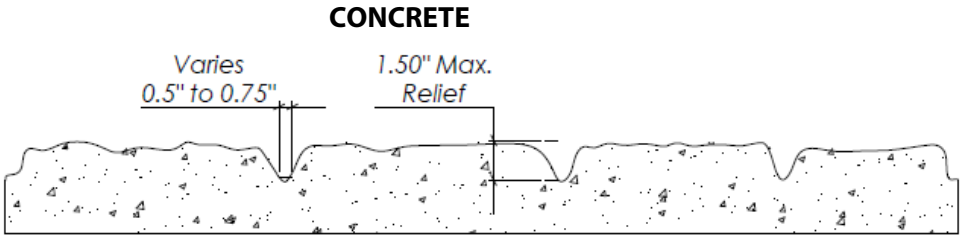

Visit **www.specformliners.com** for application guides and technical information

ThermoSpec^{tm}
SINGLE OR MULTI-USE PLASTIC

Property	HIPS	ABS
Tensile D638	3700	5300
IFlexural D7905	-	9300
Hardness D786	-	105
Material Weights - lbs/ft^2		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843
Thicknesses Available		
0.070, 0.090, 0.110, 0.145, 0.155, 0.180		

ElastoSpec Lite^{tm} Semi-Elastomeric
MULTI-USE MATERIAL

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1/4" + Relief		

ElastoSpec^{tm} 100% Solid Urethane
BONDED TO 3/4" PLYWOOD

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1-1/8" + Relief		

Call for ThermoSpec^{tm} Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available
ElastoSpec^{tm} Customized Panel Sizes and Art Panels

Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460

Spec Formliners, Inc.
Impressive on Concrete


Pattern Number: **5536**

Cracked Limestone

1-1/2" (38mm) maximum relief
1/2" to 3/4" mortar joint



Panels are available in 4'x10'
***Actual Stone Layout may differ from drawing.**

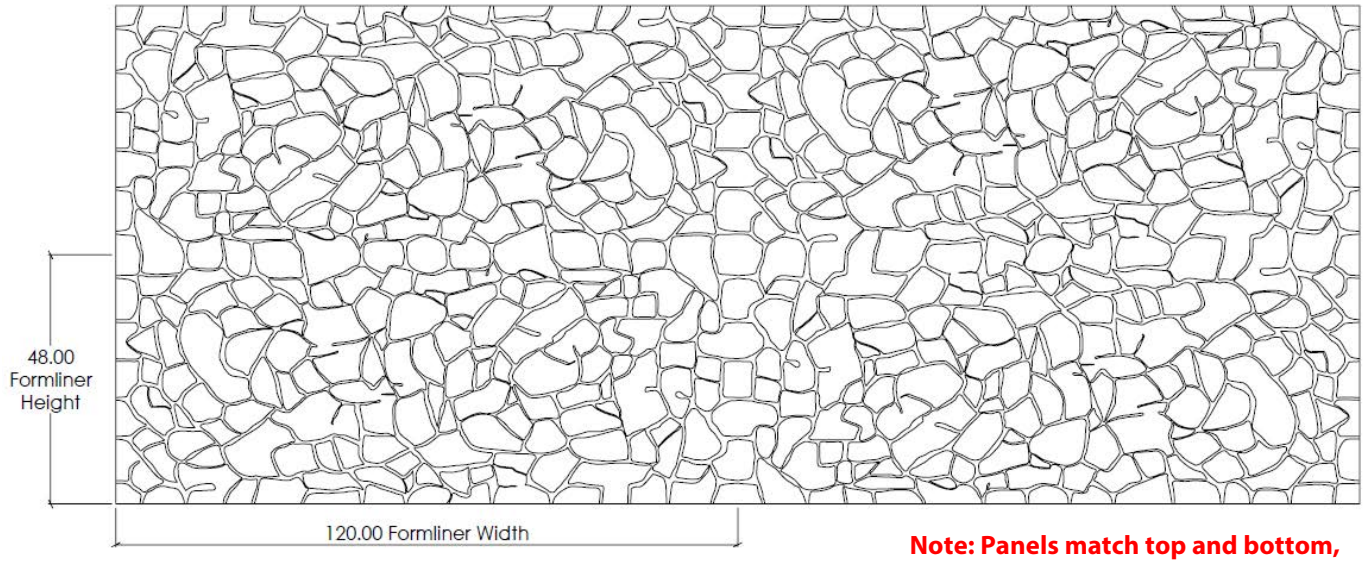

Note: Panels match top and bottom, side to side and rotated180°.


Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460


Spec Formliners, Inc.
Impressive on Concrete

Pattern Number: **5537**

Custom Random Fieldstone

3/4" relief with large irregular stones
1/2” to 1” mortar joint
8” to 24” rock sizes
Pattern 1505 modified to 3/4" relief

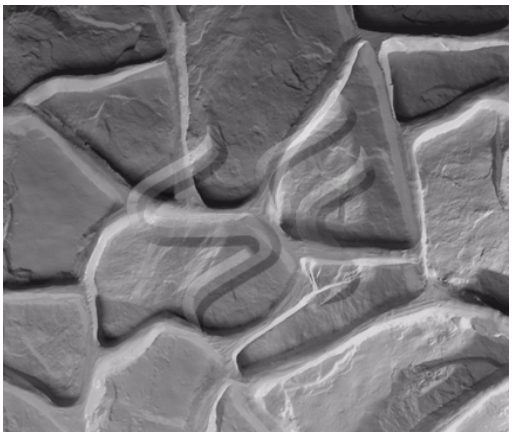

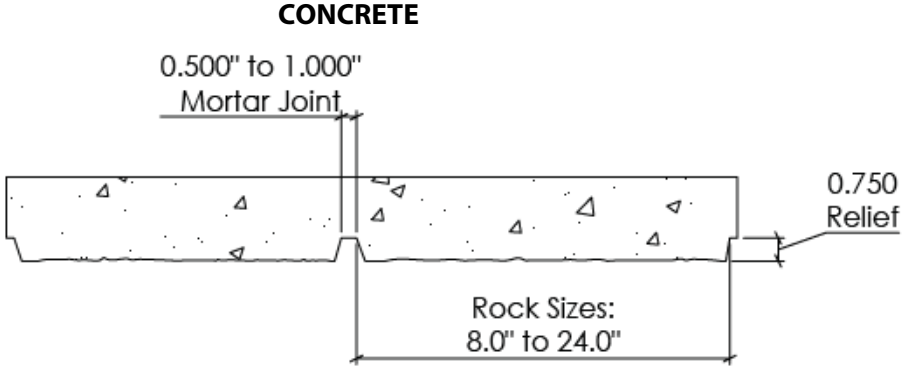

Visit **www.specformliners.com** for application guides and technical information

ThermoSpec[tm]
SINGLE OR MULTI-USE PLASTIC

Property	HIPS	ABS
Tensile D638	3700	5300
IFlexural D7905	-	9300
Hardness D786	-	105
Material Weights - lbs/ft²		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843
Thicknesses Available		
0.070, 0.090, 0.110, 0.145, 0.155, 0.180		

ElastoSpec Lite[tm] Semi-Elastomeric
MULTI-USE MATERIAL

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
Material Weights - lbs/ft²		
Varies by Pattern		
Maximum Thickness		
1/4" + Relief		

ElastoSpec[tm] 100% Solid Urethane
BONDED TO 3/4” PLYWOOD

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft²		
Varies by Pattern		
Maximum Thickness		
1-1/8" + Relief		

Call for ThermoSpec[tm] Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available
ElastoSpec[tm] Customized Panel Sizes and Art Panels

Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460


Spec Formliners, Inc.


Impressive on Concrete

Pattern Number: **5537**

Custom Random Fieldstone

3/4" relief with large irregular stones
1/2" to 1" mortar joint
8" to 24" rock sizes
Pattern 1505 modified to 3/4" relief

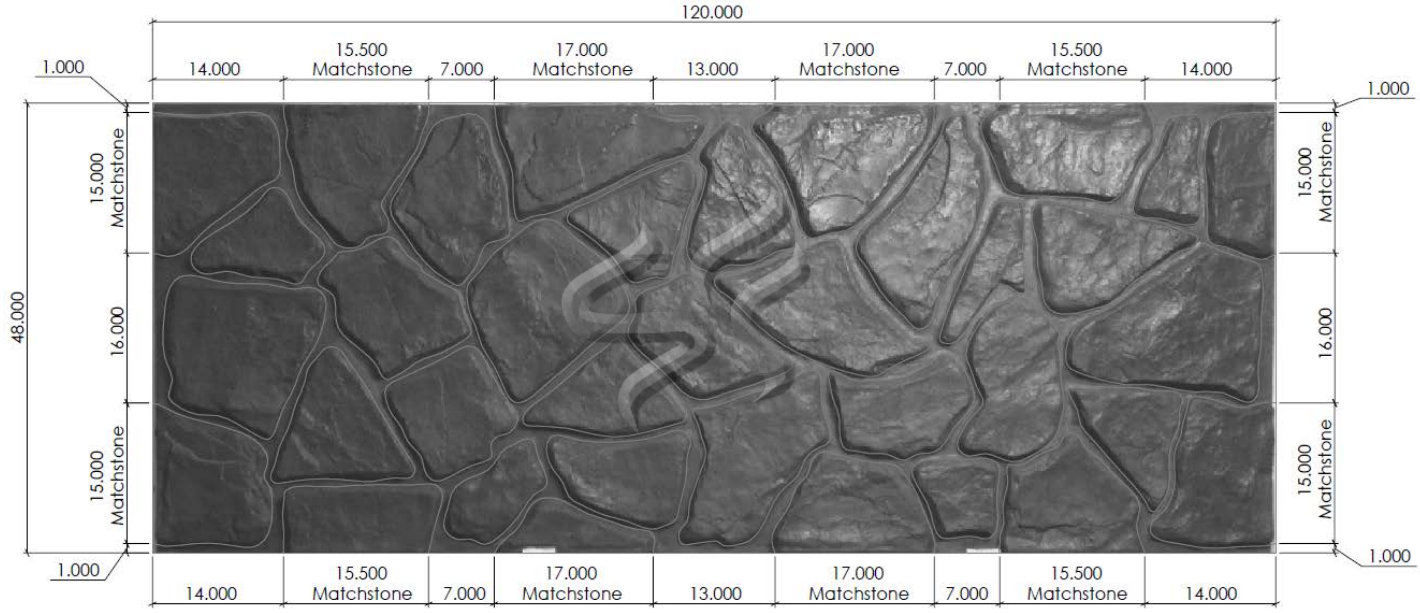

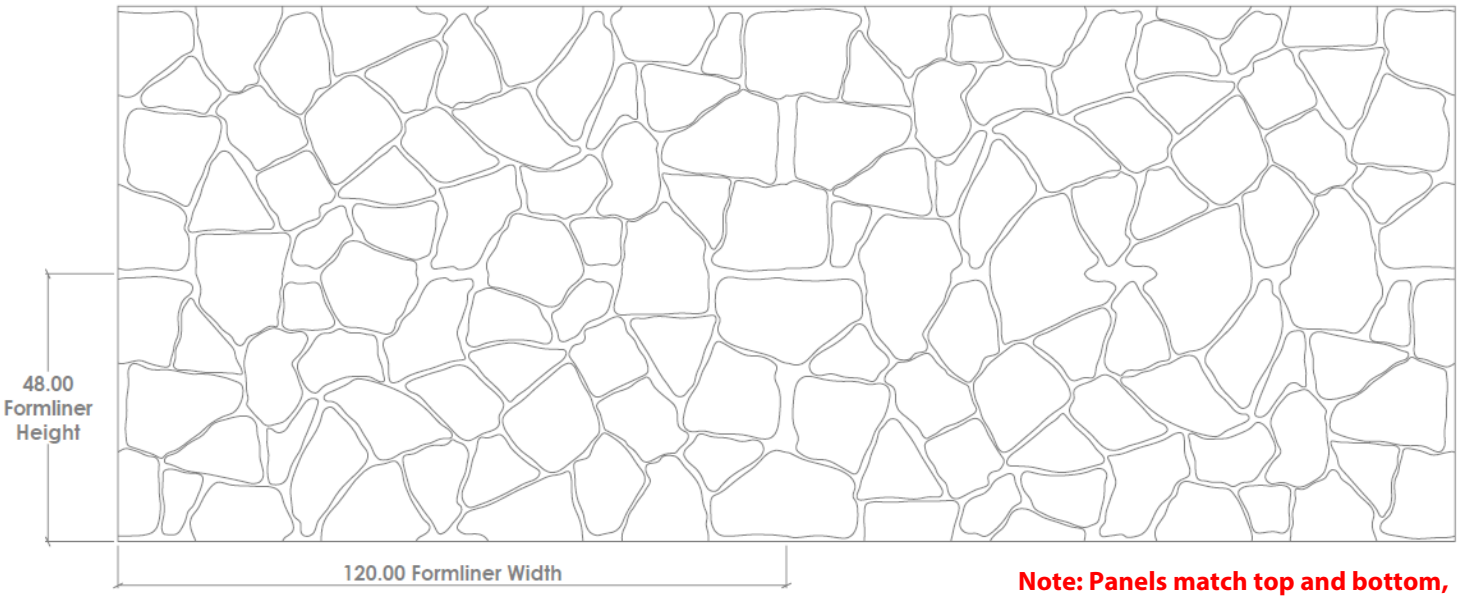

Note: Panels match top and bottom, side to side and rotated 180°.


Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460

Spec Formliners, Inc.
Impressive on Concrete


Pattern Number: **5538**

Arizona River Rock

1-1/2" maximum relief
1/2” (13mm) to 1" (25mm) mortar joint
4” to 12" width and 4" to 12" height rocks

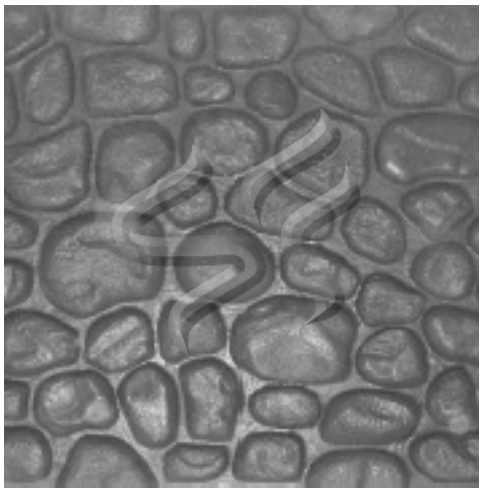

CONCRETE

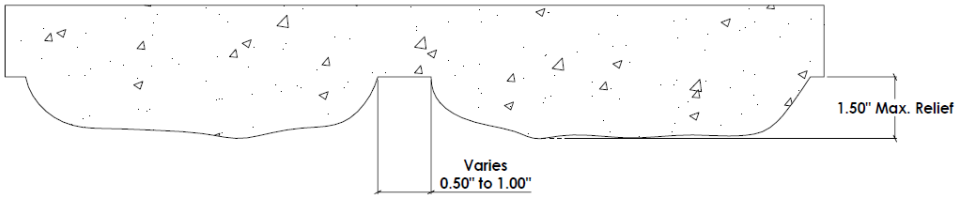

Visit **www.specformliners.com** for application guides and technical information

ThermoSpec[tm]
SINGLE OR MULTI-USE PLASTIC

Property	HIPS	ABS
Tensile D638	3700	5300
IFlexural D7905	-	9300
Hardness D786	-	105
Material Weights - lbs/ft^2		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843
Thicknesses Available		
0.070, 0.090, 0.110, 0.145, 0.155, 0.180		

ElastoSpec Lite[tm] Semi-Elastomeric
MULTI-USE MATERIAL

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1/4" + Relief		

ElastoSpec[tm] 100% Solid Urethane
BONDED TO 3/4” PLYWOOD

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1-1/8" + Relief		

Call for ThermoSpec[tm] Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available
ElastoSpec[tm] Customized Panel Sizes and Art Panels


Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460


Spec Formliners, Inc.
Impressive on Concrete

Pattern Number: **5538**

Arizona River Rock

1-1/2" maximum relief
1/2” (13mm) to 1" (25mm) mortar joint
4” to 12" width and 4" to 12" height rocks

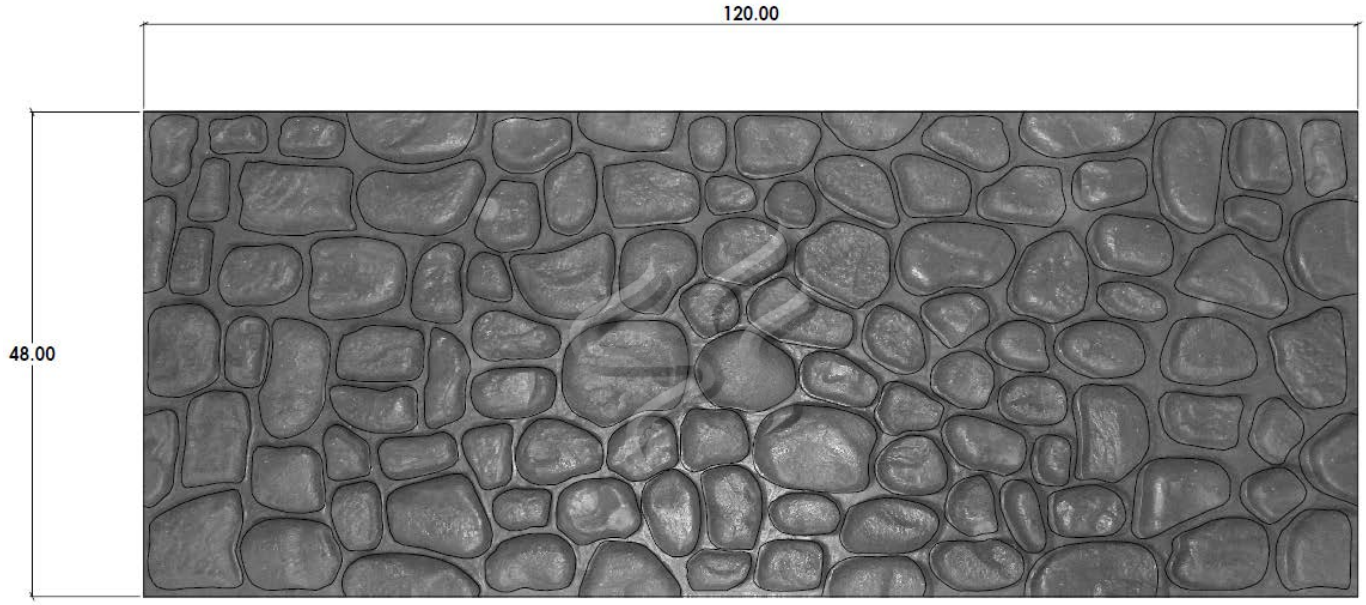

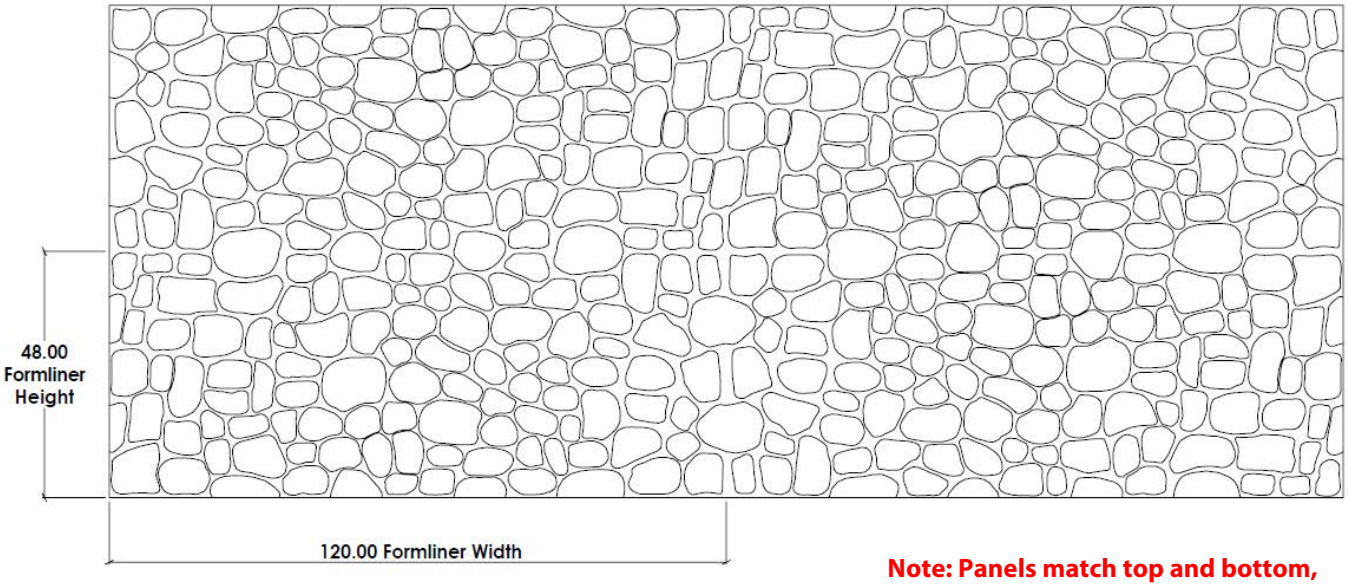

Note: Panels match top and bottom, side to side and rotated180°.

Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460

Spec Formliners, Inc.
Impressive on Concrete


Pattern Number: **5550**

Kane Long Stone

0.39" mortar joint
1/2" maximum relief
1/4" maximum texture relief
3.61" to 17.54" width and
3.61" to 7.61" height stones



CONCRETE

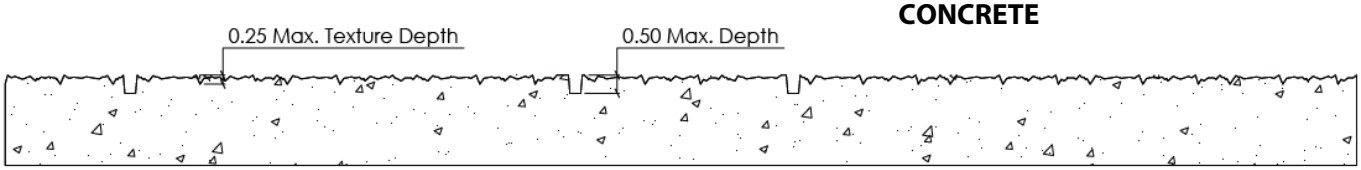

Visit **www.specformliners.com** for application guides and technical information

ThermoSpec^{tm}
SINGLE OR MULTI-USE PLASTIC

Property	HIPS	ABS
Tensile D638	3700	5300
IFlexural D7905	-	9300
Hardness D786	-	105
Material Weights - lbs/ft^2		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843
Thicknesses Available		
0.070, 0.090, 0.110, 0.145, 0.155, 0.180		

ElastoSpec Lite^{tm} Semi-Elastomeric
MULTI-USE MATERIAL

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1/4" + Relief		

ElastoSpec^{tm} 100% Solid Urethane
BONDED TO 3/4" PLYWOOD

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1-1/8" + Relief		

Call for ThermoSpec^{tm} Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available
ElastoSpec^{tm} Customized Panel Sizes and Art Panels

Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460


Spec Formliners, Inc.


Impressive on Concrete

Pattern Number: **5550**

Kane Long Stone

0.39” mortar joint
1/2" maximum relief
1/4" maximum texture relief
3.61” to 17.54" width and
3.61" to 7.61" height stones

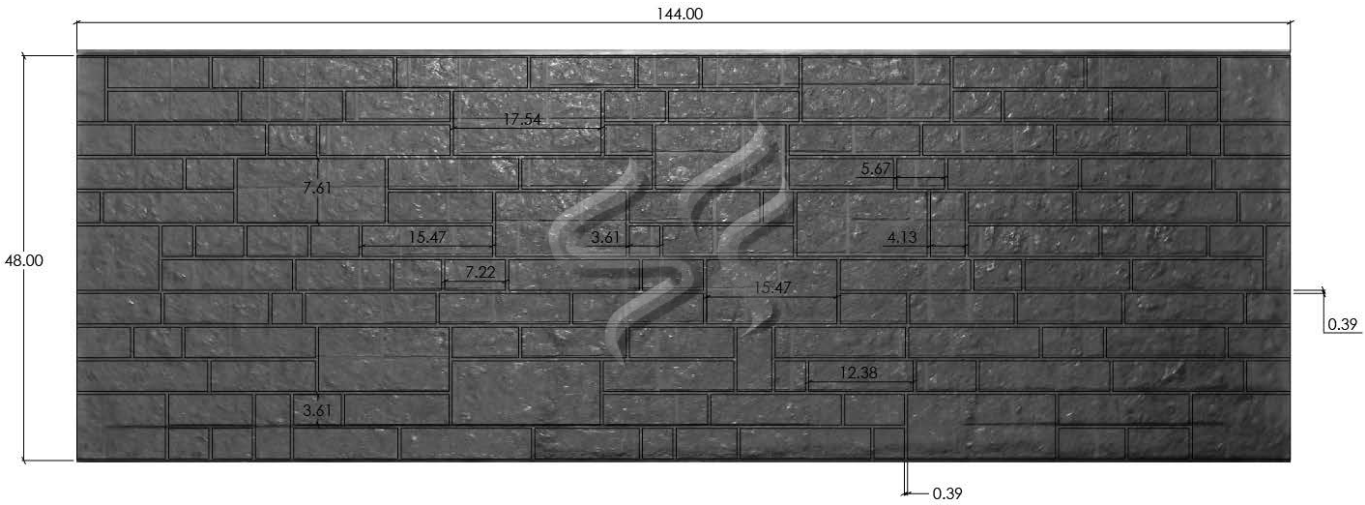

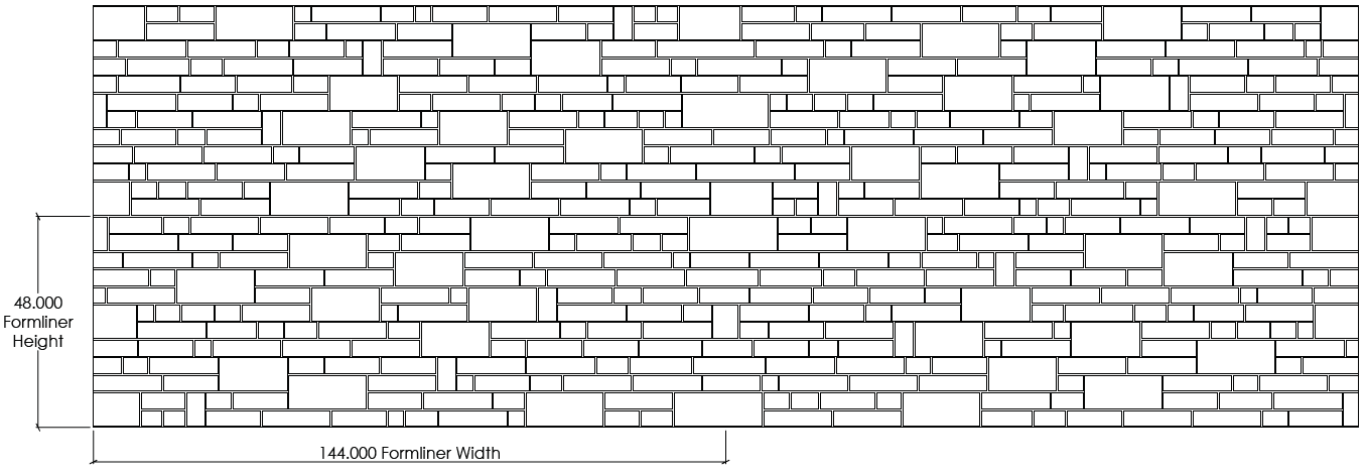

Note: Panels match top and bottom, side to side and rotated 180°.


Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460

Spec Formliners, Inc.
Impressive on Concrete


Pattern Number: **5552**

Colorado Granite

3-1/2" (89mm) maximum relief
5-1/2" to 18-1/2" width and
7" to 28" height stones
1/2" to 3/4" mortar joints

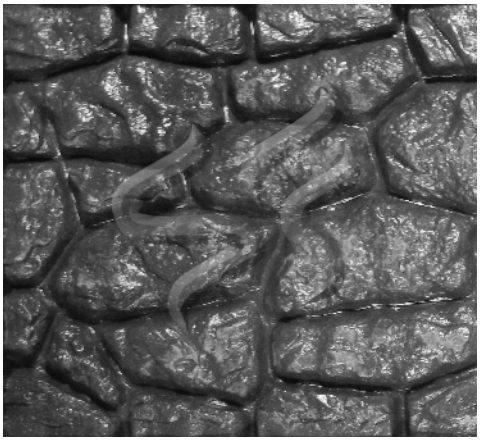

CONCRETE

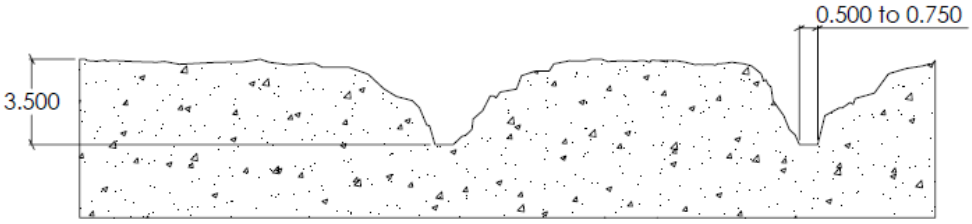

Visit **www.specformliners.com** for application guides and technical information

ThermoSpec^{tm}
SINGLE OR MULTI-USE PLASTIC

Property	HIPS	ABS
Tensile D638	3700	5300
IFlexural D7905	-	9300
Hardness D786	-	105
Material Weights - lbs/ft^2		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843
Thicknesses Available		
0.070, 0.090, 0.110, 0.145, 0.155, 0.180		

ElastoSpec Lite^{tm} Semi-Elastomeric
MULTI-USE MATERIAL

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1/4" + Relief		

ElastoSpec^{tm} 100% Solid Urethane
BONDED TO 3/4" PLYWOOD

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1-1/8" + Relief		

Call for ThermoSpec^{tm} Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available
ElastoSpec^{tm} Customized Panel Sizes and Art Panels


Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460

Spec Formliners, Inc.
Impressive on Concrete


Pattern Number: **5552**

Colorado Granite

3-1/2" (89mm) maximum relief
5-1/2" to 18-1/2" width and
7" to 28" height stones
1/2" to 3/4" mortar joints

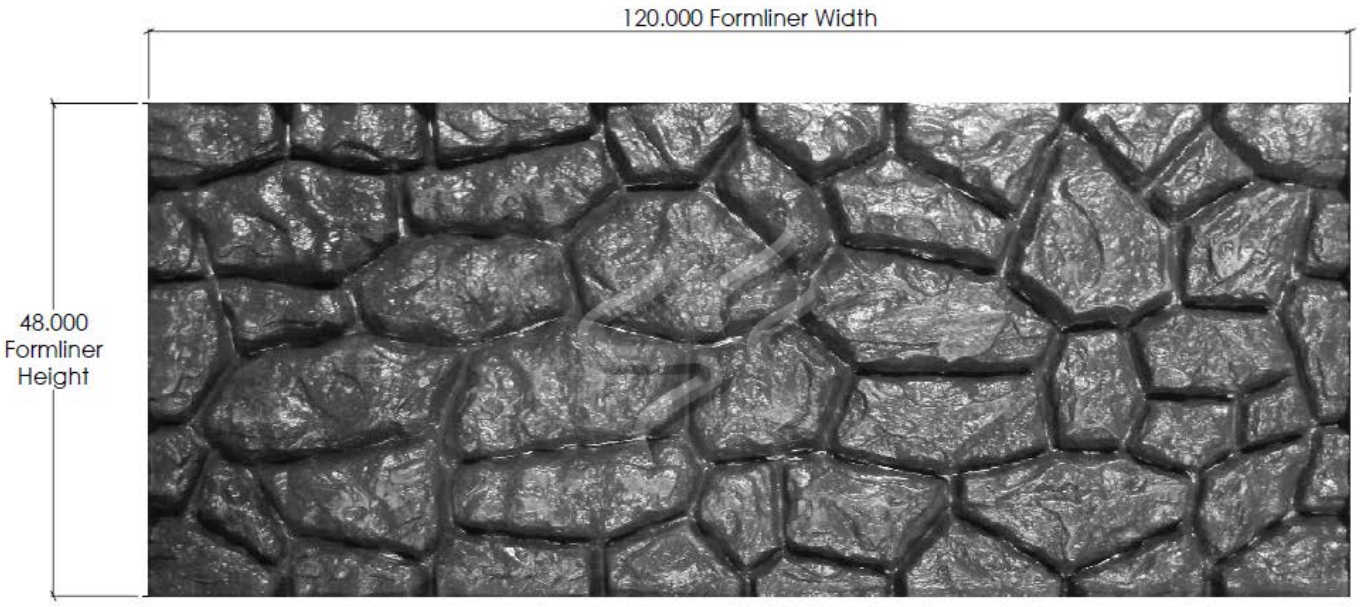

Panels are available in 4'x10'.
***Actual Stone Layout may differ from drawing.**

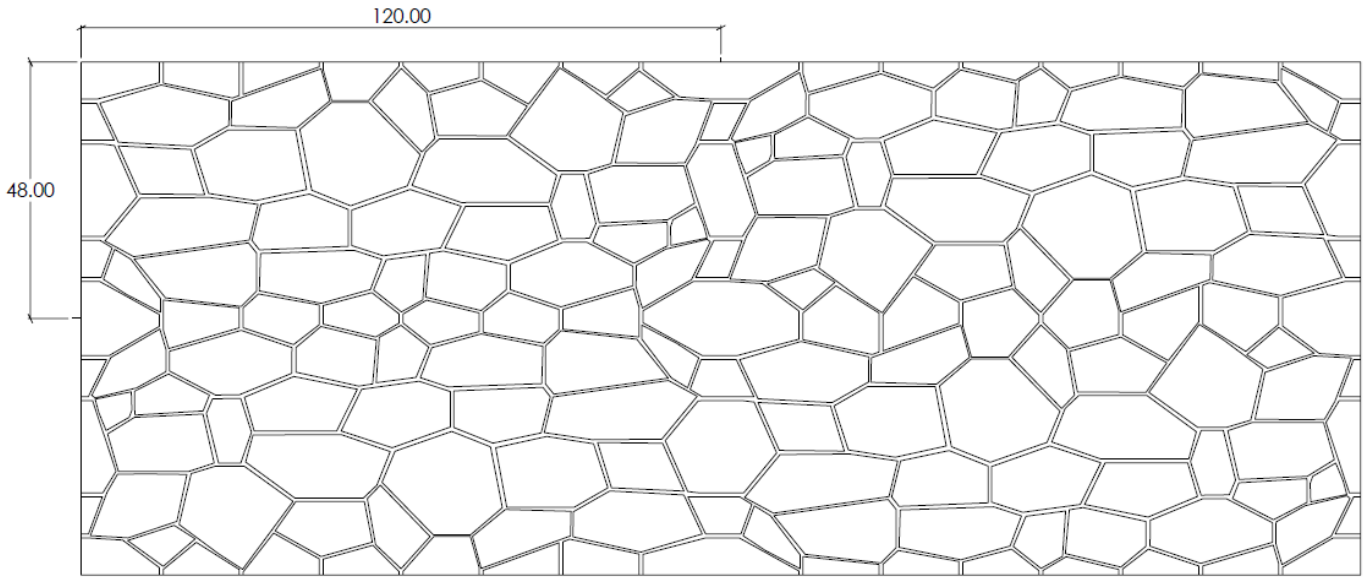

Note: Panels match top and bottom, side to side and rotated 180°.

Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460

Spec Formliners, Inc.
Impressive on Concrete


Pattern Number: **5554A**

Coastal Fieldstone

1-1/2" (38mm) maximum relief
1.60” to 20" width rocks
1.50" to 10.60" height rocks
Individual rock shapes may vary

Note:
Panels available in 4'x8'



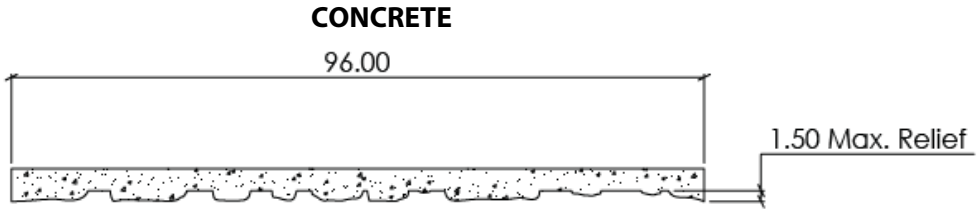

Visit **www.specformliners.com** for application guides and technical information

ThermoSpec™
SINGLE OR MULTI-USE PLASTIC

Property	HIPS	ABS
Tensile D638	3700	5300
IFlexural D7905	-	9300
Hardness D786	-	105
Material Weights - lbs/ft²		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843
Thicknesses Available		
0.070, 0.090, 0.110, 0.145, 0.155, 0.180		

ElastoSpec Lite™ Semi-Elastomeric
MULTI-USE MATERIAL

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
Material Weights - lbs/ft²		
Varies by Pattern		
Maximum Thickness		
1/4" + Relief		

ElastoSpec™ 100% Solid Urethane
BONDED TO 3/4” PLYWOOD

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft²		
Varies by Pattern		
Maximum Thickness		
1-1/8" + Relief		

Call for ThermoSpec™ Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available
ElastoSpec™ Customized Panel Sizes and Art Panels

Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460

Spec Formliners, Inc.


Impressive on Concrete

Pattern Number: **5554A**


Coastal Fieldstone

1-1/2" (38mm) maximum relief
1.60" to 20" width rocks
1.50" to 10.60" height rocks
Individual rock shapes may vary

Note:
Panels available in 4'x8'

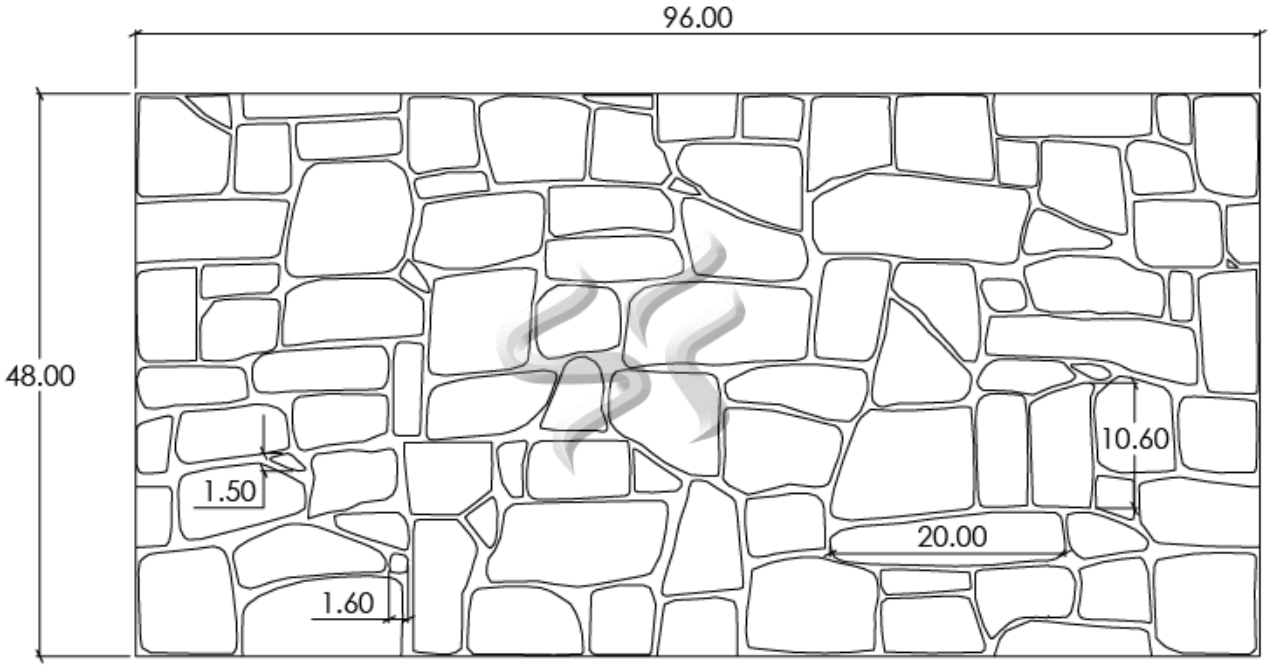

PANEL A

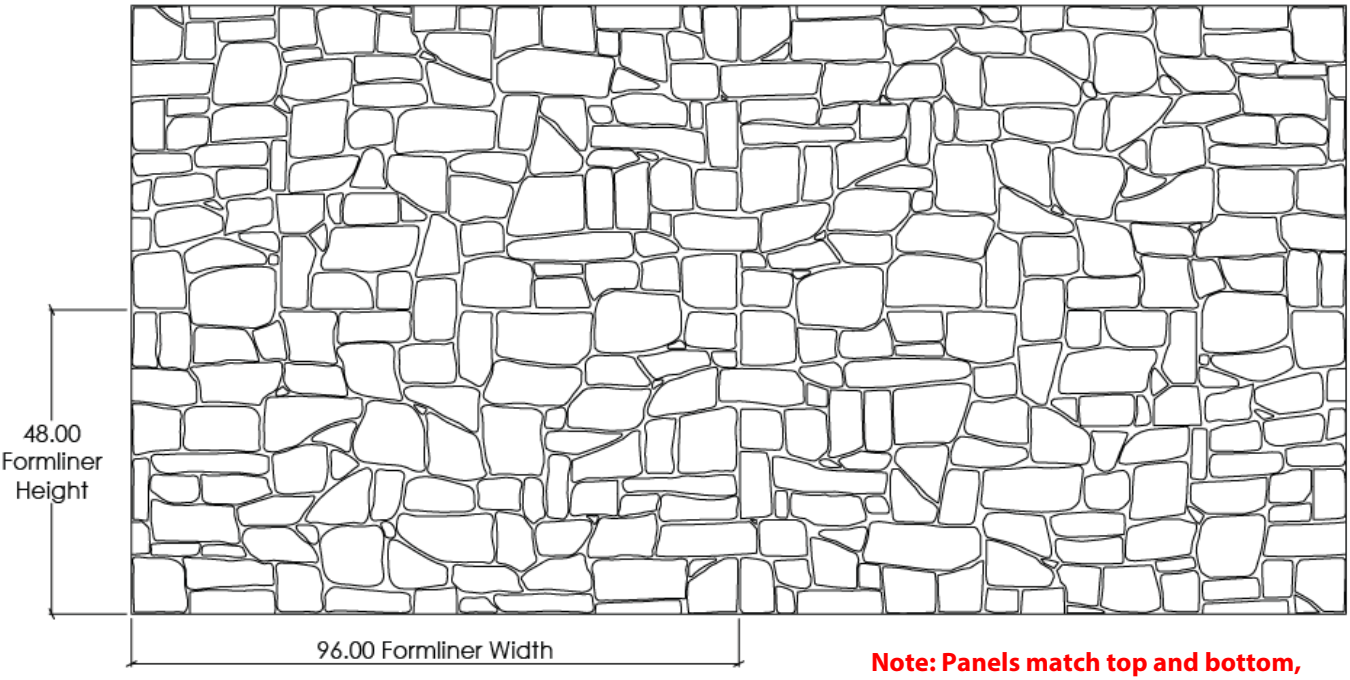

Note: Panels match top and bottom, side to side and rotated 180°.

Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460

Spec Formliners, Inc.
Impressive on Concrete


Pattern Number: **5554B**

Coastal Fieldstone

1-1/2" (38mm) maximum relief
1.60” to 20" width rocks
1.50" to 10.60" height rocks
Individual rock shapes may vary

Note:
Panels available in 4'x8'



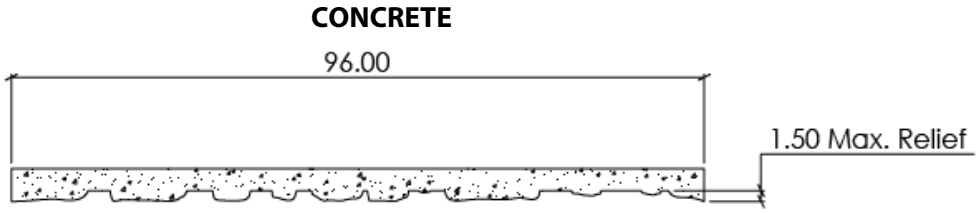

Visit **www.specformliners.com** for application guides and technical information

ThermoSpec™
SINGLE OR MULTI-USE PLASTIC

Property	HIPS	ABS
Tensile D638	3700	5300
IFlexural D7905	-	9300
Hardness D786	-	105
Material Weights - lbs/ft²		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843
Thicknesses Available		
0.070, 0.090, 0.110, 0.145, 0.155, 0.180		

ElastoSpec Lite™ Semi-Elastomeric
MULTI-USE MATERIAL

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
Material Weights - lbs/ft²		
Varies by Pattern		
Maximum Thickness		
1/4" + Relief		

ElastoSpec™ 100% Solid Urethane
BONDED TO 3/4” PLYWOOD

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft²		
Varies by Pattern		
Maximum Thickness		
1-1/8" + Relief		

Call for ThermoSpec™ Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available
ElastoSpec™ Customized Panel Sizes and Art Panels

Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460


Spec Formliners, Inc.
Impressive on Concrete

Pattern Number: **5554B**


Coastal Fieldstone

1-1/2" (38mm) maximum relief
1.60" to 20" width rocks
1.50" to 10.60" height rocks
Individual rock shapes may vary

Note:
Panels available in 4'x8'

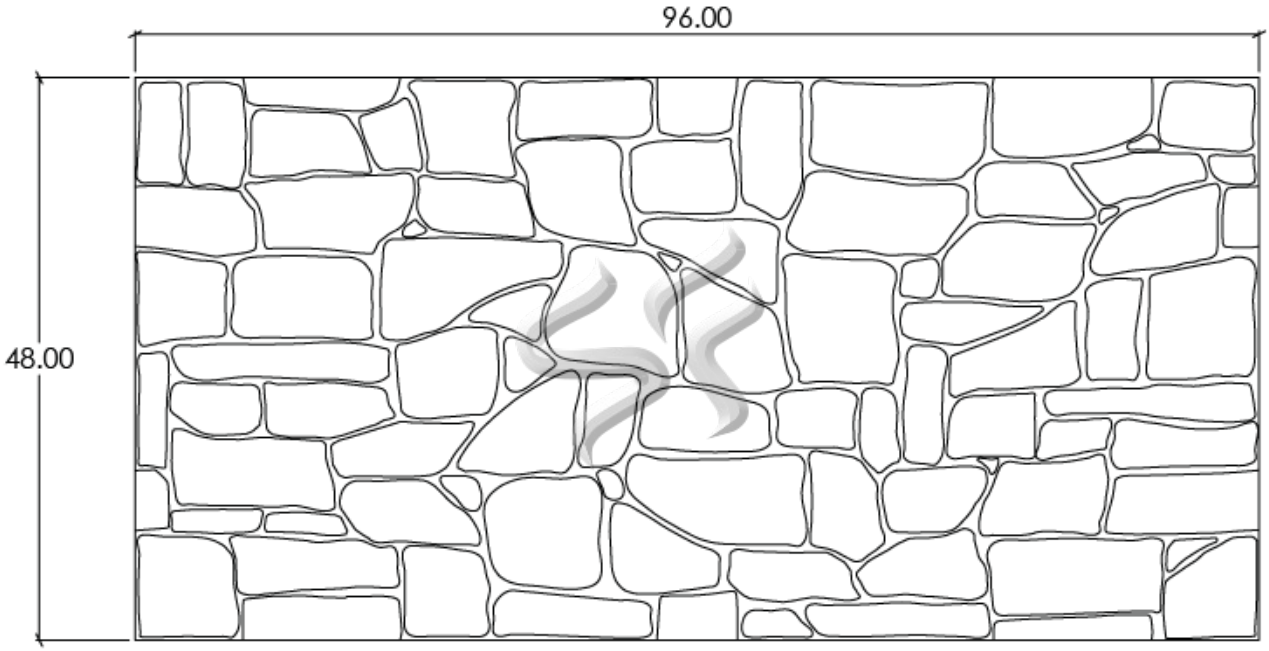

PANEL B

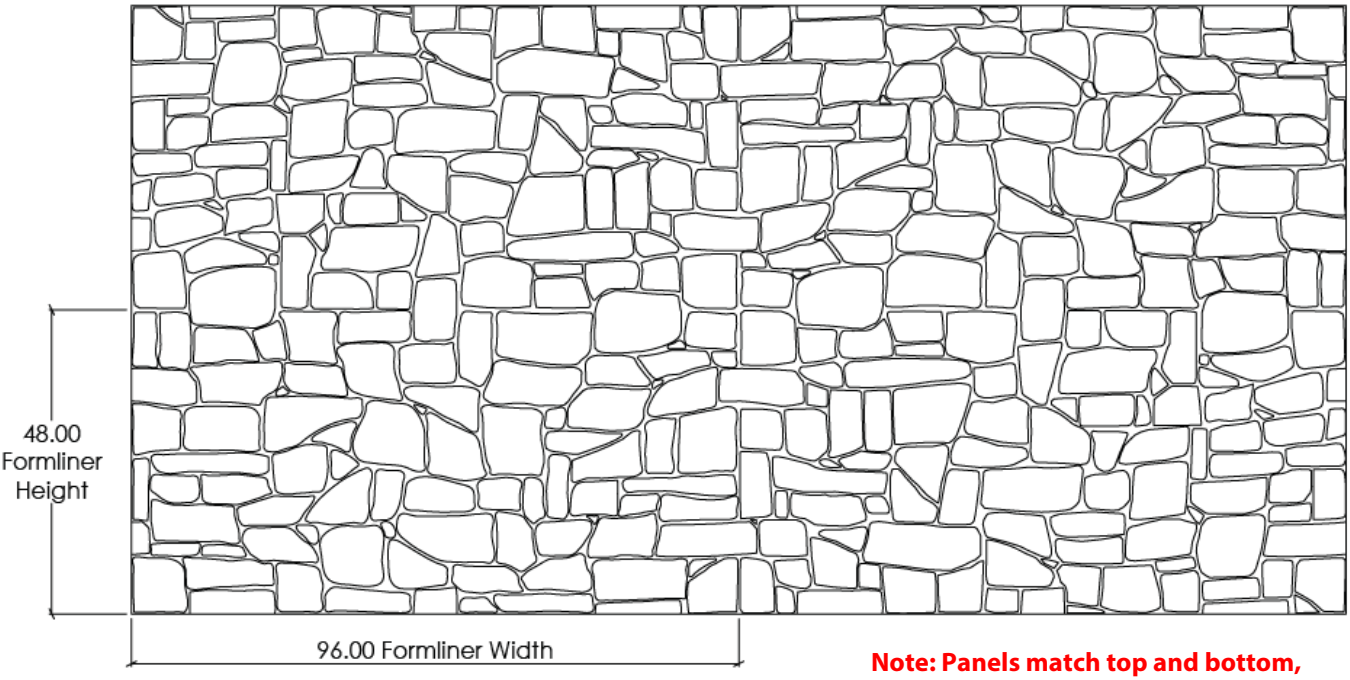

Note: Panels match top and bottom, side to side and rotated 180°.


Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460


Spec Formliners, Inc.
Impressive on Concrete

Pattern Number: **5558**

Custom Cobblestone

2" maximum relief
~12" maximum stone size

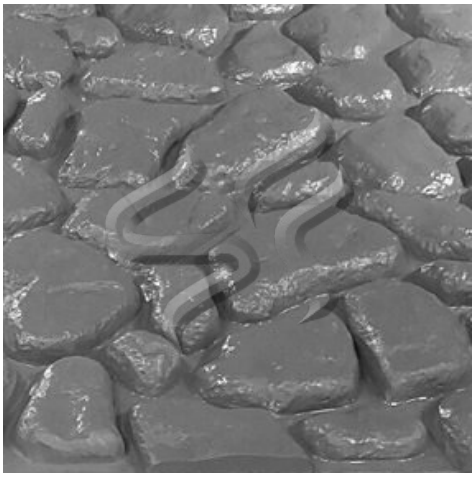

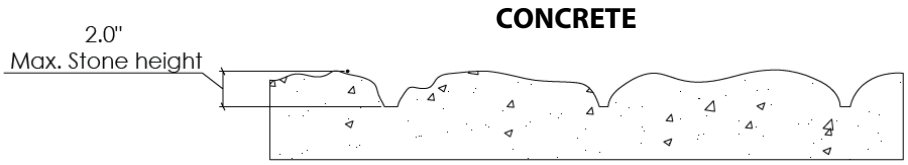

Visit **www.specformliners.com** for application guides and technical information

ThermoSpec^{tm}
Single or Multi-use Plastic

Property	HIPS	ABS
Tensile D638	3700	5300
IFlexural D7905	-	9300
Hardness D786	-	105
Material Weights - lbs/ft^2		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843
Thicknesses Available		
0.070, 0.090, 0.110, 0.145, 0.155, 0.180		

ElastoSpec Lite^{tm} Semi-Elastomeric
Multi-Use Material

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1/4" + Relief		

ElastoSpec^{tm} 100% Solid Urethane
Bonded To 3/4" Plywood

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1-1/8" + Relief		

Call for ThermoSpec^{tm} Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available
ElastoSpec^{tm} Customized Panel Sizes and Art Panels


Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460


Spec Formliners, Inc.
Impressive on Concrete

Pattern Number: **5561**

CG American Stone

1/2” (13mm) mortar joint
1" (25mm) maximum relief
7" (178mm) vertical C-C
10” to 30" width stones
42"x120" panel size
Pattern 5503 modified to 1" relief and 7" vertical C-C

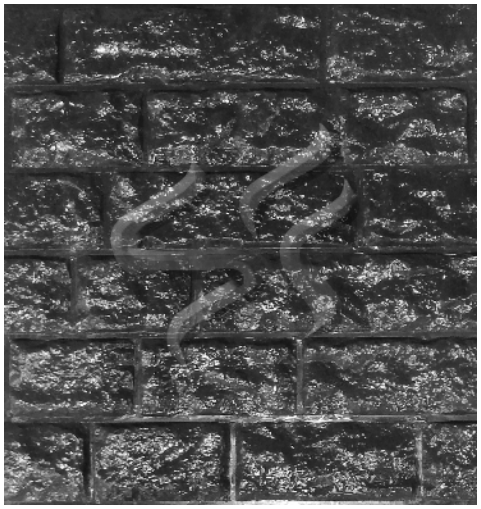

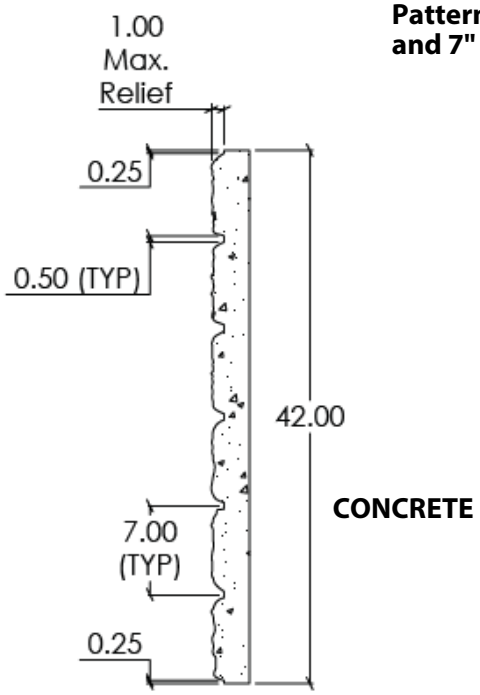

CONCRETE

Visit **www.specformliners.com** for application guides and technical information

ThermoSpec[tm]
SINGLE OR MULTI-USE PLASTIC

Property	HIPS	ABS
Tensile D638	3700	5300
IFlexural D7905	-	9300
Hardness D786	-	105
Material Weights - lbs/ft²		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843
Thicknesses Available		
0.070, 0.090, 0.110, 0.145, 0.155, 0.180		

ElastoSpec Lite[tm] Semi-Elastomeric
MULTI-USE MATERIAL

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
Material Weights - lbs/ft²		
Varies by Pattern		
Maximum Thickness		
1/4" + Relief		

ElastoSpec[tm] 100% Solid Urethane
BONDED TO 3/4” PLYWOOD

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft²		
Varies by Pattern		
Maximum Thickness		
1-1/8" + Relief		

Call for ThermoSpec[tm] Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available
ElastoSpec[tm] Customized Panel Sizes and Art Panels

Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460


Spec Formliners, Inc.


Impressive on Concrete

Pattern Number: **5561**

CG American Stone

1/2” (13mm) mortar joint
1" (25mm) maximum relief
7" (178mm) vertical C-C
10” to 30" width stones
42"x120" panel size
Pattern 5503 modified to 1" relief and 7" vertical C-C

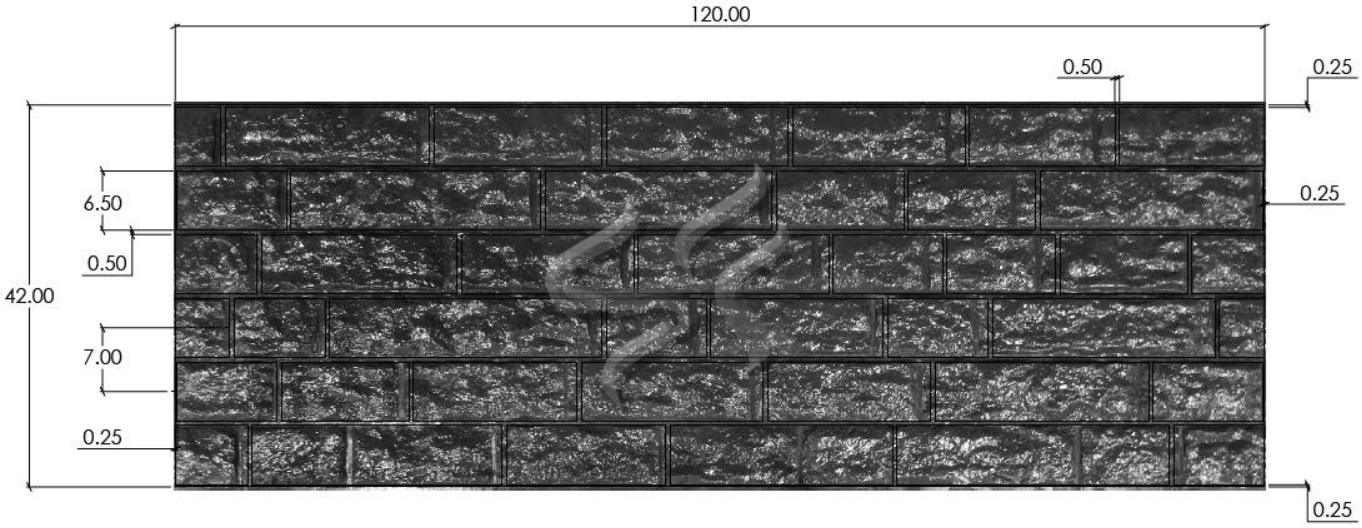

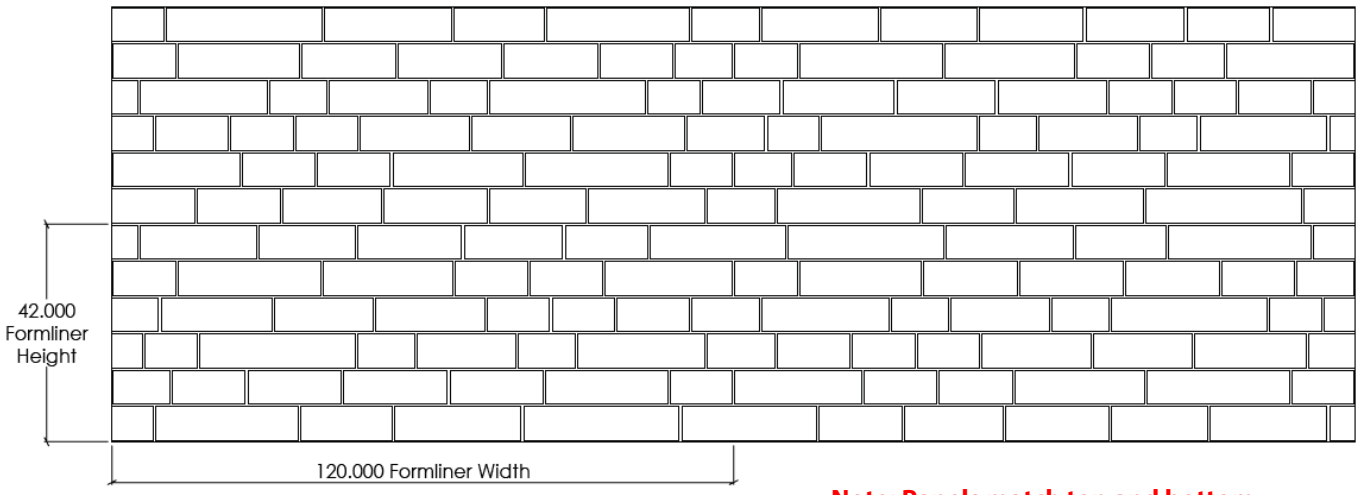

Note: Panels match top and bottom, side to side and rotated 180°.


Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460

Spec Formliners, Inc.
Impressive on Concrete


Pattern Number: **5563**

Coastal Basalt

2” (51mm) maximum relief

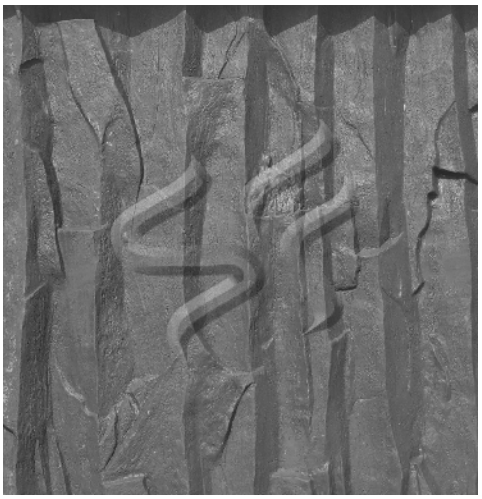

CONCRETE

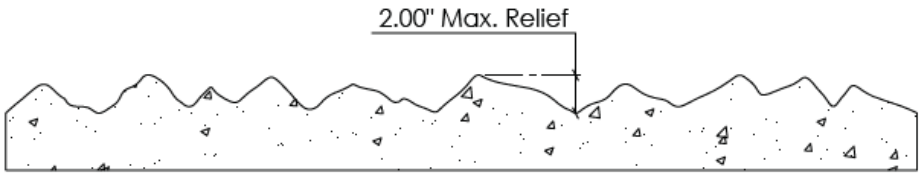

Visit **www.specformliners.com** for application guides and technical information

ThermoSpec[tm]
SINGLE OR MULTI-USE PLASTIC

Property	HIPS	ABS
Tensile D638	3700	5300
IFlexural D7905	-	9300
Hardness D786	-	105
Material Weights - lbs/ft^2		
0.070 MIL	0.110 MIL	0.150 MIL
0.393	0.621	0.843
Thicknesses Available		
0.070, 0.090, 0.110, 0.145, 0.155, 0.180		

ElastoSpec Lite[tm] Semi-Elastomeric
MULTI-USE MATERIAL

Property	ASTM	Rating
Shore A/D	D2240	40D/90A
Tensile	D412	1900 psi
Elongation	D412	300%
Tear Strength	D2370	23 MPa
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1/4" + Relief		

ElastoSpec[tm] 100% Solid Urethane
BONDED TO 3/4” PLYWOOD

Property	ASTM	Rating
Shore A	D2240	55-65
Tensile	D412	1400 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft^2		
Varies by Pattern		
Maximum Thickness		
1-1/8" + Relief		

Call for ThermoSpec[tm] Standard Panel Sizes on this pattern. Custom Sizes and Art Panels available
ElastoSpec[tm] Customized Panel Sizes and Art Panels

Spec Formliners, Inc. 1038 E 4th Street, Santa Ana, CA 92701
www.specformliners.com - Phone: 714 429-9500 - FAX: 714 429-1460