


Spec Formliners

INCORPORATED

Pattern Number: **1403**

8" x 8" Split Face Block

8" x 8" split face block, stacked bond
3/8" mortar joint

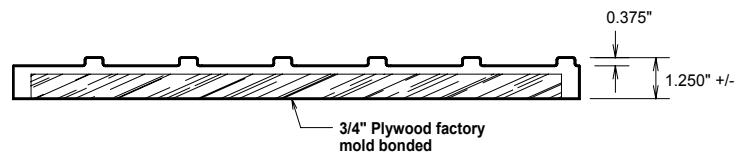

GENERAL INFORMATION

ATTACHMENT TO FORMWORK – Liners are attached to the form using TEK screws through the face of the liner spaced 12" C-C. Optional form mounting T-nuts embedded through the plywood backing is available for Elastospec panels.

FORM RELEASE – Apply with low flow, wide angle, flat spray nozzle and wipe with a cloth to insure a complete even coat to the entire form liner surface. Do not over apply form release agent. Protect treated form liners from precipitation, dust, and debris. Do not apply to reinforcing steel. **Dayton Superior Liner Coat? (J-4 LC)** form release, or equal, is approved for all form liner materials.

TECHNICAL SUPPORT – Contact Spec Formliners, Inc. 888 429-9550

ThermoSpec™ Single Use HIGH IMPACT STYRENE

Property	ASTM	Rating
Tensile	D638	3,700
Izod Impact	D256	20
Vicat Softening	D1525	212
Material Weights - lbs/ft²		
0.070 MIL	0.090 MIL	0.150 MIL
0.393	0.506	0.843


ThermoSpec™ Multi-Use ABS REUSABLE PLASTIC

Property	ASTM	Rating
Tensile	D638	5,300
Flexural	D790	9,300
Hardness	D786	105
Material Weights - lbs/ft²		
0.110 MIL	0.150 MIL	0.200 MIL
0.621	0.847	1.129

ElastoSpec™ 100% Solid Urethane BONDED TO 3/4" PLYWOOD

Property	ASTM	Rating
Shore A	D2240	50-55
Tensile	D638	800 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft²		
Varies by Pattern		

ThermoSpec™ Standard Panel Sizes: 48" x 96" or 48" x 120" Custom Sizes and Art Panels available
ElastoSpec™ Customized Panel Sizes and Art Panels




Spec Formliners INCORPORATED


Pattern Number: **1404**

8" x 16" Smooth Face Block

8" x 16" smooth face block, running bond
1/2" mortar joint

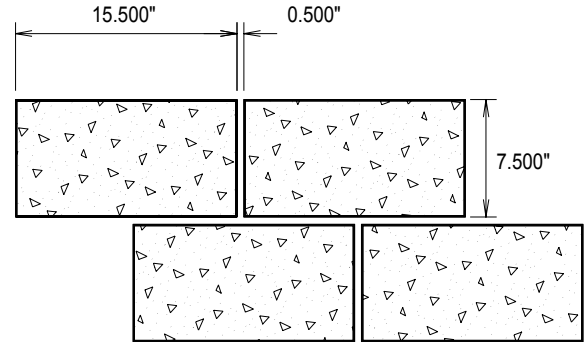

Note: Plastic panel is priced at 4' x 10' panel rate.
Trim is sized to 37-1/3 sq ft

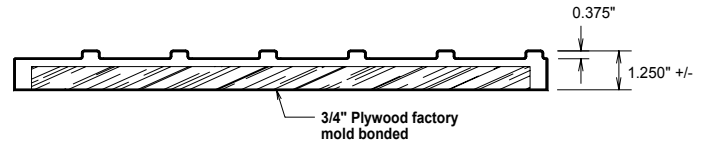

GENERAL INFORMATION

ATTACHMENT TO FORMWORK – Liners are attached to the form using TEK screws through the face of the liner spaced 12" C-C. Optional form mounting T-nuts embedded through the plywood backing is available for Elastospec panels.

FORM RELEASE – Apply with low flow, wide angle, flat spray nozzle and wipe with a cloth to insure a complete even coat to the entire form liner surface. Do not over apply form release agent. Protect treated form liners from precipitation, dust, and debris. Do not apply to reinforcing steel. **Dayton Superior Liner Coat? (J-4 LC)** form release, or equal, is approved for all form liner materials.

TECHNICAL SUPPORT – Contact Spec Formliners, Inc. 888 429-9550

ThermoSpec™ Single Use HIGH IMPACT STYRENE

Property	ASTM	Rating
Tensile	D638	3,700
Izod Impact	D256	20
Vicat Softening	D1525	212
Material Weights - lbs/ft²		
0.070 MIL	0.090 MIL	0.150 MIL
0.393	0.506	0.843

ThermoSpec™ Multi-Use ABS REUSABLE PLASTIC


Property	ASTM	Rating
Tensile	D638	5,300
Flexural	D790	9,300
Hardness	D786	105
Material Weights - lbs/ft²		
0.110 MIL	0.150 MIL	0.200 MIL
0.621	0.847	1.129

ElastoSpec™ 100% Solid Urethane BONDED TO 3/4" PLYWOOD

Property	ASTM	Rating
Shore A	D2240	50-55
Tensile	D638	800 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft²		
Varies by Pattern		

ThermoSpec™ Standard Panel Sizes: 48" x 96" or 48" x 120" Custom Sizes and Art Panels available

ElastoSpec™ Customized Panel Sizes and Art Panels






Spec Formliners INCORPORATED

Pattern Number: **1407**

8" x 16" Split Face Block

Standard split faced CMU block
3/8" mortar joint

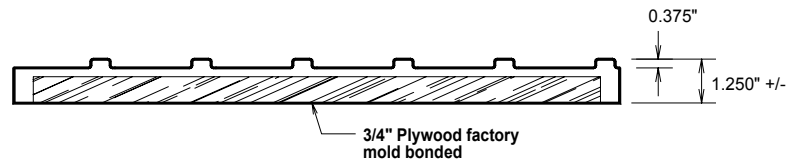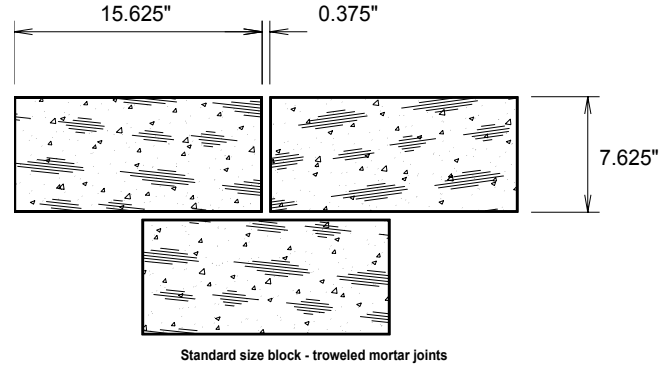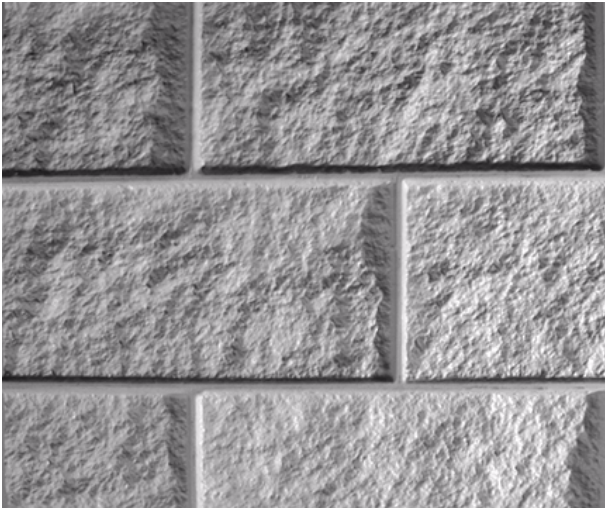

GENERAL INFORMATION

ATTACHMENT TO FORMWORK – Liners are attached to the form using TEK screws through the face of the liner spaced 12" C-C. Optional form mounting T-nuts embedded through the plywood backing is available for Elastospec panels.

FORM RELEASE – Apply with low flow, wide angle, flat spray nozzle and wipe with a cloth to insure a complete even coat to the entire form liner surface. Do not over apply form release agent. Protect treated form liners from precipitation, dust, and debris. Do not apply to reinforcing steel. **Dayton Superior Liner Coat? (J-4 LC)** form release, or equal, is approved for all form liner materials.

TECHNICAL SUPPORT – Contact Spec Formliners, Inc. 888 429-9550

ThermoSpec™ Single Use HIGH IMPACT STYRENE

Property	ASTM	Rating
Tensile	D638	3,700
Izod Impact	D256	20
Vicat Softening	D1525	212
Material Weights - lbs/ft²		
0.070 MIL	0.090 MIL	0.150 MIL
0.393	0.506	0.843

ThermoSpec™ Multi-Use ABS REUSABLE PLASTIC


Property	ASTM	Rating
Tensile	D638	5,300
Flexural	D790	9,300
Hardness	D786	105
Material Weights - lbs/ft²		
0.110 MIL	0.150 MIL	0.200 MIL
0.621	0.847	1.129

ElastoSpec™ 100% Solid Urethane BONDED TO 3/4" PLYWOOD

Property	ASTM	Rating
Shore A	D2240	50-55
Tensile	D638	800 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft²		
Varies by Pattern		

ThermoSpec™ Standard Panel Sizes: 48" x 96" or 48" x 120" Custom Sizes and Art Panels available

ElastoSpec™ Customized Panel Sizes and Art Panels




Spec Formliners INCORPORATED

Pattern Number: **1409**

8" x 16" Split Face Stacked Bond

8" x 16" split face block, stacked bond
3/8" mortar joints

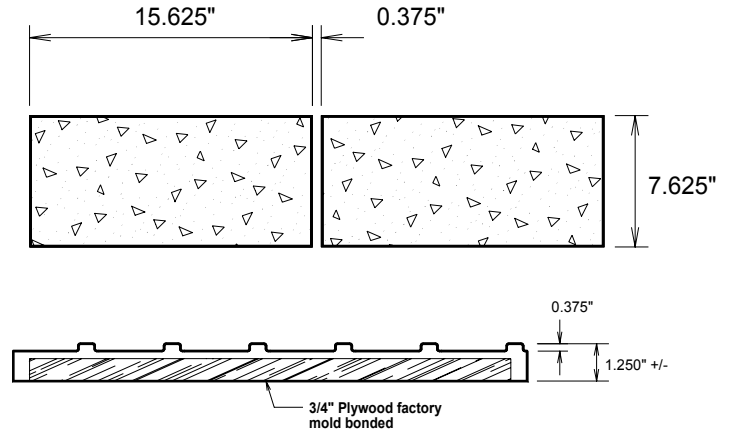

GENERAL INFORMATION

ATTACHMENT TO FORMWORK – Liners are attached to the form using TEK screws through the face of the liner spaced 12" C-C. Optional form mounting T-nuts embedded through the plywood backing is available for Elastospec panels.

FORM RELEASE – Apply with low flow, wide angle, flat spray nozzle and wipe with a cloth to insure a complete even coat to the entire form liner surface. Do not over apply form release agent. Protect treated form liners from precipitation, dust, and debris. Do not apply to reinforcing steel. **Dayton Superior Liner Coat? (J-4 LC)** form release, or equal, is approved for all form liner materials.

TECHNICAL SUPPORT – Contact Spec Formliners, Inc. 888 429-9550

ThermoSpec™ Single Use HIGH IMPACT STYRENE

Property	ASTM	Rating
Tensile	D638	3,700
Izod Impact	D256	20
Vicat Softening	D1525	212
Material Weights - lbs/ft²		
0.070 MIL	0.090 MIL	0.150 MIL
0.393	0.506	0.843

ThermoSpec™ Multi-Use ABS REUSABLE PLASTIC


Property	ASTM	Rating
Tensile	D638	5,300
Flexural	D790	9,300
Hardness	D786	105
Material Weights - lbs/ft²		
0.110 MIL	0.150 MIL	0.200 MIL
0.621	0.847	1.129

ElastoSpec™ 100% Solid Urethane BONDED TO 3/4" PLYWOOD

Property	ASTM	Rating
Shore A	D2240	50-55
Tensile	D638	800 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft²		
Varies by Pattern		

ThermoSpec™ Standard Panel Sizes: 48" x 96" or 48" x 120" Custom Sizes and Art Panels available

ElastoSpec™ Customized Panel Sizes and Art Panels




Spec Formliners INCORPORATED

Pattern Number: **1413**

8 x 8 Standard CMU Block

Standard 8" x 8" smooth CMU block
3/8" mortar joint

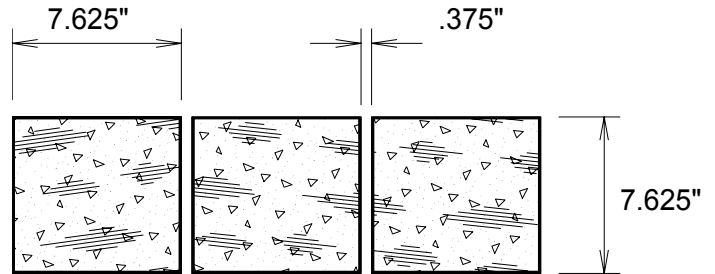

GENERAL INFORMATION

ATTACHMENT TO FORMWORK – Liners are attached to the form using TEK screws through the face of the liner spaced 12" C-C. Optional form mounting T-nuts embedded through the plywood backing is available for Elastospec panels.

FORM RELEASE – Apply with low flow, wide angle, flat spray nozzle and wipe with a cloth to insure a complete even coat to the entire form liner surface. Do not over apply form release agent. Protect treated form liners from precipitation, dust, and debris. Do not apply to reinforcing steel. **Dayton Superior Liner Coat? (J-4 LC)** form release, or equal, is approved for all form liner materials.

TECHNICAL SUPPORT – Contact Spec Formliners, Inc. 888 429-9550

ThermoSpec™ Single Use HIGH IMPACT STYRENE

Property	ASTM	Rating
Tensile	D638	3,700
Izod Impact	D256	20
Vicat Softening	D1525	212
Material Weights - lbs/ft²		
0.070 MIL	0.090 MIL	0.150 MIL
0.393	0.506	0.843


ThermoSpec™ Multi-Use ABS REUSABLE PLASTIC

Property	ASTM	Rating
Tensile	D638	5,300
Flexural	D790	9,300
Hardness	D786	105
Material Weights - lbs/ft²		
0.110 MIL	0.150 MIL	0.200 MIL
0.621	0.847	1.129

ElastoSpec™ 100% Solid Urethane BONDED TO 3/4" PLYWOOD

Property	ASTM	Rating
Shore A	D2240	50-55
Tensile	D638	800 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft²		
Varies by Pattern		

ThermoSpec™ Standard Panel Sizes: 48" x 96" or 48" x 120" Custom Sizes and Art Panels available
ElastoSpec™ Customized Panel Sizes and Art Panels





Spec Formliners

INCORPORATED

Pattern Number: **1425**

Canon Bond Block

Three block sizes in running bond with split faced texture

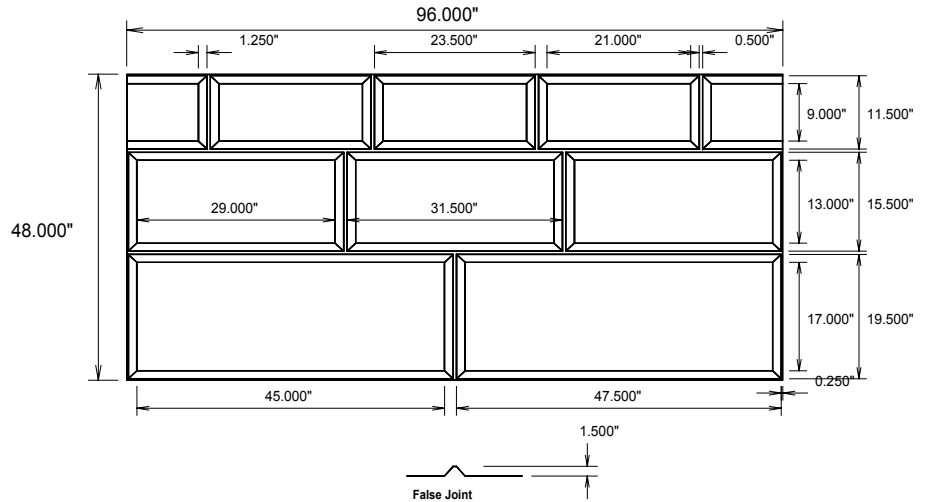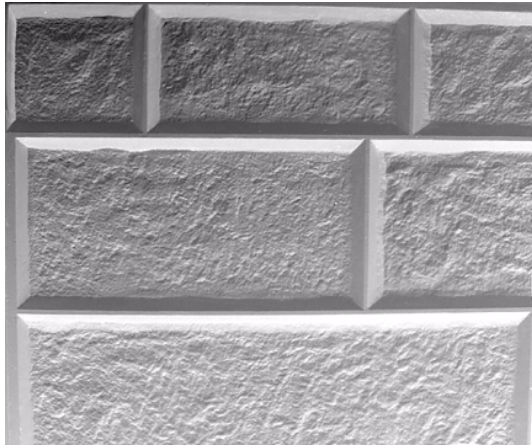

GENERAL INFORMATION

ATTACHMENT TO FORMWORK – Liners are attached to the form using TEK screws through the face of the liner spaced 12" C-C. Optional form mounting T-nuts embedded through the plywood backing is available for Elastospec panels.

FORM RELEASE – Apply with low flow, wide angle, flat spray nozzle and wipe with a cloth to insure a complete even coat to the entire form liner surface. Do not over apply form release agent. Protect treated form liners from precipitation, dust, and debris. Do not apply to reinforcing steel. **Dayton Superior Liner Coat? (J-4 LC)** form release, or equal, is approved for all form liner materials.

TECHNICAL SUPPORT – Contact Spec Formliners, Inc. 888 429-9550

ThermoSpec™ Single Use HIGH IMPACT STYRENE

Property	ASTM	Rating
Tensile	D638	3,700
Izod Impact	D256	20
Vicat Softening	D1525	212
Material Weights - lbs/ft²		
0.070 MIL	0.090 MIL	0.150 MIL
0.393	0.506	0.843

ThermoSpec™ Multi-Use ABS REUSABLE PLASTIC


Property	ASTM	Rating
Tensile	D638	5,300
Flexural	D790	9,300
Hardness	D786	105
Material Weights - lbs/ft²		
0.110 MIL	0.150 MIL	0.200 MIL
0.621	0.847	1.129

ElastoSpec™ 100% Solid Urethane BONDED TO 3/4" PLYWOOD

Property	ASTM	Rating
Shore A	D2240	50-55
Tensile	D638	800 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft²		
Varies by Pattern		

ThermoSpec™ Standard Panel Sizes: 48" x 96" or 48" x 120" Custom Sizes and Art Panels available

ElastoSpec™ Customized Panel Sizes and Art Panels



Spec Formliners

I N C O R P O R A T E D

Pattern Number: **1429**

Split Rib Block

8" x 16" split rib (CMU) block

GENERAL INFORMATION

ATTACHMENT TO FORMWORK – Liners are attached to the form using TEK screws through the face of the liner spaced 12" C-C. Optional form mounting T-nuts embedded through the plywood backing is available for Elastospec panels.

FORM RELEASE – Apply with low flow, wide angle, flat spray nozzle and wipe with a cloth to insure a complete even coat to the entire form liner surface. Do not over apply form release agent. Protect treated form liners from precipitation, dust, and debris. Do not apply to reinforcing steel. **Dayton Superior Liner Coat? (J-4 LC)** form release is approved for all form liner materials.

TECHNICAL SUPPORT – Contact Spec Formliners, Inc. 888 429-9550



8" x 16" split rib block - ribs average depth 3/4" - mortar joint average 1/2" depth. 4' x 8' panels.

ThermoSpec™ Single Use HIGH IMPACT STYRENE

Property	ASTM	Rating
Tensile	D638	3,700
Izod Impact	D256	20
Vicat Softening	D1525	212
Material Weights - lbs/ft²		
0.070 MIL	0.090 MIL	0.150 MIL
0.393	0.506	0.843

ThermoSpec™ Multi-Use ABS REUSABLE PLASTIC

Property	ASTM	Rating
Tensile	D638	5,300
Flexural	D790	9,300
Hardness	D786	105
Material Weights - lbs/ft²		
0.110 MIL	0.150 MIL	0.200 MIL
0.621	0.847	1.129

ElastoSpec™ 100% Solid Urethane BONDED TO 3/4" PLYWOOD

Property	ASTM	Rating
Shore A	D2240	50-55
Tensile	D638	800 psi
Elongation	D638	600%
Tear Strength	D624	200 pli
Material Weights - lbs/ft²		
Varies by Pattern		

ThermoSpec™ Standard Panel Sizes: 48" x 96" or 48" x 120" Custom Sizes and Art Panels available
ElastoSpec™ Customized Panel Sizes and Art Panels