

Z-FURRING


100Z25GA

Product Description

1.00" Z-FURRING 25GA
G40

Physical Properties

| | |
|-----------------------|--------|
| Design Thickness (in) | 0.0188 |
| Height (in) | 1 |
| Leg 1 Length (in) | 1.25 |
| Leg 2 Length (in) | 0.75 |
| Yield Strength (ksi) | 33 |

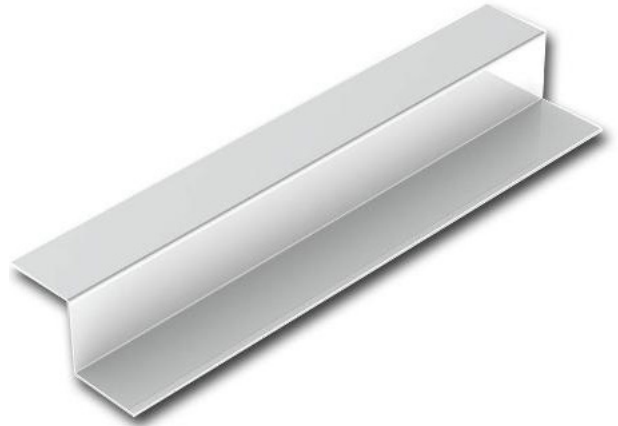

ASTM & Code Standards

- AISI North American Specification (NASPEC) 2001 Supplement
- Furring channel is produced to meet or exceed ASTM C645
- Galvanized sheet metal meets or exceeds requirements of ASTM A924 & A1003

Mill Steel Framing LEED Green Credits

- MR Credit 2** • Construction Waste Management – Mill Steel Framing steel framing is 100% recyclable
- MR Credit 4** • Recycled Content – Mill Steel Framing products contain no less than 25.5% post-consumer and 6.8% pre-consumer recycled content
- MR Credit 5** • Regional Materials – Mill Steel Framing has manufacturing facilities in Indiana, Alabama & Texas
- V4 MR Credits** • Building Product Disclosure and Optimization EPD (1 point)
- Materials Ingredients (1 point) – Construction and Demolition Waste Management (1 point)

