

Z-FURRING


250Z25GA

Product Description
Coating

2.50" Z-FURRING 25GA
G40

Physical Properties

Design Thickness (in)	0.0188
Height (in)	2.5
Leg 1 Length (in)	1.25
Leg 2 Length (in)	0.75
Yield Strength (ksi)	33

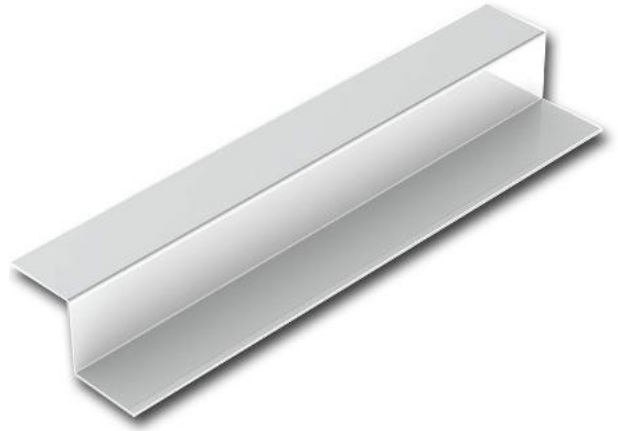

ASTM & Code Standards

- AISI North American Specification (NASPEC) 2001 Supplement
- Furring channel is produced to meet or exceed ASTM C645
- Galvanized sheet metal meets or exceeds requirements of ASTM A924 & A1003

Mill Steel Framing LEED Green Credits

- MR Credit 2** • Construction Waste Management – Mill Steel Framing steel framing is 100% recyclable
- MR Credit 4** • Recycled Content – Mill Steel Framing products contain no less than 25.5% post-consumer and 6.8% pre-consumer recycled content
- MR Credit 5** • Regional Materials – Mill Steel Framing has manufacturing facilities in Indiana, Alabama & Texas
- V4 MR Credits** • Building Product Disclosure and Optimization EPD (1 point)
- Materials Ingredients (1 point) – Construction and Demolition Waste Management (1 point)

