

CircleTrak®


Curved Wall Track

The Steel Network, Inc.
www.steelnetwork.com
1-888-474-4876



Material Composition

ASTM A1003/A1003M Structural Grade 33 (230) Type H, ST33H (ST230H): 33ksi (230MPa) minimum yield strength, 45ksi (310MPa) minimum tensile strength, 33mil minimum thickness (20 gauge, 0.0346" design thickness) with ASTM A653/A653M G60 (Z180) hot dipped galvanized coating

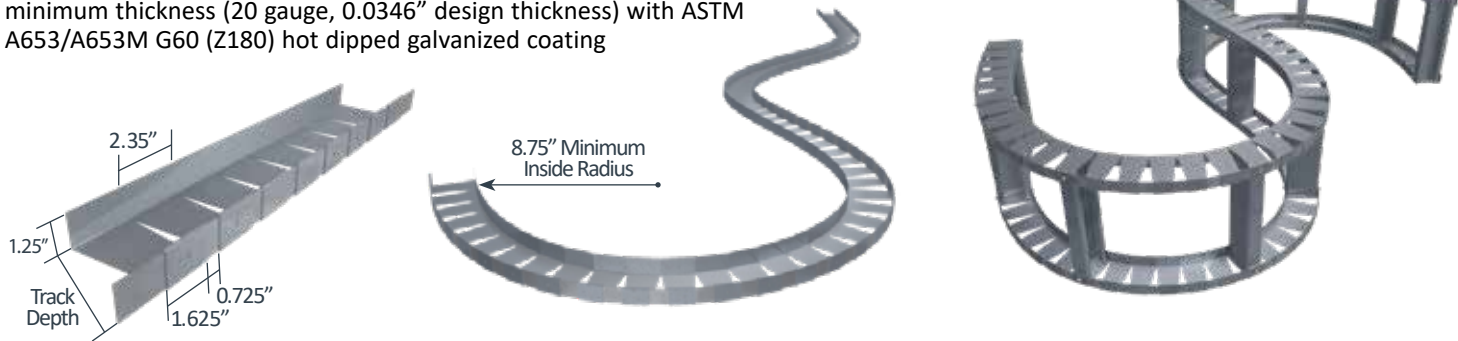

Product Designation	Thickness			
	Mils	Gauge	Design Thickness	
			in	mm
CircleTrak®	33	20	0.0346	0.878

Nomenclature

CircleTrak is available in 10' lengths and is designated by inside web depth x 100, then style (CT), followed by leg length and then material thickness in mils. Circletrak comes in standard 2.5, 3.5, 3.63, 5.5 and 6" web depths.

Example: 6" inside web depth
Designate: 600CT125-33

Example Details

