

PrimeWall® Drywall Accesories


162T125-18

Overall Depth

Track Section

Flange Width

Material Thickness

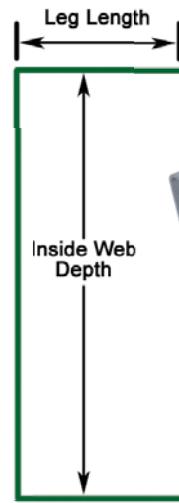

Material Composition

ASTM A1003/A 1003M Non Structural

Grade 33 (230), 33 ksi (230 MPa)

minimum yield strength, G40 (Z120)

hot-dipped galvanized coating, or equivalent conforming to ASTM C645. Other steel materials with G40 coating are also available upon request.

Important Table Notes

- Calculated properties are based on AISI S100-07, North American Specification for the Design of Cold-Formed Steel Structural Members.
- The centerline bend radius is based upon inside corner radii shown in the Thickness Table in SFIA Technical Guide for Cold-Formed Steel Framing Products.
- Effective properties incorporate the strength increase from the cold work of forming as applicable per AISI S100-07 Sec. A7.2.
- Tabulated gross properties, including torsional properties, are based upon full-unreduced cross section of the tracks.
- For deflection calculations, use the effective moment of inertia.

Non-Structural PrimeWall® Track Section Properties

Section	Design Thickness (in)	Gross						Effective - 33ksi					Torsional						
		Area (in ²)	Weight (lb/ft)	I _x (in ⁴)	S _x (in ³)	R _x (in)	I _y (in ⁴)	R _y (in)	I _x (in ⁴)	S _x (in ³)	M _a (in-k)	V _{ag} (lb)	Jx1000 (in ⁴)	C _w (in ⁶)	X _o (in)	m (in)	R _o (in)	β	
162T125-18	0.0188	0.078	0.26	0.042	0.048	0.733	0.013	0.411	0.030	0.025	0.50	302	0.009	0.007	-0.876	0.503	1.215	0.479	
162T125-27	0.0283	0.117	0.40	0.063	0.072	0.735	0.020	0.410	0.051	0.044	0.87	541	0.031	0.010	-0.872	0.501	1.211	0.482	
162T125-30	0.0312	0.129	0.44	0.070	0.079	0.735	0.022	0.409	0.057	0.050	1.00	597	0.042	0.012	-0.870	0.500	1.210	0.483	
250T125-18	0.0188	0.094	0.32	0.104	0.079	1.052	0.015	0.400	0.078	0.044	0.88	245	0.011	0.018	-0.767	0.460	1.362	0.682	
250T125-27	0.0283	0.141	0.48	0.157	0.119	1.053	0.022	0.398	0.129	0.079	1.56	685	0.038	0.027	-0.763	0.457	1.360	0.685	
250T125-30	0.0312	0.156	0.53	0.173	0.131	1.053	0.025	0.397	0.145	0.090	1.77	832	0.051	0.030	-0.762	0.456	1.359	0.686	
350T125-18	0.0188	0.113	0.38	0.220	0.121	1.395	0.017	0.382	0.174	0.062	1.22	173	0.013	0.038	-0.675	0.418	1.596	0.821	
350T125-27	0.0283	0.170	0.58	0.331	0.182	1.396	0.025	0.381	0.277	0.128	2.53	590	0.045	0.057	-0.670	0.416	1.595	0.823	
350T125-30	0.0312	0.187	0.64	0.365	0.200	1.396	0.027	0.380	0.312	0.145	2.86	790	0.061	0.063	-0.669	0.415	1.594	0.824	
362T125-18	0.0188	0.115	0.39	0.238	0.127	1.437	0.017	0.380	0.189	0.064	1.26	167	0.014	0.042	-0.665	0.413	1.628	0.833	
362T125-27	0.0283	0.173	0.59	0.358	0.191	1.438	0.025	0.378	0.301	0.135	2.66	569	0.046	0.062	-0.661	0.411	1.627	0.835	
362T125-30	0.0312	0.191	0.65	0.395	0.210	1.438	0.027	0.378	0.339	0.152	3.01	762	0.062	0.068	-0.659	0.410	1.627	0.836	
400T125-18'	0.0188	0.122	0.42	0.298	0.145	1.562	0.017	0.374	0.241	0.070	1.39	151	0.014	0.052	-0.637	0.400	1.727	0.864	
400T125-27	0.0283	0.184	0.63	0.449	0.217	1.562	0.025	0.372	0.380	0.156	3.08	515	0.049	0.078	-0.633	0.398	1.726	0.866	
400T125-30	0.0312	0.203	0.69	0.495	0.239	1.563	0.028	0.371	0.427	0.176	3.49	689	0.066	0.085	-0.632	0.397	1.726	0.866	
550T125-27	0.0283	0.226	0.77	1.045	0.336	2.046	0.027	0.348	0.786	0.192	3.79	372	0.060	0.160	-0.543	0.352	2.146	0.936	
550T125-30	0.0312	0.250	0.85	1.159	0.371	2.047	0.030	0.347	0.897	0.226	4.47	499	0.081	0.176	-0.542	0.351	2.145	0.936	
600T125-27'	0.0283	0.241	0.82	1.169	0.381	2.204	0.028	0.340	0.958	0.211	4.16	341	0.064	0.196	-0.519	0.339	2.290	0.949	
600T125-30	0.0312	0.265	0.90	1.288	0.420	2.204	0.031	0.340	1.095	0.249	4.92	456	0.086	0.215	-0.518	0.338	2.290	0.949	

¹ Web height to thickness ratio exceeds 200. Web stiffeners are required at all support points and concentrated loads.