


**Material Properties**

ASTM A1003/A1003M Structural Grade 50 (340) Type H, ST50H (ST340H): 50ksi (340MPa) minimum yield strength, 65ksi(450MPa) minimum tensile strength, with ASTM A653/A653M G90 (Z275) hot dipped galvanized coating. Available in 33mil minimum thickness (20 gauge, 0.0346" design thickness) or 54mil minimum thickness (16 gauge, 0.0566" design thickness).

**Thermal Tape:** Thickness 1/16", Density 25 lbs/ft<sup>3</sup> (ASTM D3574), Thermal Conductivity k-factor 0.3 Btu-in/hour-ft<sup>2</sup>-°F (ASTM C518)

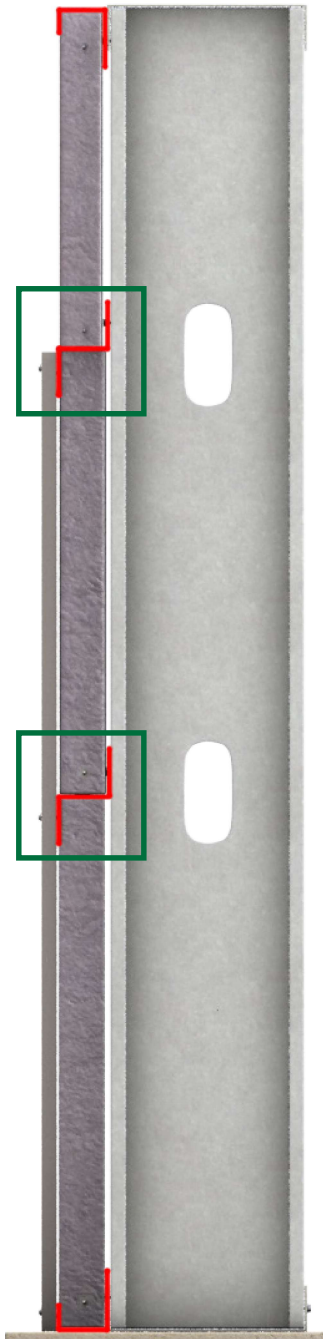

ThermaFast Z-Track is installed between every 24" rigid foam insulation.

ThermaFast® Z-Track Product Profile								
Section	Leg 1 Length (in)	Leg 2 Length (in)	Rigid Foam Insulation Depth (in)	Gauge (ga)	Design Thickness (in)	Min Steel Thickness (in)	Inside Bend Radius (R)	Unit Weight (lbs/ft)
100ZT-33, 50ksi	1.5	1.5	1.0	20	0.0346	0.0329	0.0625	0.47
150ZT-33, 50ksi			1.5					0.50
200ZT-33, 50ksi			2.0					0.53
300ZT-33, 50ksi			3.0					0.65
400ZT-33, 50ksi			4.0					0.76
100ZT-54, 50ksi	1.5	1.5	1.0	16	0.0566	0.0538	0.0625	0.76
150ZT-54, 50ksi			1.5					0.81
200ZT-54, 50ksi			2.0					0.85
300ZT-54, 50ksi			3.0					1.05
400ZT-54, 50ksi			4.0					1.24

ThermaFast® Z-Track Section Properties		
Section	M <sub>xa</sub> (kips-in)	M <sub>ya</sub> (kips-in)
100ZT-33, 50ksi	0.78	0.74
150ZT-33, 50ksi	0.78	1.33
200ZT-33, 50ksi	0.78	1.75
300ZT-33, 50ksi	0.78	2.81
400ZT-33, 50ksi	0.78	3.96
100ZT-54, 50ksi	1.86	1.65
150ZT-54, 50ksi	1.86	3.13
200ZT-54, 50ksi	1.86	4.22
300ZT-54, 50ksi	1.86	6.80
400ZT-54, 50ksi	1.86	9.64

**Table Notes:**

- M<sub>xa</sub> is the ASD moment capacity in the gravity load direction based on 24" o.c. fastening to stud max.
- M<sub>ya</sub> is the ASD moment capacity in the wind load direction based on 24" o.c. fastening to stud max.
- Attach track with minimum one #10-16 self-drilling screws to each stud. (2) screws may be required for high design wind pressures (higher than 30 psf service level)
- Refer to project specification and/or architectural sections for wall assembly details related to fire and acoustical performance as well as water resistance.