



PANGO® SEALANT FORM



A STEGO INDUSTRIES, LLC INNOVATION | VAPOR BARRIER 31 31 16, 07 26 00, 03 30 00 | VERSION: MAY 2 2025

1. PRODUCT NAME

PANGO SEALANT FORM

2. MANUFACTURER

Stego Industries, LLC
216 Avenida Fabricante, Suite 101
San Clemente, CA 92672
Sales, Technical Assistance
Ph: (877) 464-7834
contact@stegoindustries.com
stegoindustries.com

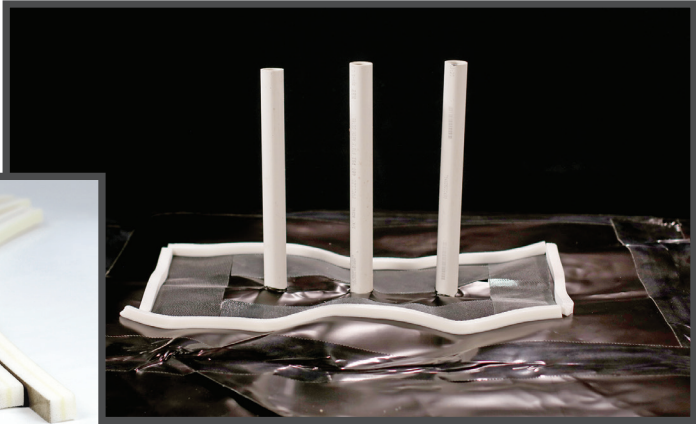

3. PRODUCT DESCRIPTION

USES: Pango Sealant Form is designed to be used in conjunction with Pango® Wrap, Pango® Sealant, and Pango Claw®; it is engineered to adhere to Pango Wrap and provide a confined area in which Pango Sealant can be placed for sealing around penetrations in Pango Wrap.

COMPOSITION: Pango Sealant Form is a low-density, cross-linked, closed-cell polyethylene foam with an acrylic, pressure-sensitive adhesive.

SIZE: 1/2" x 1/2" x 24"

FEATURES AND BENEFITS: Pango Sealant Form ships 200 pieces in a case (10 boxes of 20 pieces) | Highly conformable | Easy to trim to desired length | Excellent adhesion to Pango Wrap | Made in the USA

4. TECHNICAL DATA

TABLE 4.1: PHYSICAL PROPERTIES OF PANGO SEALANT FORM

PROPERTY	RESULTS
Dimensions	1/2" x 1/2" x 24"
Color	White
Weight	0.11 oz (3.1 grams)

PANGO® SEALANT FORM

A STEGO INDUSTRIES, LLC INNOVATION | VAPOR BARRIER 31 31 16, 07 26 00, 03 30 00 | VERSION: MAY 2, 2025

5. INSTALLATION

PENETRATIONS: Make sure the area of adhesion is free of dust, dirt, debris, moisture, and frost to allow maximum adhesion. Pango Sealant Form should be used in conjunction with Pango Claw when sealing around penetrations with Pango Sealant. When ready to apply Pango Sealant Form, remove the release liner and press Pango Sealant Form firmly against Pango Wrap and along the outer edge of Pango Claw, following its path while not overlapping its textured surface. Conversely, install Pango Sealant Form first and subsequently apply Pango Claw along the form's interior edge. Pour Pango Sealant completely inside of the Pango Sealant Form to create a seal around the encompassed penetrations.

Install Pango Sealant Form between 40°F and 110°F. Do not exceed 7 days between Pango Sealant Form installation and concrete placement or full protection from UV and weather exposure.

For additional information, please refer to Pango's complete installation instructions.

6. AVAILABILITY & COST

For cost and availability of Pango Sealant Form, please contact your local Stego® Sales Representative.

7. WARRANTY

Stego believes to the best of its knowledge, that specifications and recommendations herein are accurate and reliable. However, since site conditions are not within its control, Stego does not guarantee results from the use of the information provided herein. Stego offers a limited warranty on Pango Sealant Form. Please see stegoindustries.com/legal

8. MAINTENANCE AND STORAGE

Maintenance: None required.

Storage and Handling: Store Pango Sealant Form in a dry and temperate indoor area.

Please refer to the Safety Data Sheet (SDS) for detailed safety, storage, and handling procedures.

9. TECHNICAL SERVICES

Technical advice, custom CAD drawings, and additional information can be obtained by contacting Stego or by visiting the website.

Email: contact@stegoindustries.com

Contact Number: (877) 464-7834

Website: stegoindustries.com

10. FILING SYSTEMS: stegoindustries.com

