



# STEGOCRAWL® TAPE


A STEGO INDUSTRIES, LLC INNOVATION | VAPOR RETARDERS 07 26 00 | VERSION: JUN 9, 2025

## 1. PRODUCT NAME

STEGOCRAWL TAPE

## 2. MANUFACTURER

Stego Industries, LLC  
216 Avenida Fabricante, Suite 101  
San Clemente, CA 92672  
Sales, Technical Assistance  
Ph: (877) 464-7834  
contact@stegoindustries.com  
stegoindustries.com

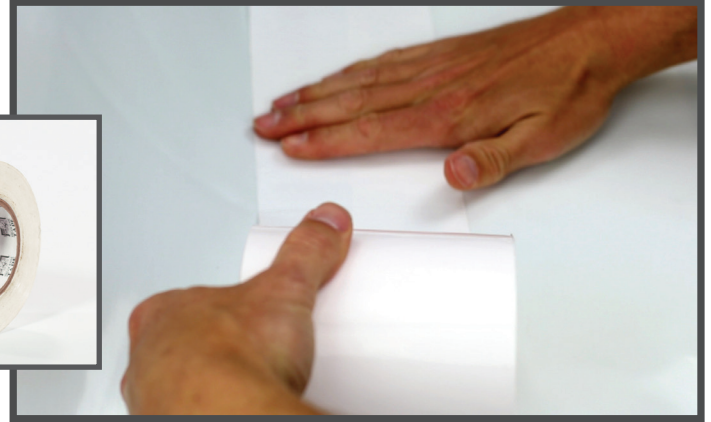

## 3. PRODUCT DESCRIPTION

**USES:** StegoCrawl Tape is a low permeance tape designed for protective sealing, seaming, and patching applications where a highly conformable material is required. StegoCrawl Tape is engineered to bond to StegoCrawl® Wrap.

**COMPOSITION:** StegoCrawl Tape is composed of polyethylene film and an acrylic, pressure-sensitive adhesive.

### FEATURES AND BENEFITS:

- **Roll Size: 3.75" x 180'**
- **Ships 12 rolls in a case**
- **Extremely low permeance**
- **Great long-term adhesion**
- **8 mils thick – superb durability**
- **White color complements the white StegoCrawl encapsulation system**
- **Low VOC Emissions - Certified Clean Air GOLD**
- **Made in the USA with US and Global materials**



## 4. TECHNICAL DATA

### APPLICABLE STANDARDS:

Pressure Sensitive Tape Council (PSTC)

- PSTC 101 – International Standard for Peel Adhesion of Pressure Sensitive Tape
- PSTC 16 – International Standard for Loop Tack

**TABLE 1: PHYSICAL PROPERTIES OF STEGOCRAWL TAPE**

PROPERTY	TEST METHOD	RESULTS
Total Thickness		8 mil
Permeance		0.03 perms
Ultimate Tensile Strength	ASTM D882	28 lb/in width
Elongation (at break) MD	ASTM D882	995%
180° Peel Adhesion	PSTC 101 20 min dwell ss	115 oz/in width
	PSTC 101 20 min on HDPE	102 oz/in width

Note: perm unit = grains/(ft<sup>2</sup>\*hr\*in-Hg)

Continued...

Note – legal notice on page 2.

# STEGOCRAWL® TAPE

A STEGO INDUSTRIES, LLC INNOVATION | VAPOR RETARDERS 07 26 00 | VERSION: JUN 9, 2025

## 5. INSTALLATION

**SEAMS:** Overlap seams a minimum of six inches and seal with StegoCrawl Tape. Some codes require a minimum of a twelve inch overlap. Check appropriate codes prior to installation. Make sure the area of adhesion is free from dust, dirt, moisture and frost to allow maximum adhesion of the pressure-sensitive tape.

**SEALING AROUND PIPES:** Install StegoCrawl Wrap around pipe, minimizing the void space. Seal around base of pipe with StegoCrawl Tape.

StegoCrawl Tape should be installed above 40°F. In temperatures below 40°F, take extra care to remove moisture or frost from the area of adhesion. Do not exceed 7 days between StegoCrawl Tape installation and concrete placement or full protection from UV and weather exposure.

For additional information, please refer to StegoCrawl's complete installation instructions.

## 6. AVAILABILITY & COST

For cost and local availability of StegoCrawl Tape, please contact your local Stego® Sales Representative. For online ordering, visit: [shop.stegoindustries.com](https://shop.stegoindustries.com)

## 7. WARRANTY

Stego believes to the best of its knowledge, that specifications and recommendations herein are accurate and reliable. However, since site conditions are not within its control, Stego does not guarantee results from the use of the information provided herein. Stego does offer a limited warranty on StegoCrawl Wrap. Please see [stegoindustries.com/legal](https://stegoindustries.com/legal)

## 8. MAINTENANCE AND STORAGE

**Maintenance:** Check post-application. Replace or overlay areas that show wear.

**Storage and Handling:** Store in original packaging in cool, dry conditions. Ensure surfaces for application are clean for best adhesion.

Please refer to the Safety Data Sheet (SDS) for detailed safety, storage, and handling procedures.

## 9. TECHNICAL SERVICES

Technical advice, custom CAD drawings, and additional information can be obtained by contacting Stego or by visiting the website.

**Email:** [contact@stegoindustries.com](mailto:contact@stegoindustries.com)

**Contact Number:** (877) 464-7834

**Website:** [stegoindustries.com](https://stegoindustries.com)

## 10. FILING SYSTEMS: [stegoindustries.com](https://stegoindustries.com)

