

Formulated to Perform

INTERIOR FINISH PRODUCTS



**Specified
Technologies Inc.**

Firestop, Smoke, & Sound Solutions

Interior Finish Products

We understand the nuances of firestopping head-of-wall joints and other joint systems installed into or between wall systems.




We offer flexible joint sealants and sprays or gasket materials that allow for dynamic movement. All of our systems are fully tested according to ANSI/UL2079, ASTM E1966, ASTM E1399, ULC-S115, EN 1366-4, and other relevant standards relating to movement and fire testing of joint systems.

- Versatility of Spray
- Caulk and Spray Compatibility
- Dynamic Movement
- Penetrants in Head-of-Wall Joints
- CPVC Compatibility with Spray



SpecSeal
AS200



Elastomeric Spray

SpecSeal® AS200 Elastomeric Spray is a latex-based elastomeric firestop spray for construction joints and perimeter fire barrier applications. AS200 cures to form a durable seal that resists the passage of the products of combustion while accommodating for high dynamic joint movement.




SpeedFlex
SFJP



SpeedFlex® Joint Profile System

SpeedFlex® Joint Profile partners with SpecSeal® spray-applied coatings to provide unsurpassed joint movement capabilities in standard gypsum board construction. SpeedFlex® Joint Profile eliminates the need for traditional forming materials allowing for reduced application times increasing productivity.

SpecSeal
ES




Elastomeric Firestop Sealant

SpecSeal® ES Sealant is a latex-based gun grade elastomeric firestop sealant designed for construction joint applications. Once cured, ES Sealant forms a flexible shield against the passage of fire and smoke. In dynamic joint conditions, ES Sealant is tested to accommodate up to 25% compression/extension of the installed joint width.



SpeedFlex
TTG

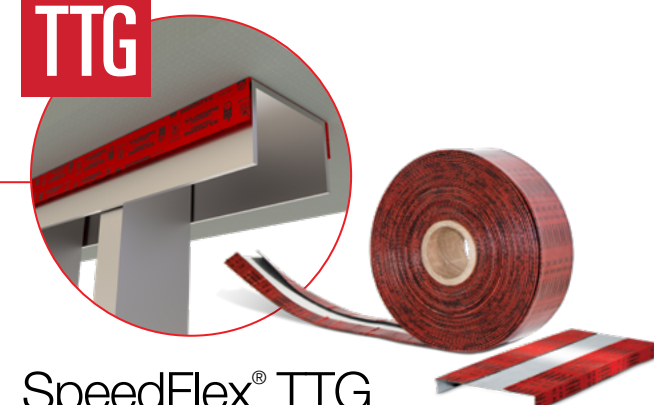

SpeedFlex® TTG Track Top Gasket


SpeedFlex® TTG Track Top Gasket makes short work of construction joints in gypsum board construction. TTG eliminates the need for firestop sealants or sprays by firestopping as the wall is constructed. Track Top Gasket is easily cut to length with scissors or a sharp knife, installing quick with no waste. Custom sizes available upon request.

SpecSeal
LC




Endothermic Sealant

SpecSeal® LC Endothermic Sealant is a latex-based gun grade firestop sealant for construction joints and non-combustible penetrations. After application, LC Sealant cures to form a flexible seal against the propagation of fire. Under fire exposure, LC absorbs heat and release water vapor resisting the progress of smoke and flame.



Smoke'N'Sound Acoustical Spray

SpecSeal® Smoke 'N' Sound spray is a high quality acrylic latex spray designed for static or minimally dynamic linear joints or gaps. Formulated to adhere to all common construction surfaces and can be applied using airless spray equipment or with a brush (for small applications and touch ups).



Smoke'N'Sound Acoustical Sealant

A high quality acrylic latex sealant designed for sealing through-penetrations (such as pipes, conduits, cabling, busways, and openings) and membrane penetrations (such as p-traps and outlet boxes) in smoke resistant walls.



SPECSEAL® SERIES AS200 ELASTOMERIC SPRAY - ORDERING INFORMATION

Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.	Weight (Each)
AS205	730573071076	Elastomeric Spray 5 Gallon Pail	1	1	53.60 lbs (24.31 kg)
AS205BR	730573071182	Elastomeric Spray 5 Gallon Pail (Brick Red)	1	1	53.60 lbs (24.31 kg)
AS205W	730573071229	Elastomeric Spray 5 Gallon Pail (Brick Red)	1	1	53.60 lbs (24.31 kg)

SPECSEAL® SPEEDFLEX® JOINT PROFILE - ORDERING INFORMATION

Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.	Weight (Each)
SFJP40	730573081440	Joint Profile	1	150 per box	0.21 lbs (0.10 kg)
SFJP80	730573081457	Joint Profile for Wider Joints	1	75 per box	0.42 lbs (0.19 kg)

SPECSEAL® SERIES ES ELASTOMERIC SEALANT - ORDERING INFORMATION

Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.	Weight (Each)
ES105	730573081051	5 Gal. Pail (19.0 liters) 1,155 cu.in.	1	N/A	63.30 lbs (28.71 kg)
ES105BR	730573952054	5 Gal. Pail (19.0 liters) 1,155 cu.in. - Brick Red	1	N/A	63.30 lbs (28.71 kg)
ES105GL	730573081143	5 Gal. Pail (19.0 liters) 1,155 cu.in. - Light Grey	1	N/A	63.30 lbs (28.71 kg)
ES120	730573081037	20 oz. Sausage (592 ml) 36 cu. in.	1	12	1.97 lbs (0.89 kg)
ES120BR	730573952061	20 oz. Sausage (592 ml) 36 cu. in. - Brick Red	1	12	1.97 lbs (0.89 kg)
ES129	730573081297	29 oz. Tube (858 ml) 52 cu. in.	1	10	3.05 lbs (1.38 kg)
ES129BR	730573952078	29 oz. Tube (858 ml) 52 cu. in. - Brick Red	1	10	3.05 lbs (1.38 kg)

SPEEDFLEX® TRACK TOP GASKET - GYPSUM WALLS ORDERING INFORMATION

Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.	Weight (Each)	Width
TTG350F	730573083550	TTG with folded legs for 3 1/2" (89 mm) or 3 5/8" (92mm) ceiling track - 2x 80.5' (24.5 meter) rolls	1	1	16.58 lbs (7.52 kg)	6.25" (159 mm)
TTG350FS	730573951996	TTG with folded legs for 3 1/2" (89 mm) or 3 5/8" (92mm) ceiling track - 2x 80.5' (24.5 meter) rolls, split	1	1	16.58 lbs (7.52 kg)	6.25" (159 mm)
TTG600F	730573086049	TTG with folded legs for 6" (152 mm) ceiling track - 2x 80.5' (24.5 meter) rolls	1	1	23.47 lbs (10.65 kg)	8.63" (219 mm)
TTG350F2	730573950937	TTG for 3.5" (89 mm) to 3-5/8" (92 mm) ceiling track with foam, 40.5 ft. (12.3 meter) roll	1	1	5.4 lbs (2.45 kg)	6.25" (159 mm)
TTG350F2S	730573951033	TTG for 3.5" (89 mm) to 3-5/8" (92 mm) ceiling track with foam, 40.5 ft. (12.3 meter) roll, factory split	1	1	5.5 lbs (2.50 kg)	6.25" (159 mm)
TTG600F2	730573950999	TTG for 6" (152 mm) ceiling track with foam, 40.5 ft. (12.3 meter) roll	1	1	7.5 lbs (3.40 kg)	8.63" (219 mm)

SPEEDFLEX® TRACK TOP GASKET - GYPSUM SHAFT WALLS ORDERING INFORMATION

Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.	Weight (Each)	Width
TTG250J	730573082508	TTG for 2.5" (63.5 mm) J-Runners - 150' (45.7 meter) roll	1	1	16.57 lbs (7.52 kg)	6.25" (159 mm)
TTG400J	730573084007	TTG for 4" (102 mm) J-Runners - 150' (45.7 meter) roll	1	1	18.62 lbs (8.45 kg)	7.50" (191 mm)
TTG600J	730573086025	TTG for 6" (152 mm) J-Runners - 150' (45.7 meter) roll	1	1	23.64 lbs (10.72 kg)	9.7" (248 mm)
TTG250J2	730573951019	TTG for 2.5" (63.5 mm) J-Runners with foam, 40.5 ft. (12.3 meter) roll	1	1	6.5 lbs (2.95 kg)	6.25" (159 mm)
TTG400J2	730573951057	TTG for 4" (102 mm) J-Runners with foam, 40.5 ft. (12.3 meter) roll	1	1	7.3 lbs (3.31 kg)	7.50" (191 mm)
TTG600J2	730573950975	TTG for 6" (152 mm) J-Runners with foam, 40.5 ft. (12.3 meter) roll	1	1	9.3 lbs (4.22 kg)	9.7" (248 mm)

SPECSEAL® LC ENDOTHERMIC FIRESTOP SEALANT - ORDERING INFORMATION

Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.	Weight (Each)
LC150	730573011300	Endothermic Firestop Sealant 10.1 oz Tube	1	12	0.96 lbs (0.44 kg)
LC120	730573011331	Endothermic Firestop Sealant 20 oz. Sausage	1	12	1.70 lbs (0.77 kg)
LC129	730573011317	Endothermic Firestop Sealant 29 oz. Tube	1	12	2.56 lbs (1.16 kg)
LC155	730573011355	Endothermic Firestop Sealant 5 gal. Pail	1	1	55.81 lbs (25.31 kg)

SPECSEAL® SMOKE 'N' SOUND SMOKE AND ACOUSTICAL SEALANT & SPRAY - ORDERING INFORMATION

Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.	Weight (Each)
SNS105W	730573111543	Smoke & Acoustical Sealant, 5 Gallon Pail	1	1	70.06 lbs (31.78 kg)
SNS120W	730573111512	Smoke & Acoustical Sealant, 20 oz. (592 ml) Sausage	1	12	2.11 lbs (0.96 kg)
SNS129W	730573111529	Smoke & Acoustical Sealant, 29 oz. (858 ml) Tube	1	12	3.29 lbs (1.49 kg)
SNS205	730573011553	Smoke & Acoustical Spray, 5 Gallon Pail	1	1	55.48 lbs (25.17 kg)

