

Formulated to Perform.

W O O D F R A M E P R O D U C T S





STI
Specified
Technologies Inc.

FIRESTOP


Residential Woodframe

Wood frame remains a very popular method of construction. Both cost-effective and sustainable, wood frame structures for residential multi-family, dormitories, senior housing, and more are prevalent. Building codes, including the International Building Code® (IBC) and Canada's National Building Code, include provisions for building out of wood, including structures up to five or six stories in height. As these structures soar to new heights, proper firestopping is essential, and we can help.

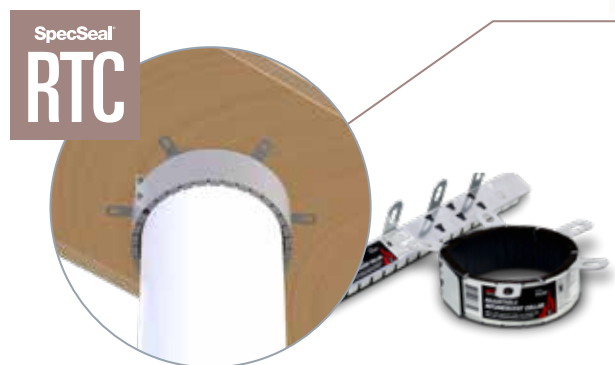



RTC Intumescent Firestop Collars

RTC Firestop Collars are adjustable collars sized for 3" and 4" trade size plastic pipes or 3" or 4" trade size plastic pipe couplings.

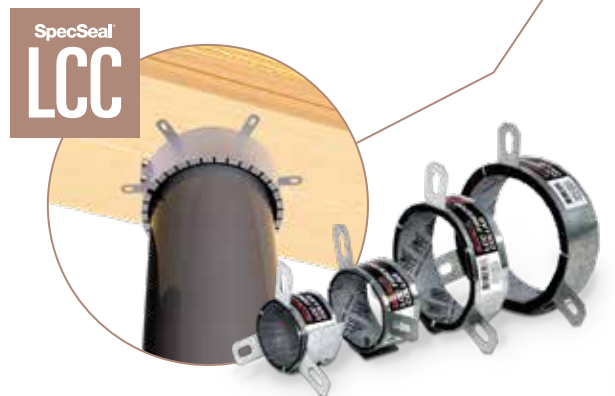

LCC Intumescent Firestop Collars

SpecSeal® LCC Firestop Collars are factory-manufactured firestop devices sized to plastic pipes of up to 4" Trade Size. LCC Collars consist of a restraining collar with a factory applied intumescent ensuring the correct amount of material is applied every time.

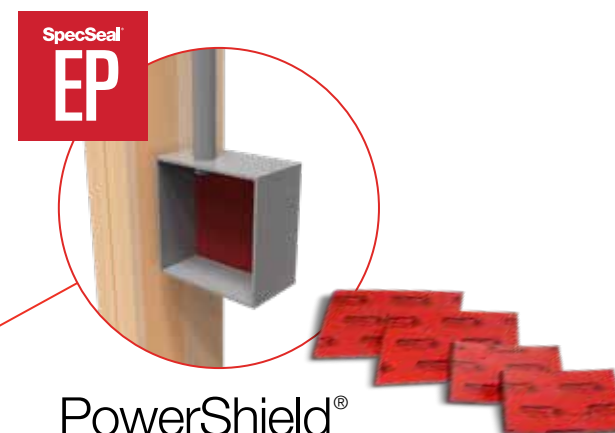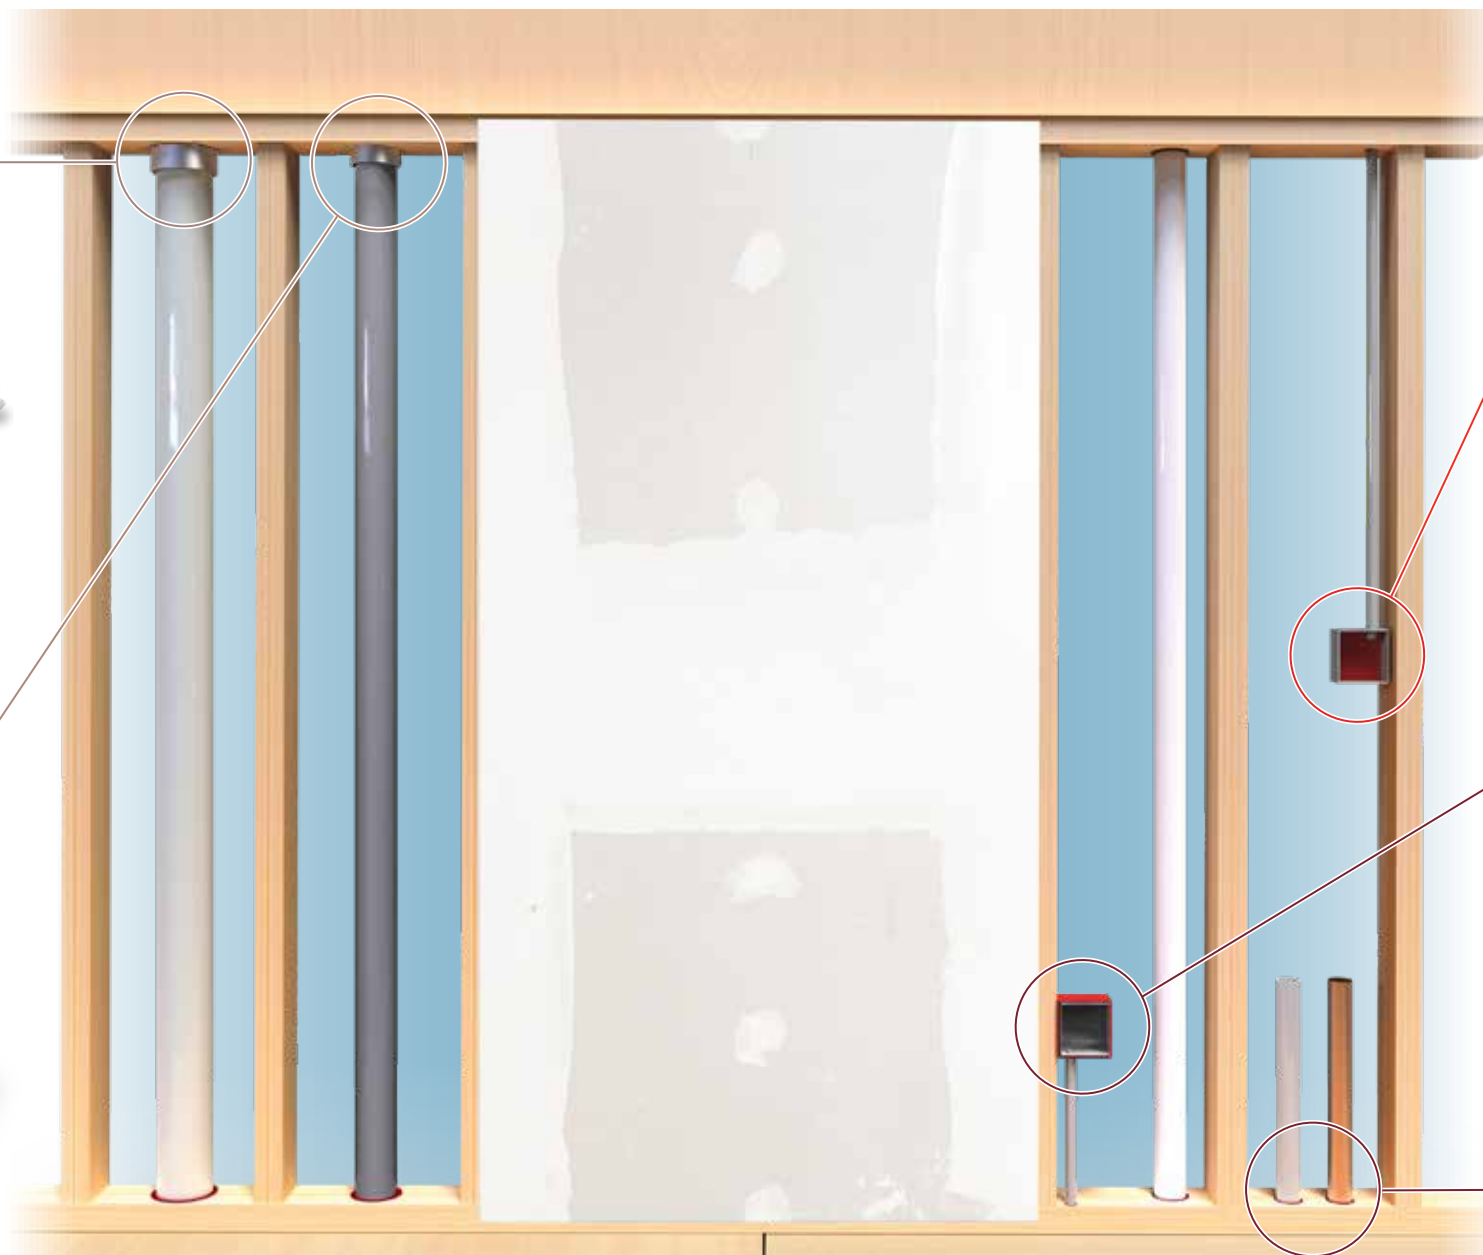

PowerShield® Electrical Box Insert

Electrical box inserts install inside electrical boxes to prevent the spread of fire from room-to-room. Box inserts can be installed onsite or at a fab shop so that boxes show up pre-firestopped.



Putty Pads

SpecSeal® SSP Firestop Putty Pads consist of non-hardening putty that can be used to seal the outside surfaces of electrical boxes. In addition to fire protection, they provide optimal sound attenuation.

Intumescent Firestop Caulk

WF300 Intumescent Firestop Caulk is a latex-based firestop caulk designed for residential wood frame construction. WF300 Caulk is tested for addressing penetrations through wood/frame construction such as wood stud walls and floor/ceiling assemblies. Under fire exposure, WF300 expands to up to four times its original volume.



non-fire-rated



SmokeBlock® Fireblock & Draftstop Caulk


SmokeBlock® Caulk is a non-combustible gun grade sealer for fireblocking and draftstopping in non-fire-rated wood frame walls and floors. It meets ASTM E136. Not suitable for use in fire-rated construction.



SmokeBlock® Fireblock Foam

SmokeBlock® Fireblocking Foam installs in seconds filling voids and annular spaces around penetrants preventing the spread of smoke and toxic gasses. SmokeBlock® Fireblocking Foam can be applied in both vertical and horizontal applications and is suitable to use in one and two family dwellings. Not suitable for use in fire-rated construction.

For more information visit www.stfirestop.com or contact your local sales representative at 800-992-1180.

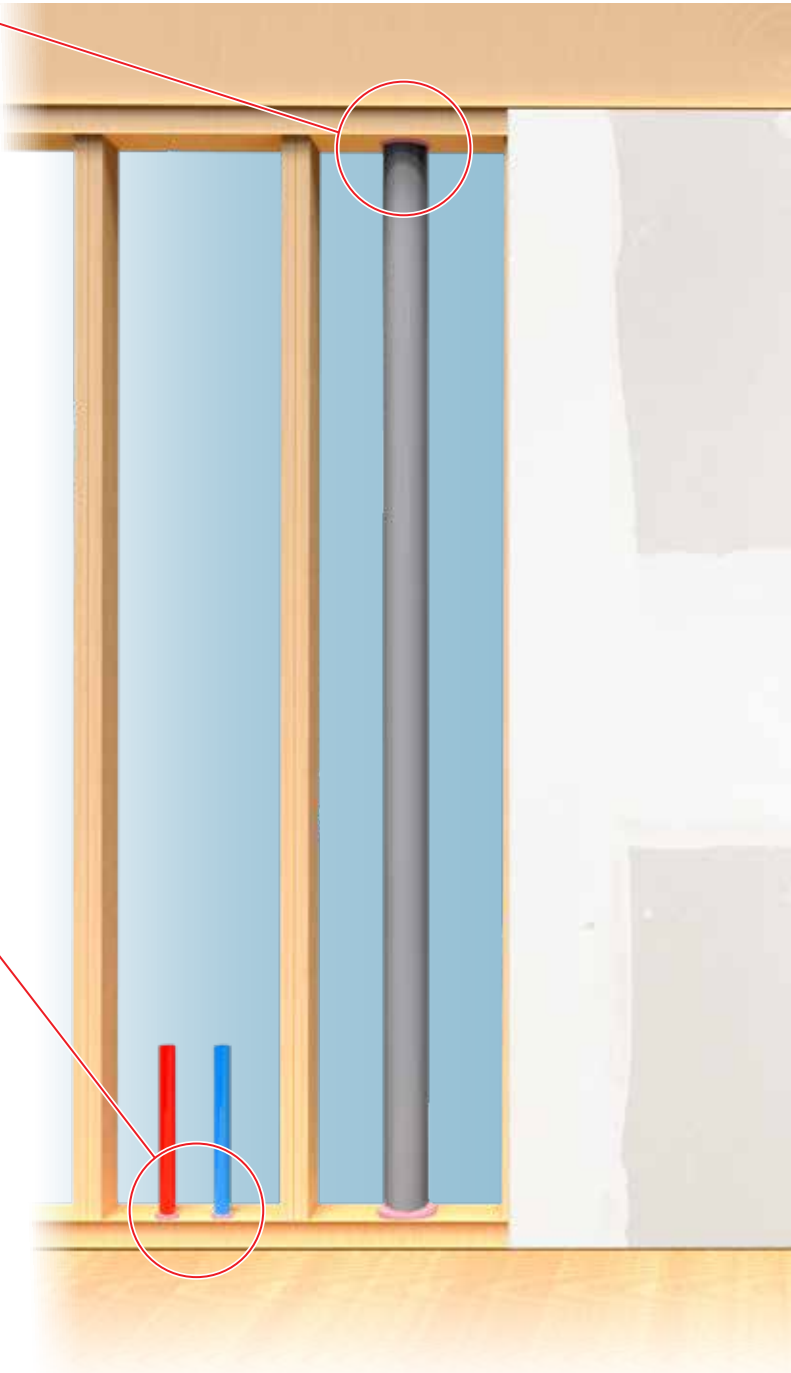

ordering information

SpecSeal® Range-Taking Firestop Collars (RTC)

ORDERING INFORMATION					
Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.	Weight (Each)
RTC350	730573038352	Adjustable factory collar for 3" (89 mm) & 4" (114 mm) pipe and associated couplings	1	6	0.80 lbs (0.36 kg)

SpecSeal® Series LCC Firestop Collars

ORDERING INFORMATION					
Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.	Weight (Each)
LCC150	730573039014	Firestop Collar for 1.5" (38 mm) Trade Size Plastic Pipe	1	6	0.22 lbs (0.10 kg)
LCC200	730573039021	Firestop Collar for 2.0" (51 mm) Trade Size Plastic Pipe	1	6	0.24 lbs (0.11 kg)
LCC300	730573039038	Firestop Collar for 3.0" (76 mm) Trade Size Plastic Pipe	1	6	0.46 lbs (0.21 kg)
LCC400	730573071083	Firestop Collar for 4.0" (102 mm) Trade Size Plastic Pipe	1	6	0.75 lbs (0.34 kg)

SpecSeal® EP Powershield™ Electrical Box Insert

ORDERING INFORMATION					
Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.	Weight (Each)
EP44	730573025000	3.75" x 3.75" x 1/8" (95 mm x 95 mm x 3 mm)	1	20	0.09 lbs (0.04 kg)
EP44-Bulk	730573025017	3.75" x 3.75" x 1/8" (95 mm x 95 mm x 3 mm) Bulk	N/A	600	0.09 lbs (0.04 kg)
EP45	730573025055	4.5" x 4.5" x 1/8" (114 mm x 114 mm x 3 mm)	1	20	0.13 lbs (0.06 kg)
EP45-Bulk	730573025062	4.5" x 4.5" x 1/8" (114 mm x 114 mm x 3 mm) Bulk	N/A	450	0.13 lbs (0.06 kg)
EP55	730573025550	4.75" x 4.75" x 1/8" (121 mm x 121 mm x 3 mm)	N/A	250	(0.15 lbs (0.07 kg)

SpecSeal® Series SSP Putty & Putty Pads

ORDERING INFORMATION					
Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.	Weight (Each)
SSP100	730573021057	36 in3 (0.6 liter) bar	1	6	2.22 lbs (1.01 kg)
SSP28	730573021019	24 in3 (0.4 liter) bar	1	1	1.42 lbs (0.64 kg)
SSP4S	73057302200	7.25" x 7.25" x 3/16" (184 x 184 x 4.8 mm) pad	1	20	0.64 lbs (0.29 kg)
SSP9S	730573081457	9.00" x 9.00" x 3/16" (229 x 229 x 4.8 mm) pad	1	20	0.85 lbs (0.39 kg)

WF300 Intumescent Firestop Caulk

ORDERING INFORMATION					
Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.	Weight (Each)
WF310	730573097106	10.1 Oz. Tube - 18.2 cu. in. (300 ml)	1	12	0.95 lbs (0.43 kg)
WF329	73057309729	29 Oz. Tube - 52 cu.in. (858 ml) (minimum quantities required)	1	N/A	2.73 lbs (1.23 kg)
WF320	730573097205	20 Oz. Sausage - 36 cu. in. (592 ml)	1	12	1.70 lbs (0.77 kg)
WF305	730573071083	5 Gallon Pail - 1,155 cu. in. (19.0 liters)	1	N/A	54.30 lbs (24.63 kg)

SmokeBlock® Caulk

ORDERING INFORMATION					
Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.	Weight (Each)
SB100	730573011607	10.1 Oz. Tube - 18.2 cu. in. (300 ml)	1	12 Tubes	1.21 lbs (0.59 kg)

SmokeBlock® Fireblocking Foam

ORDERING INFORMATION					
Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.	Weight (Each)
SB200	73057301161	12 Oz. Can - 22 cu. in. (355 ml)	1	12	1.07 lbs (0.49 kg)

