



SpeedFlex® Joint Profile
(Part Number: SFJP80)

1

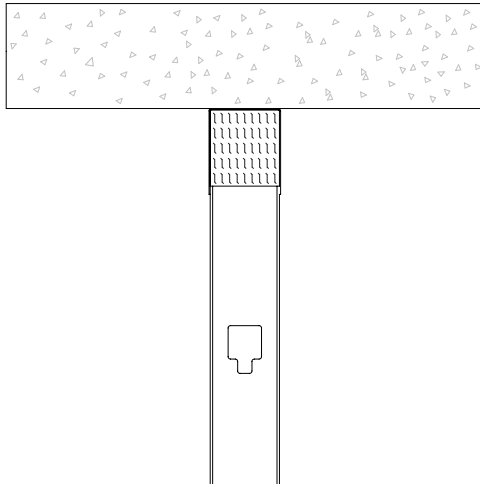

Mineral wool block compressed into ceiling runner and secured in place using cup head weld pins. See UL System for more detail


2

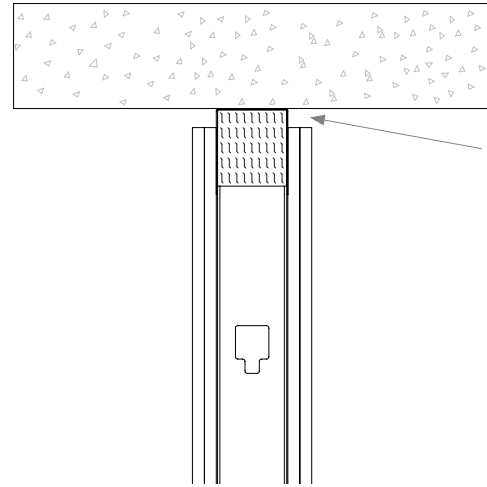


Max 1-3/4"
(44.5 mm)

Max 1-3/4" (44.5 mm) wide joint between gypsum layer(s) and bottom surface of floor/deck.

3

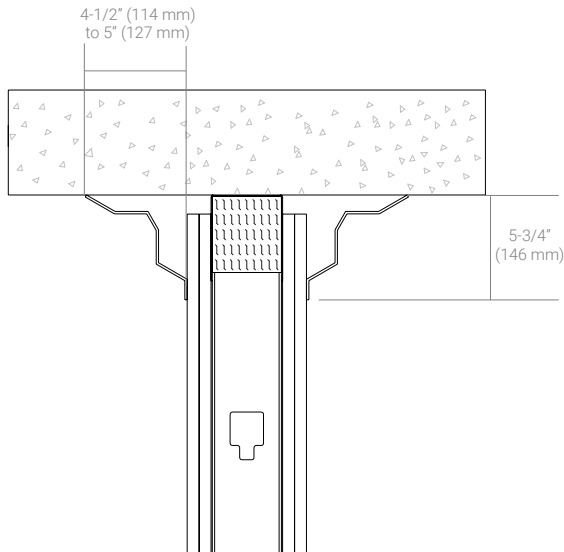

Place SFJP80 profile over joint on both sides of wall. Leg of Joint profile offset nom. 5-3/4" (146mm) from underside of floor/deck. Opposing leg offset from face of steel ceiling runner 4-1/2" (114mm) for 1Hr and 5" (127mm) for 2 Hr configurations. See UL System for more detail.

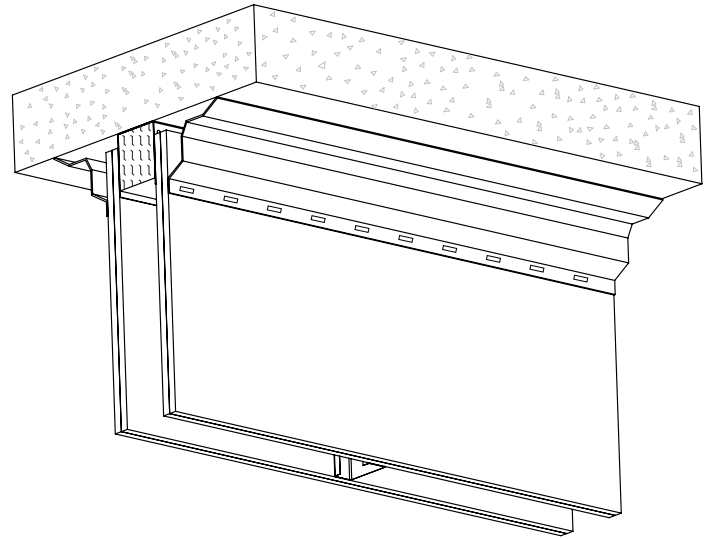

Profile fastened to wall surface using nom. 1/2" (13mm) steel staples spaced nom. 8" (203mm) OC. See UL System for more detail.

Note: For more information on firestop installation, refer to ASTM E3157.

