


PRODUCT BULLETIN

StoTique®

Product Number: 80203

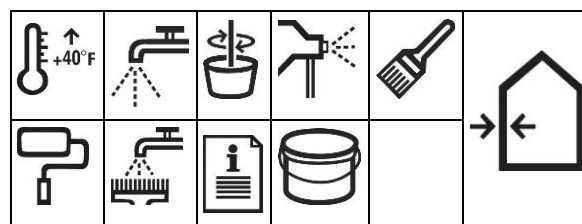

PRODUCT DESCRIPTION

StoTique is an exterior and interior coating that achieves an “antique” mottled effect or other custom decorative effects. Use it over existing EIFS, stucco, previously painted wall surfaces, or any Sto textured or smooth finish coating.

FEATURES	BENEFITS
Acrylic Based	Excellent adhesion; weather-resistant, promotes color stability
Alkali resistance	Resists peeling, blistering, and discoloration
Vapor Permeable	Allows substrate to breathe naturally; resists blisters caused by trapped vapor
Sto HP Colorant System	Enhanced UV resistance; wide range of colors
Cleans up with Water	Tools can be reused; no hazardous solvents needed; environmentally friendly
Low VOC	Safe for workers and the environment

COVERAGE (per pail)

800 -1000 ft² (74 – 93m²) per 1 gallon pail
 4000 – 5000 ft² (372 - 465²) per 5 gallon pail

Coverage will vary depending on substrate condition and texture, application technique, waste factor, final film thickness, and other variables that may exist.

Packaging: 1gallon pail (3.8L)
 5 gallon pail (19L)

Color: 800 Standard Colors or Custom Color Match

Sheen:

Shelf Life: 18 months, if properly stored and sealed.

Storage: Store in a dry area, between 50°F (10°C) and 85°F (29°C). Protect from direct sunlight, extreme heat [90°F (32°C)] and freezing.

SURFACE PREPARATION

All surfaces must be structurally sound, clean, dry, and free of frost and surface contamination such as dust, dirt, salts, grease, oils, efflorescence, mold, algae, mildew, or any other condition that may affect adhesion. Use appropriate repair methods for the substrate to repair pitting, spalls, cracks, peeling, blistering, delamination, weak surface conditions such as laitance, water damage, or other defects that may exist. If pressure washing, follow necessary safety precautions and adjust pressure to avoid damage to the underlying substrate. For mold, algae, and mildew removal, treat surfaces with a commercial mildew removal and/or wash product, carefully following manufacturer's application and safety directions for use and handling, including any special requirements when used in preparation for application of paints or coatings.

MIXING

Use product immediately to avoid settling or skinning.

1GP: Add 4 pounds of clean potable water to the pail. This should leave about 1.25 inches of headspace in the pail. Mix the sealed pail of product with the water added. Shake the pail for approximately 1 minute by hand. Foaming will occur which will leave a little less than an inch of headspace in the pail. This will give you the required mix ratio of 1 part to 1.3 parts of water (by volume).

5 GP: Add clean potable water to the pail to fill approximately half the pail. Then mix with a clean rust-free paddle and drill. Add more water up to the second rib from the top of the pail.

Frequent agitation is required throughout application to ensure color consistency.

IMPORTANT: ADD WATER JUST PRIOR TO APPLICATION TO PREVENT SETTLING. ONCE WATER IS ADDED THE PRODUCT SHOULD BE APPLIED THE SAME DAY.

LIMITED WARRANTY

This product is subject to a written limited warranty which can be obtained free of charge from Sto Corp.

PRODUCT BULLETIN

StoTique®

Product Number: 80203

APPLICATION

Vertical Wall Surfaces

Apply only to sound and clean, dry, properly prepared, frost-free surfaces. Do not apply over damp surfaces or during rain, hail, or snow events or if rain, hail, or snow is imminent. Apply only to sound and clean, dry, properly prepared frost-free surfaces. Do not apply over damp surfaces or during rain, hail, or snow events, or if rain, hail, or snow is imminent.

Apply with a roller, brush, sponge, Hudson-type sprayer, airless spray equipment, and/or any combination of these tools depending on the desired end appearance.

Once material is applied it may be dabbed with a sponge or rag to create a custom look. It is best to apply StoTique in two light coats. Avoid running, brush or roller marks. If the occur correct immediately while material is still wet to achieve the desired effect.

IMPORTANT:

StoTique should be darker than the finish surface that it goes over for best results.

Prepare a job site mock-up of the final coating assembly to verify aesthetics and adhesion to properly prepared surface.

Final appearance is highly dependent on application technique and desired effect. Proceed only when satisfied with final color/effect on the basis of approved mock-ups.

Apply in two uniform coats by brush, roller or with proper spray equipment to prepared/primed substrate at 6-8 WFT to achieve 2.8-3.8 DFT per coat. Apply coating in a continuous application, always working from a wet edge or architectural break to eliminate cold joints. Back roll open texture surfaces such as concrete masonry. Allow sufficient time for drying between coats.

Curing/Drying

Product dries within 24 hours under normal drying conditions [70°F (21°C), 50% RH]. Drying time varies with temperature/humidity and surface conditions. Protect installed product from rain, freezing, and continuous high humidity until completely dry.

Clean Up

Clean tools and equipment with water immediately after use. Dried material can only be removed mechanically.

Maintenance

Repair cracks or other damage to façade and recoat at intervals as needed to maintain fresh appearance. Repair balconies, scuppers, flashing and similar water shedding elements that lack drip edges or

that fail to shed water from the façade surface. Prevent or repair leaks from roofs, parapets, windows, sealants, or other components of construction, and prevent accumulation of water inside the wall assembly during and after construction. Water accumulation behind the coating can cause damage to the coating and/or underlying construction.

LIMITATIONS

- Apply when ambient and surface temperatures are 40°F (4°C) and rising, and below 100°F (38°C).
- Do not apply if the surface temperature is less than 5°F (2.8°C) above the ambient dew point temperature.
- Do not use below grade or in areas subjected to hydrostatic pressure, water immersion, ponding, or puddling.
- Dark colored coatings are not recommended for use over Exterior Insulation and Finish Systems (EIFS). Select finish colors with a lightness value of 20 or greater when used as part of an EIF System.
- Do not overcoat with solvent-based materials.
- Efflorescence of Portland cement-based substrates such as concrete, stucco, and concrete masonry sometimes causes staining or discoloration on the surface of applied coatings. Efflorescence is neither caused nor prevented by the Sto coating.
- Not to be used directly on wood or metal surfaces

HEALTH & SAFETY

WARNING: Causes eye and skin irritation.

Precautionary Statement: Wash hands thoroughly after handling. Wear protective gloves/protective clothing/eye protection/face protection.

FIRST AID MEASURES: Eye Contact: Immediately flush eyes with plenty of water for at least 15 to 20 minutes. Ensure adequate flushing of the eyes by separating the eyelids with fingers. Get immediate medical attention.

Skin Contact: Immediately wash skin with plenty of soap and water for 15 to 20 minutes, while removing contaminated clothing and shoes. Get medical attention if irritation develops or persists.

Inhalation: If inhaled, remove to fresh air. If not breathing, give artificial respiration or give oxygen by trained personnel. Seek immediate medical attention. Ingestion: If swallowed, do NOT induce vomiting. Call a physician or poison control center immediately. Never give anything by mouth to an unconscious person. Store locked up.

Spills: Collect with suitable absorbent material such as cotton rags.

Disposal: Dispose of in accordance with local, state or federal regulations.

Warning: KEEP CONTAINER CLOSED WHEN NOT IN USE. KEEP OUT OF THE REACH OF CHILDREN. NOT FOR INTERNAL CONSUMPTION. FOR INDUSTRIAL USE ONLY. Consult the Safety Data Sheet (SDS) on www.stocorp.com for further health and safety information.

PRODUCT BULLETIN

StoTique®

Product Number: 80203

TECHNICAL DATA

REPORT	TEST METHOD	TEST CRITERIA	TEST RESULT*
VOC (g/L)			This product complies with US EPA (40 CFR 59) and South Coast AQMD (Rule 1113) VOC emission standards for architectural coatings. VOC less than 50 g/L.

Sto Corp.

3800 Camp Creek Parkway
 Building 1400, Suite 120
 Atlanta, GA 30331
 Tel: 404-346-3666
 Toll Free: 1-800-221-2397
 Fax: 404 346-3119
www.stocorp.com

Revision Number: A8.1
 Date: 3/2023

ATTENTION

This product is intended for use by qualified professional contractors, not consumers, as a component of a larger construction assembly as specified by a qualified design professional, general contractor or builder. It should be installed in accordance with those specifications and Sto's instructions. Sto Corp. disclaims all, and assumes no, liability for on-site inspections, for its products applied improperly, or by unqualified persons or entities, or as part of an improperly designed or constructed building, for the nonperformance of adjacent building components or assemblies, or for other construction activities beyond Sto's control. Improper use of this product or use as part of an improperly designed or constructed larger assembly or building may result in serious damage to this product, and to the structure of the building or its components. **STO CORP. DISCLAIMS ALL WARRANTIES EXPRESSED OR IMPLIED EXCEPT FOR EXPLICIT LIMITED WRITTEN WARRANTIES ISSUED TO AND ACCEPTED BY BUILDING OWNERS IN ACCORDANCE WITH STO'S WARRANTY PROGRAMS WHICH ARE SUBJECT TO CHANGE FROM TIME TO TIME.** For the fullest, most current information on proper application, clean-up, mixing and other specifications and warranties, cautions and disclaimers, please refer to the Sto Corp. website, www.stocorp.com