

TWP-LV1 ADHESIVE PRIMER LOW VOC PRIMER



TAMKO® TWP-LV1 Adhesive Primer is a solvent-based low VOC product for use in regions with VOC restrictions. Designed for Balcony/Breezeway, Below-Grade, Fenestration and Thru-Wall applications, this high-quality rubberized adhesive primer can be used on multiple surfaces to create a powerful bond to waterproofing membranes.

TWP-LV1 ADHESIVE PRIMER

LOW VOC PRIMER

TAMKO® TWP-LV1 Adhesive Primer is ideal for exterior projects with little ventilation to help maintain air quality and reduce emissions.

DESCRIPTION

TAMKO® TWP-LV1 Adhesive Primer is used to prepare surfaces receiving waterproofing membranes to promote a strong bond.

- VOC less than 250 grams/liter
- Features a red tint to more easily ensure complete coverage
- Applied with a long nap roller or brush for a quick and smooth application
- Available in 5-gallon pails to get optimal coverage out of a single pail
- 5-year Limited Warranty and Arbitration Agreement

USES

To promote a powerful bond to asphalt, metal surfaces, OSB, plywood, DensGlass®, concrete, masonry block, or exterior gypsum sheathing. Used for horizontal and vertical applications. Ideal for positive-slope waterproofing for foundations and in-between slab applications.

TAMKO® WATERPROOFING PRODUCTS

TWP-LV1 Adhesive Primer is designed for use with TAMKO® Balcony/Breezeway, Below-Grade, Fenestration and Thru-Wall products including:

- TAMKO® TW Thru-Wall Flashing Membrane
- TAMKO® TW-60 Self-Adhering Sheet Waterproofing Membrane
- TAMKO® TW-105 Flashing
- TAMKO® TW-Drain 220 Prefabricated Drainage Composite
- TAMKO® TWM-1 Mastic Sealant
- TAMKO® TW Flash-N-Wrap® 25 Reflective Sheet Membrane
- TAMKO® TW Flash-N-Wrap® 40 Reflective Sheet Membrane
- TAMKO® TW Moisture Wrap


To learn more about our complete line of waterproofing products, visit tamkowaterproofing.com.

PRODUCT DATA†

Pail size	5 gallons	
Coverage per gallon	250 sq. ft. minimum	300 sq. ft. maximum
Dry time	Allow to cure until the surface is tacky but will not transfer when touched	

† Do not thin with organic solvents. Must not be used on or come into contact with EPS/XPS or ICF surfaces.

WATERPROOFING PRODUCTS BEGIN TO AGE AS SOON AS THEY ARE EXPOSED TO NATURE. BUILDINGS EXPERIENCE AGING FACTORS DIFFERENTLY, SO IT IS DIFFICULT TO PREDICT HOW LONG WATERPROOFING PRODUCTS WILL LAST. THAT'S WHY TAMKO PROVIDES A LIMITED WARRANTY FOR MANY PRODUCTS, THAT INCLUDES A BINDING ARBITRATION CLAUSE AND OTHER TERMS AND CONDITIONS WHICH ARE INCORPORATED HEREIN BY REFERENCE. YOU MAY OBTAIN A COPY OF THE LIMITED WARRANTY AT TAMKO.COM OR BY CALLING 1-800-641-4691.

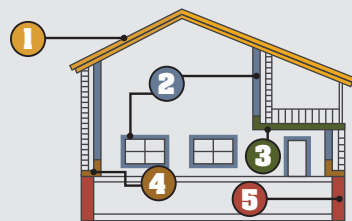

1 Specialty Underlayment

2 Window, Door & Cavity

3 Balcony/Breezeway

4 Thru-Wall

5 Below-Grade



1-800-641-4691
tamkowaterproofing.com

©2018 TAMKO Building Products, Inc.

TAMKO and the TAMKO logo are registered trademarks of TAMKO Building Products, Inc. DensGlass is a registered trademark of Georgia-Pacific Gypsum LLC.

7872 0918

41000990