



**TAMKO**  
BUILDING PRODUCTS

**STANDOUT VENTILATION PERFORMANCE.**  
**BLEND-IN BEAUTY.**



**TAMKO® VENTILATION PRODUCTS**





## Clean Sightlines. Great Circulation.

TAMKO® offers several affordable and easy-to-install products that help promote roof ventilation. Unlike other ventilation options, TAMKO products accent the ridge and eliminate unsightly vent caps to enhance visual curb appeal.

## The Importance of Proper Ventilation

Underventilated attic space can lead to higher utility bills and the accelerated aging of shingles. That's why proper roof ventilation is critical. A combination of continuous eaves and ridge vents provides uniform natural draft ventilation from the bottom to the top of the attic space.

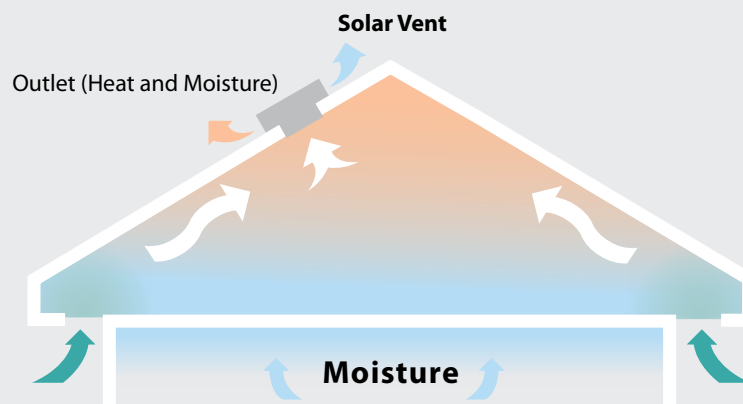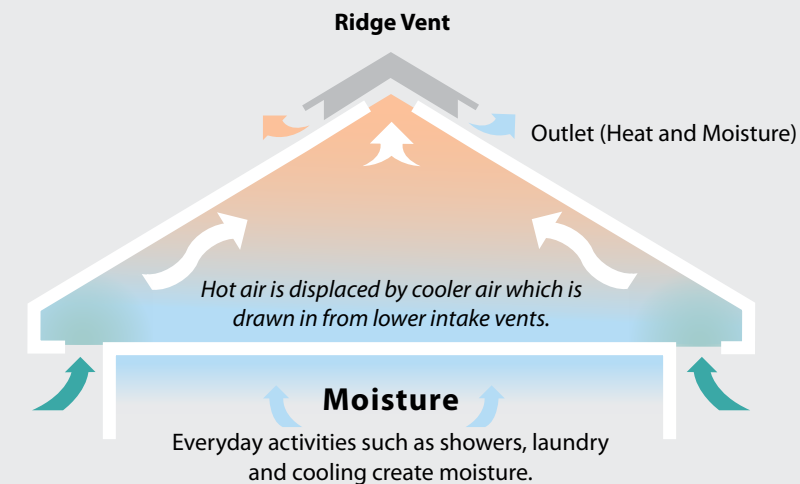



# Solar Attic Vent

## Solar-powered Ventilation System


- 20-watt solar panel ventilates up to 1,600 sq. ft.†††
- Operates from dawn to dusk without having to prop up the panel toward the sun.
- High-performance housing molded with UV-stabilized ABS color-dyed plastic; unit is made with tough tempered glass.
- Housing may be painted to match roof color.
- Heavy-duty motor operates with whisper-quiet sound.
- 1/8" heavy-gauge stainless steel screen provides protection from insects and animals without impeding airflow.

- 12"-diameter one-piece aluminum 5-blade fan operates quietly.
- Optional cold-weather thermostat automatically disengages the fan when temperature falls below 50°F.
- 6-year Limited Warranty\* on parts and a 2-year Limited Warranty\* on the motor.

\*To obtain a copy of TAMKO's Limited Warranty, visit us online at [tamko.com](http://tamko.com) or call us at 1-800-641-4691.

††† 1,600 sq. ft. based on 3/12 roof slope with open attic space. For larger areas, multiple ventilators will be necessary. The number of ventilators required will vary depending on roof slope, attic configuration and sq. ft. of open air inlets. For the ventilation requirements of your building, please contact an architect or building professional.


**Surface Mount** This standard option features a low-profile ventilator in a square design that integrates well with your shingles and the shape of your roof. Available in Black, Brown and Weathered Wood.




**Curb Mount** This option is identical to the Surface Mount option but with an added lip for flat, tiled or unusually steep roof installations. A fabricated curb box frame made from treated 2x4s is required to create a solid platform and better manage runoff. Available in Black and Brown.



**Remote Mount** This two-piece system enables the ventilator to be installed independently of the solar panel for less visibility and/or more convenient access. Available in Black and Brown.



**Gable Mount** If roof mounting is not possible or desirable, this unit provides the perfect alternative with a remote-mounted flat solar panel positioned to best capture solar energy. Available in Black.



Solar Attic Vent, surface mount, Black



Solar Attic Vent, curb mount, Brown

## CoolRidge® Sectional Ridge Vent with External Baffles

- Injection-molded polypropylene in 4-foot sections—both impact and UV resistant.
- Integrated end plugs every 12" help reduce scrap.
- Comes with up to a 40-year Limited Warranty\*.
- Internal supports in nail line area provide compression resistance for nailing.
- Embossed nail line and ½" nail zone area with clear space underneath help facilitate proper nailing.
- Exterior baffles and internal "sinewave"-shaped baffles help prevent rain, snow and insect infiltration.
- Male/female connection between pieces helps protect seams from leaks.
- Drain holes every 4" in exterior baffle to help prevent water buildup.

| PRODUCT DATA**                |  |
|-------------------------------|--|
| Width                         | 14 <sup>3</sup> / <sub>4</sub> " (0.375 meter)     |
| Length                        | 48" (1.22 meters)                                  |
| Thickness                     | 1 <sup>3</sup> / <sub>16</sub> " (2.1 centimeters) |
| Weight                        | 22 lb. per carton (9.98 kg)                        |
| Color                         | Black  |
| 10 pieces per carton =        | 40' per carton                                     |
| 12 cartons per skid =         | 480' per skid                                      |
| Net free area per linear foot | 18 square inches<br>(116.1 square centimeters)     |


## Xtractor Vent® XLP Turbo Nail Gun-Able Continuous Ridge Vent with External Baffles

- Rolled ridge vent for faster, more flexible installation.
- Comes with up to a 40-year Limited Warranty\*.
- Internal supports in nail line area provide compression resistance for nailing.
- Nail gun-able installation with embossed nail line and ½" nail zone area with clear space underneath help facilitate proper nailing (1<sup>3</sup>/<sub>4</sub>" coil nails included).
- Exterior baffles and internal "sinewave"-shaped baffles help keep rain and snow out.
- Male/female connection between pieces helps protect seams from leaks.
- Vent holes are only 1/8" wide to help prevent insect infiltration.
- Drain holes every ½" in exterior baffle to help prevent water buildup.
- Must be used with an equal or greater amount of soffit ventilation.
- Minimum 3/12" roof pitch (up to 16/12").
- Use with standard 12" (0.3 meter) wide cap shingles.

| PRODUCT DATA**                |   |
|-------------------------------|---|
| Width                         | 14" (0.36 meter)                                  |
| Length                        | 25' roll (7.62 meters)                            |
| Thickness                     | 5/8" (1.59 centimeters)                           |
| Weight                        | 175 lb. per carton (7.94 kg)                      |
| Color                         | Black   |
| 1 roll per carton =           | 25' per carton                                    |
| 18 cartons per skid =         | 450' per skid                                     |
| Net free area per linear foot | 12.75 square inches<br>(82.26 square centimeters) |



CoolRidge®\*\*\*

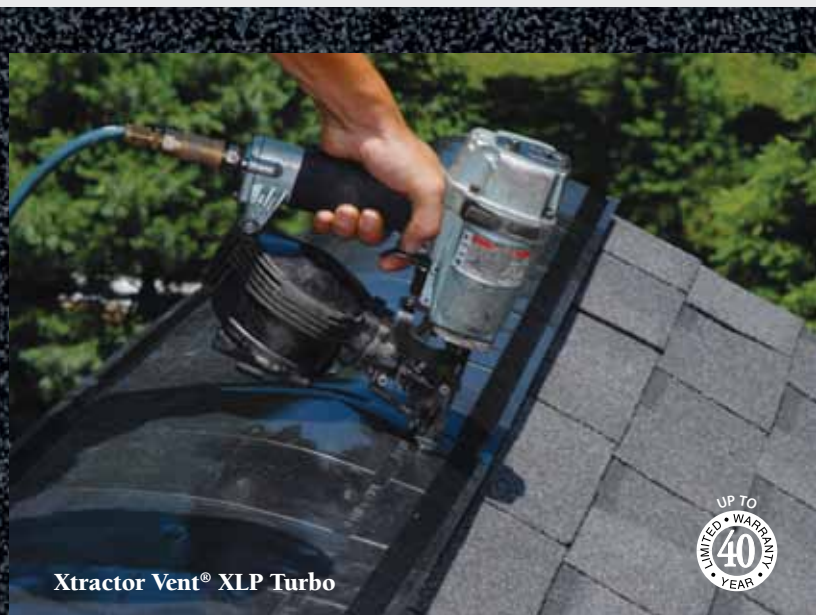

Xtractor Vent® XLP Turbo



## Roll Vent® Continuous Ridge Vent

- See-through hinge for easier centering over the ridge.
- Innovative design provides effective shingle-over ventilation. Nylon 6 plus carbon black for UV resistance with nonwoven nylon-polyester weather barrier.
- Virtually invisible to enhance curb appeal.
- Comes with up to a 50-year Limited Warranty\*.
- 2½" nails and nail line provided for ease of installation.
- Lightweight, easy-to-cut material eases installation and helps reduce labor costs.
- Compression-resistant design creates a stiffer nailing area and smooth finish.
- Requires no special tools, baffles, metal connectors, end caps or special filters, simplifying the installation process.
- Breathable weather barrier to help prevent rain, snow and insect infiltration.
- Meets or exceeds the following code: ICC-ES ESR 1059.

| PRODUCT DATA**                |   |                                 |
|-------------------------------|---|---------------------------------|
| Width                         | 10½" (0.267 meter)                          | 10½" (0.267 meter)              |
| Length                        | 20' (6.1 meters)                            | 50' (15.24 meters)              |
| Thickness                     | 1⅜" (2.38 centimeters)                      |                                 |
| Weight                        | 4.0 lb. (1.8 kg)                            | 10.9 lb. (5 kg)                 |
| 10½" x 20'                    | 5 rolls per bag =<br>8 bags per skid =      | 100' per bag<br>800' per skid   |
| 10½" x 50'                    | 2 rolls per bag =<br>12 bags per skid =     | 100' per bag<br>1,200' per skid |
| Net free area per linear foot | 18 square inches (116.1 square centimeters) |                                 |

## Rapid Ridge® Nail Gun-Able Continuous Ridge Vent

- Installs easily with pneumatic roofing nail gun.
- See-through hinge for easier centering over the ridge.
- Virtually invisible to enhance curb appeal.
- Comes with up to a 50-year Limited Warranty\*.
- Innovative design provides effective shingle-over ventilation. Nylon 6 plus carbon black for UV resistance with nonwoven nylon-polyester weather barrier.
- Lightweight, easy-to-cut material eases installation and helps reduce labor costs.
- Compression-resistant design creates a stiffer nailing area and smooth finish.
- 1¾" collated nails and nail line provided for ease of installation.
- Requires no baffles, metal connectors, end caps or special filters, simplifying the installation process.
- Unique geotextile design helps prevent snow, rain and insect infiltration.
- Meets or exceeds the following code: ICC-ES ESR 1059.

| PRODUCT DATA**                |   |                                 |
|-------------------------------|---|---------------------------------|
| Width                         | 10½" (0.267 meter)                            | 10½" (0.267 meter)              |
| Length                        | 20' (6.1 meters)                              | 50' (15.24 meters)              |
| Thickness                     | ⅝" (1.59 centimeters)                         |                                 |
| Weight                        | 3.6 lb. (1.6 kg)<br>(with collated nails)     | 10.9 lb. (5 kg)                 |
| 10½" x 20'                    | 5 rolls per bag =<br>8 bags per skid =        | 100' per bag<br>800' per skid   |
| 10½" x 50'                    | 2 rolls per bag =<br>12 bags per skid =       | 100' per bag<br>1,200' per skid |
| Net free area per linear foot | 12.5 square inches (80.64 square centimeters) |                                 |



Roll Vent®†



Rapid Ridge®††



## Complement the performance with TAMKO® underlayments

Applying a roof underlayment adds an extra layer of waterproofing protection before the application of shingles. In addition to the products listed below, TAMKO® offers a complete line of underlayments in a variety of sizes and weights. One is sure to be right for your project.



**TW Metal & Tile Underlayment** is well suited for application under roofs where prevention of water penetration is required. It meets ASTM D 1970 for nail sealability of self-adhered roofing underlayments and withstands high temperature conditions up to 250°F.



**Moisture Guard Plus®** provides an extra layer of waterproofing protection and features a skid resistant surface for improved traction and safer application. It meets ASTM D 1970 for nail sealability of self-adhered roofing underlayments.



## Building products for the professional

Since 1944, building professionals and homeowners have looked to TAMKO for quality products built to perform. Our residential line also includes MetalWorks® Steel Shingles, Heritage® Series Laminated Asphalt Shingles, 3-tab Asphalt Shingles, EverGrain® Composite Decking, Tam-Rail® Railing, waterproofing materials and asbestos-free cements and coatings. Each of these products delivers TAMKO quality, performance and durability.



P.O. Box 1404 Joplin, MO 64802-1404

1-800-641-4691

tamko.com

\* To obtain a copy of TAMKO's Limited Warranty, visit us online at tamko.com or call us at 1-800-641-4691.

\*\* All values stated as nominal.

\*\*\*U.S. Patent #6,277,024.

† U.S. Patents #5,960,595; #6,298,613; #6,981,916. Canadian Patent #2,300,803.

†† U.S. Patents #6,981,916; #6,298,613; #5,960,595. Canadian Patents #2,300,803; #4,942,699.

Information included in this brochure was current at the time of printing. To obtain a copy of the most current version of this brochure, visit us online at tamko.com or call us at 1-800-641-4691.

Note: TAMKO products must be applied in accordance with the directions listed in this brochure and on the product wrapper. If conditions require special fastening methods, obtain written recommendations from TAMKO.

TAMKO, CoolRidge, Moisture Guard Plus, EverGrain, MetalWorks, Heritage and Tam-Rail are registered trademarks of TAMKO Building Products, Inc. Roll Vent, Rapid Ridge and Xtractor Vent are trademarks of Benjamin Obdyke Incorporated.

©2012 TAMKO Building Products, Inc.



40000359