


PETROMAT MPG⁴

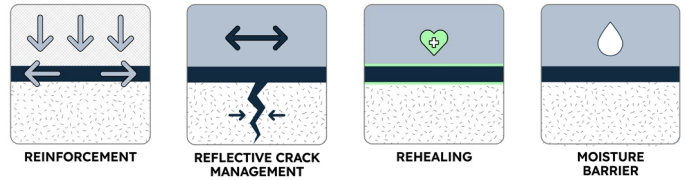

PETROMAT[®] MPG⁴ is a 100% polypropylene filament nonwoven fabric, reinforced by mechanically bonded multi-axial network of reinforcing glass filaments. PETROMAT MPG⁴ was especially developed for the rehabilitation of asphalt roads.

TenCate Geosynthetics Americas Laboratories are accredited by Geosynthetic Accreditation Institute – Laboratory Accreditation Program ([GAI-LAP](http://GAI-LAP.com)).

MECHANICAL PROPERTIES	TEST METHOD	UNIT	MINIMUM AVERAGE ROLL VALUE
Tensile Strength @ 0°	ASTM 6637 A modified	lbs/in (kN/m)	345 (60)
Tensile Strength @ 90°	ASTM 6637 A modified	lbs/in (kN/m)	345 (60)
Tensile Strength @ 45°	ASTM 6637 A modified	lbs/in (kN/m)	345 (60)
Tensile Strength @ -45°	ASTM 6637 A modified	lbs/in (kN/m)	345 (60)
Tensile Elongation	ASTM 6637 A modified	%	<5

	TEST METHOD	UNIT	MINIMUM TEST VALUE	
Melting Point ¹	ASTM D276	F° (C°)	1472°	(800°)
Asphalt Retention	ASTM D6140	gal/yd ² (l/m ²)	0.17	(0.8)
Glass by Weight		%	85	

PHYSICAL PROPERTIES	TEST METHOD	UNIT	TYPICAL VALUE
Mass/Unit Area	ASTM D5261	oz/yd ² (g/m ²)	16.6 (563)

		ROLL SIZE	
Roll Dimensions (width x length)	ft (m)	10 x 150 (1.9 x 94.1)	12.5 x 150 (3.8 x 45.7)
Roll Area	yd ² (m ²)	167 (140)	208 (174)
Estimated Roll Weight	lbs (kg)	228 (103)	269 (122)

¹Melting point for Fiberglass. Glass Filaments are incombustible