


**(RC) Resilient Furring Channel**

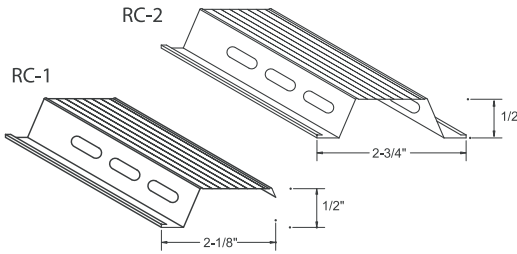

**Product Data:**


- RC-1: Single Leg • RC-2: Double Leg
- Gauge: Standard 25 gage conforming to ASTM A-653 and C-645.
- Lengths: 12' 0" stock length
- RC-1: Screw attachment, one side only.
- RC-2: Screw attachment, both sides.

**Uses:**

- Used as cross furring members for resilient attachment of gypsum wallboard or lath on ceilings and partitions.
- Decreases sound transmission through wall partitions and ceilings.

Product	Length	Wt./Ft.	Pcs./Ctn.	Ft./Ctn.
RC-1	12'	0.20	40	480
RC-2	12'	0.24	40	480

**(ZFC) Z-Furring Channel**



**Product Data:**


- Available in hot-dipped galvanized steel conforming to ASTM A-653 and C-645.
- Gauges: Standard 25 gauge, (available in 20, 18, and 16 gauge upon request).
- Lengths: Standard 10' 0" and 8' 6" lengths, (other lengths available upon request).

**Uses:**

- Designed to accommodate the installation of rigid insulation board while providing an attachment for drywall or other facing materials to the interior side of masonry or monolithic concrete walls.

Product	(A) in. Size	25 Ga. Wt./Ft.
Z-100	1.00	0.195
Z-150	1.50	0.225
Z-200	2.00	0.260

**(FS) Flat Strapping**

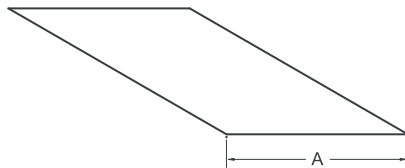

**Product Data:**


- Designation: FS width and gauge.
- Widths: 2, 4 and 6" (custom widths and coil available).

**Uses:**

- Provides tension force resistance in shear wall assemblies.
- Resists racking of prefabricated wall assemblies while handling, transporting, and erecting.

Product	Width (in.)	Gauges	Length
FS	2", 4", 6"	25, 22, 20, 18, 16	10'

**(DCB) Drywall Corner Bead**

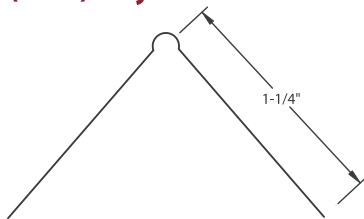


**Product Data:**

- Made of galvanized steel.
- Joint cement adheres easily to knurled flanges and keys into the perforations.
- Exposed nose provides a straight, clean corner definition and guards against damage through impact.

**Uses:**

- Provides durable protection for drywall external corners.
- Specify hot-dipped for moist or humid conditions.

**(RA) Rolled Angles**



**Product Data:**

- Available in most sizes, lengths, and gauges.

**Uses:**

- For 90 degree corner enclosures at lapped framing location; provides in-plane stability of framework.

(AxB) Product	Gauges	Length
7/8" x 1-3/8"	25, 22, 20, 18	10'
1-5/8" x 1-5/8"	25, 22, 20, 18, 16	10'
2" x 2"	25, 22, 20, 18, 16, 14	10'
3" x 3"	20, 18, 16, 14, 12	10'
2" x 4"	20, 18, 16, 14, 12	10'
3" x 6"	20, 18, 16, 14, 12	10'