


ACCESSORIES

(CLT) Custom Leg Track

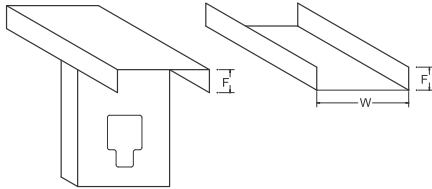


Product Data:

- Designation: CLT or VST Width x Gauge
- Widths: Multiple Sizes and Gauges available.
- Gauge: Multiple Sizes available.
- Lengths: Standard 10'

Uses:

- CLT used for standard stick built construction with channel or bracing attached within 2' of track member to each stud.
- For attachment at top of infill curtain wall systems to primary frame; allows for one half inch of live load deflection or settlement of the primary frame without transferring the load to the exterior wall while bracing the wall against lateral forces.
- Variable width and height for track-in-track applications such as panel construction

(FS) Flat Strapping

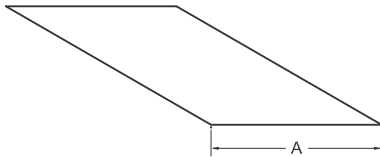


Product Data:

- Designation: Width-FS- Gauge.
 - o Ex 2" FS- 20Ga
- Stock widths: 2", 4", 6"
- Custom Widths are available in increments of even inches.
 - o Examples: 1.5, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47, 48"
- Length: 10' Standard (Alt. Lengths Available, ie. 8')
- Gauges:
 - o 33KSI: 25, 22, 20, 20S & 18 gauge.
 - o 50KSI: 20S, 22, 16, 14 & 12 gauge.
- Coating:
 - o Drywall: Standard G-40 Hot Dipped Galvanized. Also Available in G-60 and G-90.
 - o Structural: G-60 Hot Dipped Galvanized. Also Available in G-60 and G-90
- Meets applicable ASTM's for Structural and Drywall applications:
 - o ASTM- A1003, A-653, A924, C-645, C754, C955, C1007

Uses

- Provides tension force resistance in shear wall assemblies.
- Backing plates for fixtures, railings and where ever additional pullout strength is required.
 - Resists racking of prefabricated wall assemblies while handling, transporting, and erecting.

(WS) Web Stiffeners




Product Data:

- Designation: WS W x F x gauge.
- Length: 4, 6, 7-1/4, 8, 9-1/4, 10, 12 inch.
- Galvanized finish.
- For axial capacities contact Telling Industries Engineering

Uses:

- For web reinforcement of C shaped framing members
- Allow transfer of axial loads through joists at bearing conditions of platform frames.

(BC) Bridge Clip




Product Data:

- Designation: BC Length x Gauge
- Leg Dimensions: F-1-1/2", W-1-1/2"
- Standard Gauge: 16 ga. galvanized steel.
- Standard Length: L-2-1/2", 3-3/8" and 5-1/4"

Uses:

- For alternate screw attachment of CRC bridging to stud webs in place of direct weld.



Note: 4 Screws min.