

## ENVIRONMENTAL PRODUCT DECLARATION

# THERMAFIBER® MINERAL WOOL

AN OWENS CORNING COMPANY



*Owens Corning® Thermafiber® Mineral Wool Insulation enhances comfort, energy savings and sustainability in new and existing structures.*



Owens Corning, and its family of companies, is a leading global producer of residential and commercial building materials, glass fiber reinforcements, and engineered materials for composite systems. It uses a decision framework for managing the company as a sustainable enterprise. It is the foundation of the company's strategy of building market-leading businesses, global in scope – human in scale, and reflects the company's purpose: our people and products make the world a better place.

Owens Corning is committed to balancing economic growth with social progress and sustainable solutions to its building materials and composite customers around the world.

This Environmental Product Declaration is a component of our stated goal to provide life cycle information on all core products.

[sustainability.owenscorning.com](http://sustainability.owenscorning.com)



# ENVIRONMENTAL PRODUCT DECLARATION



Thermafiber® Mineral Wool

According to ISO 14025,  
EN 15804 and ISO 21930:2017

|                                                                                                                                                                   |                                                                                                                                                                                           |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EPD PROGRAM AND PROGRAM OPERATOR<br>NAME, ADDRESS, LOGO, AND WEBSITE                                                                                              | UL Environment<br>333 Pfingsten Road Northbrook, IL 60611                                                                                                                                 |
| GENERAL PROGRAM INSTRUCTIONS<br>AND VERSION NUMBER                                                                                                                | General Program Instructions v2.5 March 2020                                                                                                                                              |
| MANUFACTURER NAME AND ADDRESS                                                                                                                                     | Thermafiber, Inc., One Owens Corning Parkway, Toledo, OH, USA                                                                                                                             |
| DECLARATION NUMBER                                                                                                                                                | 4790011847.101.2 (updated 12/2024)                                                                                                                                                        |
| DECLARED PRODUCT &<br>FUNCTIONAL UNIT OR DECLARED UNIT                                                                                                            | 1 m <sup>2</sup> insulation at R <sub>SI</sub> =1                                                                                                                                         |
| REFERENCE PCR AND VERSION NUMBER                                                                                                                                  | Part B: Building Envelope Thermal Insulation EPD Requirements, UL 10010-1                                                                                                                 |
| DESCRIPTION OF PRODUCT APPLICATION/USE                                                                                                                            | Thermafiber® Mineral Wool is a type of slag wool insulation product used in a variety of building applications, both residential and commercial, requiring the use of thermal insulation. |
| PRODUCT RSL DESCRIPTION (IF APPL.)                                                                                                                                | 75 years                                                                                                                                                                                  |
| MARKETS OF APPLICABILITY                                                                                                                                          | Building Material                                                                                                                                                                         |
| DATE OF ISSUE                                                                                                                                                     | 10/1/2021                                                                                                                                                                                 |
| PERIOD OF VALIDITY                                                                                                                                                | 5 Years                                                                                                                                                                                   |
| EPD TYPE                                                                                                                                                          | Product-specific                                                                                                                                                                          |
| RANGE OF DATASET VARIABILITY                                                                                                                                      | NA                                                                                                                                                                                        |
| EPD SCOPE                                                                                                                                                         | Cradle to gate with options (A4, A5, C1-C4)                                                                                                                                               |
| YEAR(S) OF REPORTED PRIMARY DATA                                                                                                                                  | 2020                                                                                                                                                                                      |
| LCA SOFTWARE & VERSION NUMBER                                                                                                                                     | SimaPro 9.1                                                                                                                                                                               |
| LCI DATABASE(S) & VERSION NUMBER                                                                                                                                  | ecoinvent 3.6                                                                                                                                                                             |
| LCIA METHODOLOGY & VERSION NUMBER                                                                                                                                 | TRACI 2.1 v1.05                                                                                                                                                                           |
| The PCR review was conducted by:                                                                                                                                  | UL Environment                                                                                                                                                                            |
|                                                                                                                                                                   | PCR Review Panel                                                                                                                                                                          |
|                                                                                                                                                                   | epd@ulenvironment.com                                                                                                                                                                     |
| This declaration was independently verified in accordance with ISO 14025: 2006.<br><input type="checkbox"/> INTERNAL <input checked="" type="checkbox"/> EXTERNAL |                                                                                                       |
|                                                                                                                                                                   | Cooper McCollum, UL Environment                                                                                                                                                           |
| This life cycle assessment was conducted in accordance with ISO 14044 and the reference PCR by:                                                                   | Aspire Sustainability                                                                                                                                                                     |
|                                                                                                                                                                   |                                                                                                                                                                                           |
| This life cycle assessment was independently verified in accordance with ISO 14044 and the reference PCR by:                                                      |                                                                                                       |
|                                                                                                                                                                   | Thomas P. Gloria, Industrial Ecology Consultants                                                                                                                                          |

## LIMITATIONS

**Exclusions:** EPDs do not indicate that any environmental or social performance benchmarks are met, and there may be impacts that they do not encompass. LCAs do not typically address the site-specific environmental impacts of raw material extraction, nor are they meant to assess human health toxicity. EPDs can complement but cannot replace tools and certifications that are designed to address these impacts and/or set performance thresholds – e.g. Type 1 certifications, health assessments and declarations, environmental impact assessments, etc.

**Accuracy of Results:** EPDs regularly rely on estimations of impacts; the level of accuracy in estimation of effect differs for any particular product line and reported impact.

**Comparability:** EPDs from different programs may not be comparable. Full conformance with a PCR allows EPD comparability only when all stages of a life cycle have been considered. However, variations and deviations are possible. Example of variations: Different LCA software and background LCI datasets may lead to differences results for upstream or downstream of the life cycle stages declared.

# ENVIRONMENTAL PRODUCT DECLARATION



Thermafiber® Mineral Wool

According to ISO 14025,  
EN 15804 and ISO 21930:2017

## 1. Product Definition and Information

### 1.1. Description of Company/Organization

Founded in 1938, Owens Corning has been a leader in insulation, roofing and fiberglass composites. It has a global presence with 25,000 people in 31 countries. This Environmental Product Declaration is representative of product produced at the location listed below.

Joplin Plant  
Joplin, MO 64804

### 1.2. Product Description

#### Product Identification

Thermafiber® Mineral Wool Insulation products are comprised of semi-rigid and rigid boards and batts. Mineral wool resists mold, fungi, and is vermin proof due to its being an inorganic material. The R-value of Thermafiber® Mineral Wool Insulation ranges from 3.7 - 4.3 per inch (25.4 mm) of thickness. It is available in multiple thicknesses and densities, with various facings by product type. Reflected by its R-value, mineral wool's insulating performance is achieved by its densely packed fibers. Its high resistance to heat flow translates into year-round comfort and energy savings.



Thermafiber® products covered by this EPD include: Fire & Sound Guard® Plus, FireSpan® 40, 90 & 120, Safing (4 pcf | 64 kg/m³) & (6 pcf | 96 kg/m³), SAFB™ (2.5 pcf | 40 kg/m³) & (4 pcf | 64 kg/m³), RainBarrier®, RainBarrier® Dark, RainBarrier® ci High Compressive (80), RainBarrier® ci High Compressive Plus (110), RainBarrier® ci High Compressive Max (140), and VersaBoard® 35, 40, 60 & 80.



# ENVIRONMENTAL PRODUCT DECLARATION



Thermafiber® Mineral Wool

According to ISO 14025,  
EN 15804 and ISO 21930:2017

## Product Specification

Select product specifications are included below. For additional information and current specifications refer to the Product Data Sheet on owenscorning.com.

| Fire & Sound Guard® Plus                                                                                                             | FireSpan® 40, 90, & 120                                                     | Safing                                                                      | SAFB™          | RainBarrier® & RainBarrier® Dark®   | RainBarrier® ci High Compressive (80) | RainBarrier® ci High Compressive Plus (110) | RainBarrier® ci High Compressive Max (140) | VersaBoard® 35, 40, 60 & 80                                                 |
|--------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|-----------------------------------------------------------------------------|----------------|-------------------------------------|---------------------------------------|---------------------------------------------|--------------------------------------------|-----------------------------------------------------------------------------|
| <b>COMPLIANCE</b>                                                                                                                    |                                                                             |                                                                             |                |                                     |                                       |                                             |                                            |                                                                             |
| <b>CCMC Evaluation Listing No.</b>                                                                                                   |                                                                             |                                                                             |                |                                     |                                       |                                             |                                            |                                                                             |
| 14059-L                                                                                                                              | 14060-L                                                                     | 146060-L                                                                    | 14059-L        | 146060-L                            | 146060-L                              | 146060-L                                    | 146060-L                                   | 146060-L                                                                    |
| <b>Classification ASTM C612 (Type)</b>                                                                                               |                                                                             |                                                                             |                |                                     |                                       |                                             |                                            |                                                                             |
| ---                                                                                                                                  | IA, IB, II, III, IVA, IVB <sup>3</sup>                                      | IA, IB, II, III, IVA                                                        | ---            | IA, IB, II, III, IVA, IVB           | IA, IB, II, III, IVA, IVB             | IA, IB, II, III, IVA, IVB                   | IA, IB, II, III, IVA, IVB                  | IA, II, III, IVA                                                            |
| <b>NFPA 101 Class A-rated interior finish</b>                                                                                        |                                                                             |                                                                             |                |                                     |                                       |                                             |                                            |                                                                             |
| ✓                                                                                                                                    |                                                                             |                                                                             | ✓              |                                     |                                       |                                             |                                            |                                                                             |
| <b>CAN/ULC-S702 (Type)</b>                                                                                                           |                                                                             |                                                                             |                |                                     |                                       |                                             |                                            |                                                                             |
| I                                                                                                                                    | I <sup>1</sup> , III <sup>2</sup>                                           | I <sup>1</sup> , III <sup>2</sup>                                           |                | I                                   | I                                     | I                                           | I                                          | I <sup>1</sup> , III <sup>2</sup>                                           |
| <b>FIRE</b>                                                                                                                          |                                                                             |                                                                             |                |                                     |                                       |                                             |                                            |                                                                             |
| <b>Combustibility ASTM E136 (Rated Non-combustible per NFPA Standard 220)</b>                                                        |                                                                             |                                                                             |                |                                     |                                       |                                             |                                            |                                                                             |
| ✓                                                                                                                                    | ✓                                                                           | ✓                                                                           | ✓              | ✓                                   | ✓                                     | ✓                                           | ✓                                          | ✓                                                                           |
| <b>CAN/ULC S114 (non-combustible)</b>                                                                                                |                                                                             |                                                                             |                |                                     |                                       |                                             |                                            |                                                                             |
| ✓                                                                                                                                    | ✓                                                                           | ✓                                                                           | ✓              | ✓                                   | ✓                                     | ✓                                           | ✓                                          | ✓                                                                           |
| <b>Surface Burning Characteristics ASTM E84 (Flame Spread/Smoke Developed)</b>                                                       |                                                                             |                                                                             |                |                                     |                                       |                                             |                                            |                                                                             |
| 0/0 <sup>1</sup>                                                                                                                     | 0/0 <sup>1</sup><br>25/0 <sup>2</sup>                                       | 0/0 <sup>1</sup><br>25/0 <sup>2</sup>                                       | 0/0            | 0/0 <sup>1</sup>                    | 0/0 <sup>1</sup>                      | 0/0 <sup>1</sup>                            | 0/0 <sup>1</sup>                           | 0/0 <sup>1</sup>                                                            |
| <b>Surface Burning Characteristics CAN/ULC S102 (Flame Spread/Smoke Developed)</b>                                                   |                                                                             |                                                                             |                |                                     |                                       |                                             |                                            |                                                                             |
| 0/0 <sup>1</sup>                                                                                                                     | 0/0 <sup>1</sup><br>25/0 <sup>2</sup>                                       | 0/0 <sup>1</sup><br>25/0 <sup>2</sup>                                       | 0/0            | 0/5 <sup>1</sup>                    | 0/5 <sup>1</sup>                      | 0/5 <sup>1</sup>                            | 0/5 <sup>1</sup>                           | 0/5 <sup>1</sup>                                                            |
| <b>Smoulder Resistance CAN/ULC S129 (Mean Mass Loss)</b>                                                                             |                                                                             |                                                                             |                |                                     |                                       |                                             |                                            |                                                                             |
| ≤0.02%                                                                                                                               | ≤0.02%                                                                      | ≤0.02%                                                                      | ≤0.02%         | ≤0.02%                              | ≤0.02%                                | ≤0.02%                                      | ≤0.02%                                     | ≤0.02%                                                                      |
| <b>MOISTURE</b>                                                                                                                      |                                                                             |                                                                             |                |                                     |                                       |                                             |                                            |                                                                             |
| <b>Water Vapor Permeance ASTM E96 (Perms   ng/Pa.s.m<sup>2</sup>)</b>                                                                |                                                                             |                                                                             |                |                                     |                                       |                                             |                                            |                                                                             |
| 50 <sup>1</sup>   2850 <sup>1</sup> ;                                                                                                | 50 <sup>1</sup>   2850 <sup>1</sup> ;<br>0.02 <sup>2</sup>   1 <sup>2</sup> | 50 <sup>1</sup>   2850 <sup>1</sup> ;<br>0.02 <sup>2</sup>   1 <sup>2</sup> | ---            | 50 <sup>1</sup>   2850 <sup>1</sup> | 24   1,373                            | 46   2631                                   | 57   3261                                  | 50 <sup>1</sup>   2850 <sup>1</sup> ;<br>0.02 <sup>2</sup>   1 <sup>2</sup> |
| <b>Water Vapor Sorption ASTM C1104 (Absorption by volume)</b>                                                                        |                                                                             |                                                                             |                |                                     |                                       |                                             |                                            |                                                                             |
| <1%                                                                                                                                  | <1%                                                                         | <1%                                                                         | <1%            | 0.03%                               | <1%                                   | <0.5%                                       | <0.5%                                      | <1%                                                                         |
| <b>Fungi Resistance ASTM C1338 (complies/pass)</b>                                                                                   |                                                                             |                                                                             |                |                                     |                                       |                                             |                                            |                                                                             |
| ✓                                                                                                                                    | ✓                                                                           | ✓                                                                           | ✓              | ✓                                   | ✓                                     | ✓                                           | ✓                                          | ✓                                                                           |
| <b>Stability ASTM C356 (Linear shrinkage @1200°F   650°C)</b>                                                                        |                                                                             |                                                                             |                |                                     |                                       |                                             |                                            |                                                                             |
| ---                                                                                                                                  | <2%                                                                         | ---                                                                         | ---            | <2%                                 | <2%                                   | <2%                                         | <2%                                        | <2%                                                                         |
| <b>Corrosion of Steel, Aluminum, and Copper ASTM C665 (non-corrosive/pass)</b>                                                       |                                                                             |                                                                             |                |                                     |                                       |                                             |                                            |                                                                             |
| ✓                                                                                                                                    | ✓ <sup>4</sup>                                                              | ✓ <sup>4</sup>                                                              | ✓ <sup>5</sup> | ✓                                   | ✓                                     | ✓                                           | ✓                                          | ✓                                                                           |
| <sup>1</sup> Unfaced<br><sup>2</sup> Foil faced<br><sup>3</sup> FireSpan® 90 only<br><sup>4</sup> Type I, III<br><sup>5</sup> Type 1 |                                                                             |                                                                             |                |                                     |                                       |                                             |                                            |                                                                             |



ENVIRONMENTAL PRODUCT DECLARATION



Thermafiber® Mineral Wool

According to ISO 14025,  
EN 15804 and ISO 21930:2017

Flow Diagram

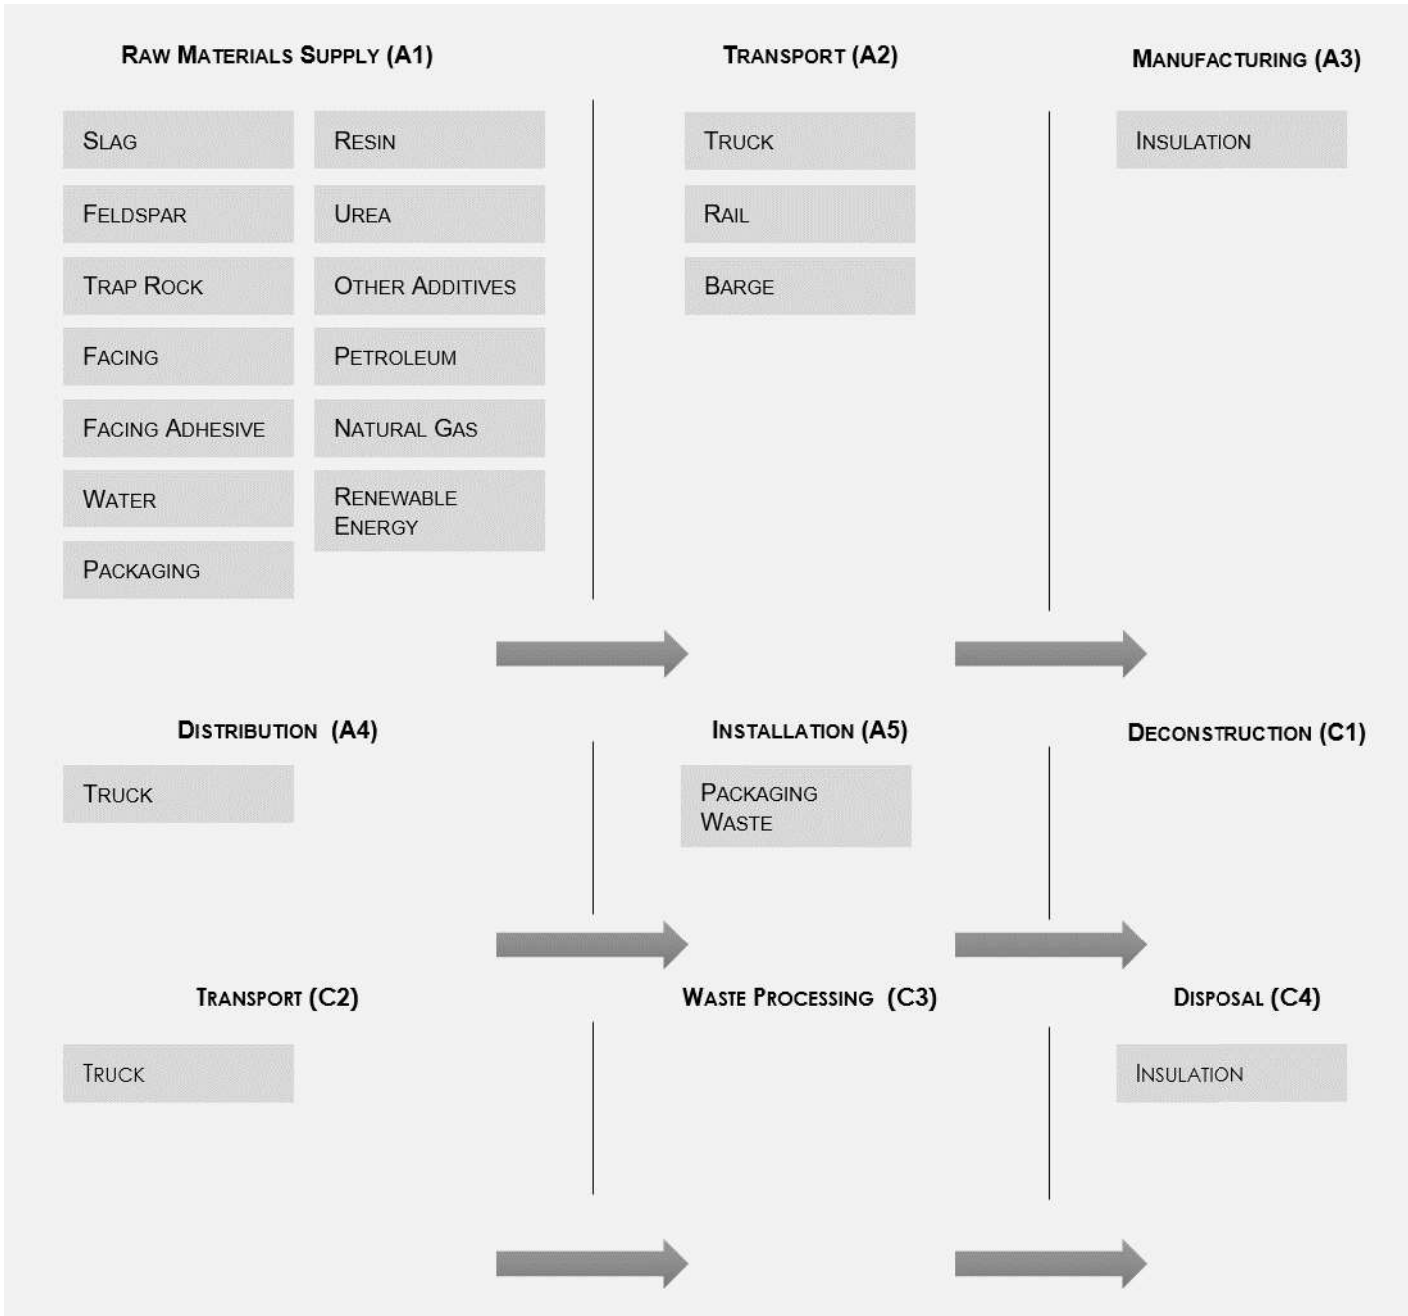


Figure 1. Flow Diagram of Thermafiber® Mineral Wool Insulation





# ENVIRONMENTAL PRODUCT DECLARATION



Thermafiber® Mineral Wool



According to ISO 14025,  
EN 15804 and ISO 21930:2017

## Product Average

The results of this declaration represent an average performance for SAFB™ (2.5 pounds per cubic foot | 40 kg/m<sup>3</sup> density version) reference product at the functional unit of 1 m<sup>2</sup> at R<sub>SI</sub> = 1 at the manufacturing location. These results were derived using reported densities, thermal conductivity, and facility-level production data of products covered by this EPD for the manufacturing location. Using scaling factors found in **Appendix A**, results can be converted to other products at the functional unit or the as supplied thickness and R-value.

## 1.3. Application

In residential and commercial construction, including multi-family construction, mineral wool insulation products are used as non-structural thermal-insulating materials in interior and exterior walls, floor-ceiling assemblies, attics and crawl spaces.

In commercial construction, mineral wool insulation can be used as continuous insulation in the building envelope, exterior wall cavity insulation, as acoustic insulation for partition interior walls, and a variety of other applications. Mineral wool is the only insulation approved for use in curtain wall perimeter fire containment applications because of its fire resistant properties.

## 1.4. Declaration of Methodological Framework

This declaration is a product-specific EPD and is cradle-to-installation with end-of-life. The underlying LCA upon which this EPD is based included the following life cycle modules: *Raw Material supply (A1); Inbound Transportation (A2); Manufacturing (A3); Distribution (A4); Installation (A5); End-of-life, Transport (C2) and End-of-life, Disposal (C4)*. No known flows have been deliberately excluded. The product is expected to perform as claimed for the 75-year reference service life if it remains clean and dry in its installed state.

## 1.5. Technical Requirements

At a minimum, Thermafiber® Mineral Wool Insulation unfaced products for commercial applications meet or exceed one of the following:

### ❖ Corrosion Resistance

- Type I, II or III when tested in accordance with ASTM C665, *Standard Specification for Mineral-Fiber Blanket Thermal Insulation for Light Frame Construction and Manufactured Housing*

### ❖ Classification

- Type IA, IB, II, III, IVA, or IVB when tested in accordance with ASTM C612, *Standard Specification for Mineral Fiber Block and Board Thermal Insulation*
- Industrial Blanket products meet Types I-VII when tested in accordance with ASTM C553, *Standard Specification for Mineral Fiber Blank Thermal Insulation for Commercial and Industrial Applications*

### ❖ Combustibility

- Rated Non-combustible per NFPA Standard 220 when tested in accordance with ASTM E136, *Standard Test Method for Assessing Combustibility of Materials Using a Vertical Tube Furnace at 750°C*



# ENVIRONMENTAL PRODUCT DECLARATION



Thermafiber® Mineral Wool

According to ISO 14025,  
EN 15804 and ISO 21930:2017

## ❖ Water Vapor Permeance

- 50 perms when tested in accordance with ASTM E96, *Standard Test Methods for Water Vapor Transmission of Materials*

## ❖ Surface Burning Characteristics

- Flame Spread 0, Smoke Developed 0 for unfaced products when tested in accordance with ASTM E84, *Standard Test Method for Surface Burning Characteristics of Building Materials*

## ❖ Water Vapor Sorption

- Absorption of less than 1% by volume when tested in accordance with ASTM C1104, *Standard Test Method for Determining the Water Vapor Sorption of Unfaced Mineral Fiber Insulation*

## ❖ Stability

- Linear Shrinkage <2% @1200°F (650°C) when tested in accordance with ASTM C356, *Standard Test Method for Linear Shrinkage of Preformed High-Temperature Thermal Insulation Subjected to Soaking Heat*

## 1.6. Properties of Declared Product as Delivered

When installed in typical building and construction assemblies according to all applicable Owens Corning specifications, recommendations and guidelines, Thermafiber® Mineral Wool Insulation delivers its advertised R-value.

## 1.7. Material Composition

Thermafiber® Mineral Wool Insulation consists of two major components, charge and binder. The primary raw material used is blast furnace slag, a by-product of the steel industry. The reuse of slag into mineral wool prevents this material from being discarded into landfills and results in a minimum total recycled content of 70% in the final product. These materials are sourced locally and transported to the manufacturing facility.

| Material Component | Material Component % |        |
|--------------------|----------------------|--------|
|                    | Wabash               | Joplin |
| <b>Charge</b>      |                      |        |
| Slag               | 75-80%               | 67-70% |
| Feldspar           | 8-10%                | 6-9%   |
| Trap rock          | 6-9%                 | 18-21% |
| <b>Binder</b>      |                      |        |
| Resin              | 1-4%                 | 1-4%   |
| Urea               | 1-3%                 | 1-3%   |
| Other              | < 1%                 | < 1%   |

## 1.8. Manufacturing

### Manufacturing Locations

Primary data from the Joplin, Missouri manufacturing facility were used for the underlying life cycle assessment.





Thermafiber® Mineral Wool



According to ISO 14025,  
EN 15804 and ISO 21930:2017

Manufacturing Process

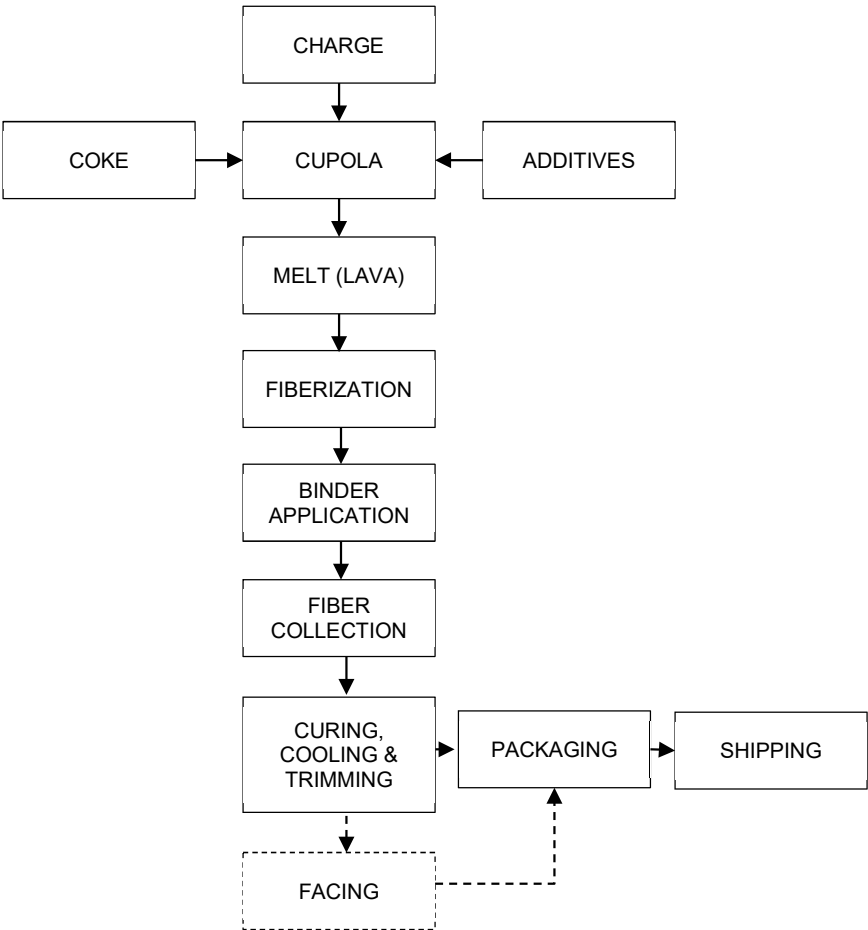


Figure 2. Process Flow Diagram for Manufacturing of Mineral Wool Insulation

The diagram above for Thermafiber® Mineral Wool Insulation is representative of the processes used by the manufacturing facility.





# ENVIRONMENTAL PRODUCT DECLARATION



Thermafiber® Mineral Wool

According to ISO 14025,  
EN 15804 and ISO 21930:2017

## 1.9. Packaging

Thermafiber® Mineral Wool Insulation products are packaged using LDPE (low-density polyethylene) film in the form of bags or plastic film. Regional disposal scenarios for the U.S. were used as a default assumption for the packaging waste generated during installation. Disposal rates used by material type and waste treatment method are shown in the table below.

| Country/Region | Material Type           | Recycling Rate | Landfill Rate | Incineration Rate |
|----------------|-------------------------|----------------|---------------|-------------------|
| United States  | Plastics                | 15%            | 68%           | 17%               |
|                | Metals                  | 57%            | 34%           | 9%                |
|                | Pulp (cardboard, paper) | 75%            | 20%           | 5%                |

## 1.10. Transportation

The product outbound transportation from manufacturing facility is by diesel-truck. The average distance from the Joplin manufacturing facility to construction site for Thermafiber® Mineral Wool Insulation is 1,044 mi (1,680 km).

## 1.11. Product Installation



Thermafiber® Mineral Wool Insulation products are made for easy handling, fabrication and installation. As a semi-rigid product that is easy to cut and install, its flexibility allows it to conform to building shapes and construction irregularities. It comes in standard-sized sheets and is easily cut with a serrated knife. Custom sizes are available upon request.

The boards and batts can be friction fitted in between studs with the ends of each piece butted closely together to fill all voids.

Rainscreen and cavity wall systems vary greatly from types of hangers and how they are installed. Generally, mineral wool insulation is installed with abutted joints and mechanically secured and attached to the building substrate.

Mineral wool can also be mechanically attached depending on the application.

# ENVIRONMENTAL PRODUCT DECLARATION



Thermafiber® Mineral Wool

According to ISO 14025,  
EN 15804 and ISO 21930:2017

## 1.12. Use

Due to its nature, Thermafiber® Mineral Wool Insulation is a passive device requiring no utilities or maintenance over its useful life. Provided the mineral wool is used as intended, during the use phase, reductions in a building's energy consumption do occur; however, the energy savings from the use of thermal insulation have not been included within the system boundaries.

## 1.13. Reference Service Life and Estimated Building Service Life

The product is assumed to remain in service for the life of the building, 75 years.

## 1.14. Reuse, Recycling, and Energy Recovery

Thermafiber® Mineral Wool Insulation may be reused; however, no formal recycling programs currently exist for mineral wool insulation in North America.

## 1.15. Disposal

The End of Life stage modeled for mineral wool insulation consisted of the transportation by tractor-trailer truck of the insulation for an assumed distance of 100 miles (161 km) to a landfill and the subsequent disposal of the used insulation in the landfill.

# 2. Life Cycle Assessment Background Information

## 2.1. Function and Functional Unit

The functional unit is 1 m<sup>2</sup> of insulation material with a thickness that gives an average thermal resistance  $R_{SI} = 1$  m<sup>2</sup>K/W and with a building service life of 75 years. Faced Thermafiber® Mineral Wool Insulation additionally has 1 m<sup>2</sup> of a facing, which is applied to the top surface of the insulation material. For this study, the declared unit amount of the facing is 1 m<sup>2</sup>, and the amount of the declared unit required for the functional unit is 1 m<sup>2</sup>.

Table 1. Functional Unit Properties of Thermafiber® Mineral Wool Insulation

| Thermafiber® Mineral Wool Insulation, SAFB™<br>(2.5pcf   40 kg/m³), Joplin |                                                                                                                                   |
|----------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| Functional unit                                                            | 1 m <sup>2</sup> of insulation material with a thickness that gives an average thermal resistance $R_{SI} = 1$ m <sup>2</sup> K/W |
| Mass of Functional unit                                                    | 1.12E+00 kg                                                                                                                       |
| Thickness to achieve Functional unit                                       | 3.50E-02 m                                                                                                                        |

Table 2. Declared Unit Properties of Facing for Faced Thermafiber® Mineral Wool Insulation

| Facing           | Mass of Declared unit (1 m <sup>2</sup> ) | Description                               |
|------------------|-------------------------------------------|-------------------------------------------|
| 5225T-White      | 5.81E-02 kg                               | Plain White Foil Scrim (2x2) Polyethylene |
| 5263 Printed 5x5 | 6.35E-02 kg                               | Printed Foil Scrim (5x5) Polyethylene     |
| VL6307           | 6.20E-02 kg                               | Black Nonwoven Glass Fiber Mat            |



ENVIRONMENTAL PRODUCT DECLARATION



Thermafiber® Mineral Wool

According to ISO 14025,  
EN 15804 and ISO 21930:2017

2.2. System Boundary

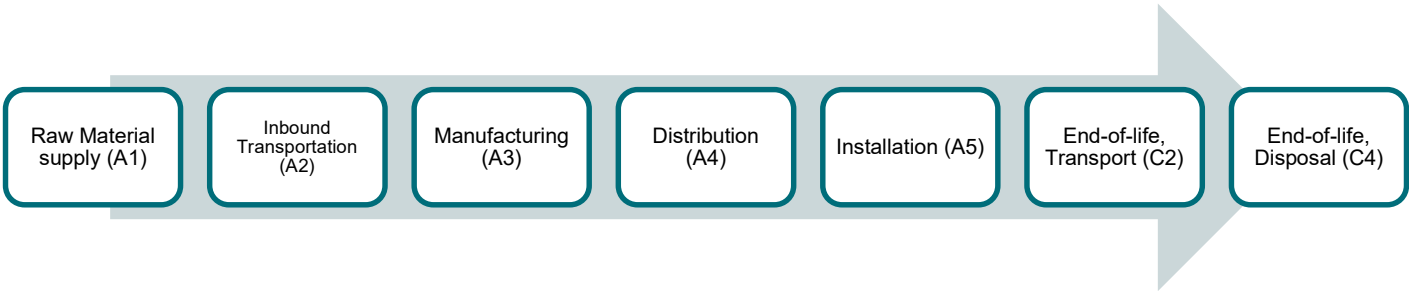


Figure 3. System Boundary of Thermafiber® Mineral Wool Insulation

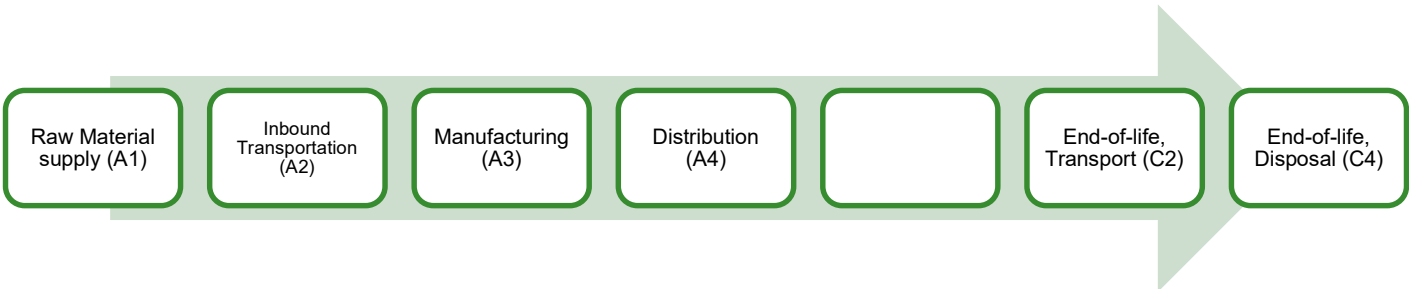


Figure 4. System Boundary of Facing for Faced Thermafiber® Mineral Wool Insulation



# ENVIRONMENTAL PRODUCT DECLARATION



Thermafiber® Mineral Wool

According to ISO 14025,  
EN 15804 and ISO 21930:2017

The system boundaries for this study include inputs and outputs for the following life cycle stages for mineral wool insulation:

- ❖ **Raw Material supply (A1)** – applicable to Thermafiber® Mineral Wool Insulation and Facing
  - extraction of resources and production of raw materials
  - collection and processing of recycled materials
  - extraction of resources and production of packaging materials for finished goods
- ❖ **Inbound Transportation (A2)** – applicable to Thermafiber® Mineral Wool Insulation and Facing
  - transportation of all input materials to manufacturing facilities
- ❖ **Manufacturing (A3)** – applicable to Thermafiber® Mineral Wool Insulation and Facing
  - electricity and water use and combustion of natural gas and coke (consumption and associated emissions)
  - transportation of fuels and consumable materials used in manufacturing
  - transportation of waste materials for recycling externally
  - transportation of waste-to-landfill waste to landfill as well as disposal in landfill
  - air emissions from fiber collection as well as from curing, cooling, cutting and trimming bonded mineral wool insulation including other releases to environmental media
- ❖ **Distribution (A4)** – applicable to Thermafiber® Mineral Wool Insulation and Facing
  - transportation from manufacturing facilities to distribution centers
  - transportation from distribution centers to construction site
- ❖ **Installation (A5)** – applicable to Thermafiber® Mineral Wool Insulation
  - transportation and disposal of packaging waste
- ❖ **End-of-life, Transport (C2)** – applicable to Thermafiber® Mineral Wool Insulation and Facing
  - transportation from building deconstruction site to landfill
- ❖ **End-of-life, Disposal (C4)** – applicable to Thermafiber® Mineral Wool Insulation and Facing
  - disposal in landfill

## 2.3. Estimates and Assumptions

Thermafiber® Mineral Wool Insulation is a passive device requiring no utilities or maintenance over its useful life; it is assumed that the product remains in service for the 75-year reference service.

## 2.4. Cut-off Criteria

Per section 2.9 of the governing PCR, the procedure detailed in ISO 21930, section 7.1.8 was followed regarding the exclusion of inputs and outputs. For energy, mass and environmental impacts, the cut-off criteria were 1% per the standard. Per the standard "the total of neglected input flows per module shall be a maximum of 5% of energy usage, mass and environmental impacts." Flows excluded for this study include infrastructure, capital goods and workforce burdens. Inputs and outputs associated with infrastructure (construction, maintenance and demolition of buildings/plants, road surfaces, transport equipment, etc.) are not included. This choice is based on experience from previous LCAs where the contribution from these items was negligible due to the long lifetime of the equipment compared to the high production volume of material during that lifetime.



# ENVIRONMENTAL PRODUCT DECLARATION



Thermafiber® Mineral Wool



According to ISO 14025,  
EN 15804 and ISO 21930:2017

## 2.5. Data Sources

---

Primary data was collected from the location listed in the Manufacturing section. Life cycle modeling and calculation of potential environmental impacts were conducted using the LCA software SimaPro 9, version 9.1, developed by PRé Consultants bv. The LCI database used for secondary data was the ecoinvent 3.6 database, provided with the Developer version of the software. In situations where LCI databases did not contain life cycle inventory data for certain specific materials or processes used in either the manufacturing of precursor, input raw materials or the manufacturing of the mineral wool insulation itself, LCI data for a similar material or process was used as a substitute. In order to determine the most representative substitute, preliminary analyses were conducted.

## 2.6. Data Quality

---

To determine how representative the data used to model the life cycle of Owens Corning® Thermafiber® Mineral Wool Insulation manufactured in 2020 is, the temporal, geographical and technological aspects of the data were assessed. For the Owens Corning facilities analyzed in the underlying LCA study, the data used adequately represents the technology used in 2020 in the United States.

## 2.7. Period under Review

---

For the manufacturing facilities considered in the LCA, Owens Corning primary data was collected for the 2020 calendar year.

## 2.8. Allocation

---

The products studied in this analysis are all members of the Thermafiber® Mineral Wool Insulation product family. Plants reported the total amount of Thermafiber® Mineral Wool Insulation produced as well as the amount produced of each individual product. In general, the characteristics that differentiate one product from another within the family are its density, form and the use and type of a binder. Particular product application can be considered another differentiating characteristic; however, these three attributes are the main physical properties that distinguish one product from another.

Exceptions to this are Faced Thermafiber® Mineral Wool Insulation. For these products, it was possible to avoid additional allocation by treating the facing materials as separate modular processes, the LCIs of which were analyzed separately. Aside from those mentioned, no other allocation modeling considerations were necessary.

# ENVIRONMENTAL PRODUCT DECLARATION



Thermafiber® Mineral Wool

According to ISO 14025,  
EN 15804 and ISO 21930:2017

## 3. Life Cycle Assessment Scenarios

**Table 3. Transport to the building site (A4)**

|                                                                                                                | Thermafiber®<br>Mineral Wool Insulation, SAFB™ (2.5 pcf   40 kg/m³), JOPLIN<br>(1 m², R <sub>SI</sub> =1) |         |
|----------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|---------|
| Fuel type                                                                                                      | diesel, low-sulfur                                                                                        |         |
| Liters of fuel                                                                                                 | 4.88E-03                                                                                                  | l/100km |
| Vehicle type                                                                                                   | Transport, freight, lorry<br>16-32 metric ton, EURO3                                                      |         |
| Transport distance                                                                                             | 1.68E+03                                                                                                  | km      |
| Capacity utilization<br>(including empty runs, mass based)†                                                    | 63%                                                                                                       | %       |
| Gross density of products transported                                                                          | 3.20E+01                                                                                                  | kg/m³   |
| Weight of products transported<br>(if gross density not reported)                                              | 1.12E+00                                                                                                  | kg      |
| Volume of products transported<br>(if gross density not reported)                                              | 3.50E-02                                                                                                  | m³      |
| Capacity utilization volume factor<br>(factor: =1 or <1 or ≥ 1 for compressed<br>or nested packaging products) | 1                                                                                                         | -       |

† EcoTransIT. World. Ecological Transport Information Tool for Worldwide Transports Methodology and Data - Update 4th December 2014.  
([https://www.ecotransit.org/download/EcoTransIT\\_World\\_Methodology\\_Report\\_2014-12-04.pdf](https://www.ecotransit.org/download/EcoTransIT_World_Methodology_Report_2014-12-04.pdf))

**Table 4. Transport to the building site (A4) for Facing, 1 m²**

|                                                                                                                | 5225T-White                                          | 5263 Printed 5x5 | VL6307   |
|----------------------------------------------------------------------------------------------------------------|------------------------------------------------------|------------------|----------|
| Fuel type                                                                                                      | diesel, low-sulfur                                   |                  |          |
| Liters of fuel<br>(l/100km)                                                                                    | 2.53E-04                                             | 2.76E-04         | 2.70E-04 |
| Vehicle type                                                                                                   | Transport, freight, lorry<br>16-32 metric ton, EURO3 |                  |          |
| Transport distance (km)                                                                                        | 1.68E+03                                             | 1.68E+03         | 1.68E+03 |
| Capacity utilization<br>(including empty runs, mass based)‡                                                    | 63%                                                  | 63%              | 63%      |
| Gross density of products transported<br>(kg/m³)                                                               | 3.81E+02                                             | 3.25E+02         | 9.97E+01 |
| Weight of products transported<br>(if gross density not reported)<br>(kg)                                      | 5.81E-02                                             | 6.35E-02         | 6.20E-02 |
| Volume of products transported<br>(if gross density not reported)<br>(m³)                                      | 1.52E-04                                             | 1.96E-04         | 6.22E-04 |
| Capacity utilization volume factor<br>(factor: =1 or <1 or ≥ 1 for compressed<br>or nested packaging products) | 1                                                    | 1                | 1        |

‡ EcoTransIT. World. Ecological Transport Information Tool for Worldwide Transports Methodology and Data - Update 4th December 2014.  
([https://www.ecotransit.org/download/EcoTransIT\\_World\\_Methodology\\_Report\\_2014-12-04.pdf](https://www.ecotransit.org/download/EcoTransIT_World_Methodology_Report_2014-12-04.pdf))





# ENVIRONMENTAL PRODUCT DECLARATION



Thermafiber® Mineral Wool



According to ISO 14025,  
EN 15804 and ISO 21930:2017

**Table 5. Installation into the building (A5)**

|                                                                                                                                                | Thermafiber®<br>Mineral Wool Insulation, SAFB™<br>(2.5 pcf   40 kg/m³), JOPLIN<br>(1 m², R <sub>SI</sub> =1) |                    |
|------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|--------------------|
| Ancillary materials                                                                                                                            | 0.00E+00                                                                                                     | kg                 |
| Net freshwater consumption<br>specified by water source and<br>fate (amount evaporated,<br>amount disposed to sewer)                           | 0.00E+00                                                                                                     | m³                 |
| Other resources                                                                                                                                | 0.00E+00                                                                                                     | kg                 |
| Electricity consumption                                                                                                                        | 0.00E+00                                                                                                     | kWh                |
| Other energy carriers                                                                                                                          | 0.00E+00                                                                                                     | MJ                 |
| Product loss per functional<br>unit                                                                                                            | 0.00E+00                                                                                                     | kg                 |
| Waste materials at the<br>construction site before<br>waste processing, generated<br>by product installation                                   | 1.25E-02                                                                                                     | kg                 |
| Output materials resulting<br>from on-site waste processing<br>(specified by route; e.g. for<br>recycling, energy recovery<br>and/or disposal) | 0.00E+00                                                                                                     | kg                 |
| Biogenic carbon contained<br>in packaging                                                                                                      | 0.00E+00                                                                                                     | kg CO <sub>2</sub> |
| Direct emissions to ambient<br>air, soil and water                                                                                             | 0.00E+00                                                                                                     | kg                 |
| VOC content                                                                                                                                    | NA                                                                                                           | µg/m³              |

**Table 6. Reference Service Life**

| RSL                                                                                                                                                        | 75 years                                                                                |
|------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|
| Declared product properties (at the gate) and finishes, etc.                                                                                               | Not applicable (Insulation properties require installation into a building.)            |
| Design application parameters (if instructed by the manufacturer), including references to the appropriate practices and application codes)                | Install per instructions                                                                |
| An assumed quality of work, when installed in accordance with the manufacturer's instructions                                                              | Will meet R-value (Installer should install per manufacturer instructions)              |
| Outdoor environment, (if relevant for outdoor applications), e.g. weathering, pollutants, UV and wind exposure, building orientation, shading, temperature | Not applicable (Indoor or covered in outdoor applications)                              |
| Indoor environment, (if relevant for indoor applications), e.g. temperature, moisture, chemical exposure)                                                  | Product should be kept dry                                                              |
| Use conditions, e.g. frequency of use, mechanical exposure.                                                                                                | Not applicable (Insulation is a passive product which is not used directly during life) |
| Maintenance, e.g. required frequency, type and quality of replacement components                                                                           | None needed (Insulation does not need maintenance during its use)                       |



# ENVIRONMENTAL PRODUCT DECLARATION



Thermafiber® Mineral Wool

According to ISO 14025,  
EN 15804 and ISO 21930:2017

**Table 7. End-of-life, Transport (C2)**

|                                                                                                                                   |                                                                                                                                                                                                                       | Thermafiber®<br>Mineral Wool Insulation,<br>SAFB™ (2.5 pcf   40 kg/m³),<br>JOPLIN<br>(1 m², R <sub>SI</sub> =1) | Facing<br>(1 m²) |                    |
|-----------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|------------------|--------------------|
| Assumptions for scenario development<br>(description of deconstruction, collection, recovery, disposal method and transportation) | Although reuse and recycling of mineral wool insulation at its end of life is possible, there are no formal programs for collection and transport. It is assumed that all product is sent to landfill at end of life. |                                                                                                                 |                  |                    |
| Collection process (specified by type)                                                                                            | Collected separately                                                                                                                                                                                                  | 0.00E+00                                                                                                        | [0.00E+00]       | kg                 |
|                                                                                                                                   | Collected with mixed construction waste                                                                                                                                                                               | 1.12E+00                                                                                                        | [‡]              | kg                 |
| Recovery (specified by type)                                                                                                      | Reuse                                                                                                                                                                                                                 | 0.00E+00                                                                                                        | [0.00E+00]       | kg                 |
|                                                                                                                                   | Recycling                                                                                                                                                                                                             | 0.00E+00                                                                                                        | [0.00E+00]       | kg                 |
|                                                                                                                                   | Landfill                                                                                                                                                                                                              | 0.00E+00                                                                                                        | [0.00E+00]       | kg                 |
|                                                                                                                                   | Incineration                                                                                                                                                                                                          | 0.00E+00                                                                                                        | [0.00E+00]       | kg                 |
|                                                                                                                                   | Incineration with energy recovery                                                                                                                                                                                     | 0.00E+00                                                                                                        | [0.00E+00]       | kg                 |
|                                                                                                                                   | Energy conversion efficiency rate                                                                                                                                                                                     | 0.00E+00                                                                                                        | [0.00E+00]       |                    |
| Disposal (specified by type)                                                                                                      | Product or material for final deposition                                                                                                                                                                              | 0.00E+00                                                                                                        | [0.00E+00]       | kg                 |
| Removals of biogenic carbon (excluding packaging)                                                                                 |                                                                                                                                                                                                                       | 0.00E+00                                                                                                        | [0.00E+00]       | kg CO <sub>2</sub> |

‡ Value [kg] for Facing (1 m²) can be found in [Table 4](#) in row values for "Weight of products transported"

# ENVIRONMENTAL PRODUCT DECLARATION



Thermafiber® Mineral Wool

According to ISO 14025,  
EN 15804 and ISO 21930:2017

**Table 8. End-of-life, Disposal (C4)**

|                                                                                                                                      |                                                                                                                                                                                                                       | Thermafiber®<br>Mineral Wool Insulation,<br>SAFB™ (2.5 pcf   40 kg/m³),<br>JOPLIN<br>(1 m², R <sub>SI</sub> -1) | Facing (1 m²) |                    |
|--------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|---------------|--------------------|
| Assumptions for scenario development<br>(description of deconstruction, collection,<br>recovery, disposal method and transportation) | Although reuse and recycling of mineral wool insulation at its end of life is possible, there are no formal programs for collection and transport. It is assumed that all product is sent to landfill at end of life. |                                                                                                                 |               |                    |
| Collection process (specified by type)                                                                                               | Collected separately                                                                                                                                                                                                  | 0.00E+00                                                                                                        | [0.00E+00]    | kg                 |
|                                                                                                                                      | Collected with mixed construction waste                                                                                                                                                                               | 0.00E+00                                                                                                        | [0.00E+00]    | kg                 |
| Recovery (specified by type)                                                                                                         | Reuse                                                                                                                                                                                                                 | 0.00E+00                                                                                                        | [0.00E+00]    | kg                 |
|                                                                                                                                      | Recycling                                                                                                                                                                                                             | 0.00E+00                                                                                                        | [0.00E+00]    | kg                 |
|                                                                                                                                      | Landfill                                                                                                                                                                                                              | 0.00E+00                                                                                                        | [0.00E+00]    | kg                 |
|                                                                                                                                      | Incineration                                                                                                                                                                                                          | 0.00E+00                                                                                                        | [0.00E+00]    | kg                 |
|                                                                                                                                      | Incineration with energy recovery                                                                                                                                                                                     | 0.00E+00                                                                                                        | [0.00E+00]    | kg                 |
|                                                                                                                                      | Energy conversion efficiency rate                                                                                                                                                                                     | 0.00E+00                                                                                                        | [0.00E+00]    |                    |
| Disposal (specified by type)                                                                                                         | Product or material for final deposition                                                                                                                                                                              | 1.12E+00                                                                                                        | [‡]           | kg                 |
| Removals of biogenic carbon (excluding packaging)                                                                                    |                                                                                                                                                                                                                       | 0.00E+00                                                                                                        | [0.00E+00]    | kg CO <sub>2</sub> |

‡ Value [kg] for Facing (1 m²) can be found in [Table 4](#) in row values for "Weight of products transported"



# ENVIRONMENTAL PRODUCT DECLARATION



Thermafiber® Mineral Wool

According to ISO 14025,  
EN 15804 and ISO 21930:2017

## 4. Life Cycle Assessment Results

Table 9. Description of the system boundary modules

|                                                                              | PRODUCT STAGE       |           |               | CONSTRUCTION PROCESS STAGE  |                  | USE STAGE                     |             |        |             |               |                                                    |                                                   | END OF LIFE STAGE |           |                  |          | BENEFITS AND LOADS BEYOND THE SYSTEM BOUNDARY |          |
|------------------------------------------------------------------------------|---------------------|-----------|---------------|-----------------------------|------------------|-------------------------------|-------------|--------|-------------|---------------|----------------------------------------------------|---------------------------------------------------|-------------------|-----------|------------------|----------|-----------------------------------------------|----------|
|                                                                              | A1                  | A2        | A3            | A4                          | A5               | B1                            | B2          | B3     | B4          | B5            | B6                                                 | B7                                                | C1                | C2        | C3               | C4       | D                                             |          |
|                                                                              | Raw material supply | Transport | Manufacturing | Transport from gate to site | Assembly/Install | Use                           | Maintenance | Repair | Replacement | Refurbishment | Building Operational Energy Use During Product Use | Building Operational Water Use During Product Use | Deconstruction    | Transport | Waste processing | Disposal | Reuse, Recovery, Recycling Potential          |          |
| Thermafiber® Mineral Wool Insulation (1 m <sup>2</sup> , R <sub>SI</sub> -1) | x                   | x         | x             | x                           | x                | MND                           | MND         | MND    | MND         | MND           | MND                                                | MND                                               | MND               | x         | MND              | x        | MND                                           | 75 years |
| Facing for Faced Thermafiber® Mineral Wool Insulation (1 m <sup>2</sup> )    | x                   | x         | x             | x                           | MND              | MND                           | MND         | MND    | MND         | MND           | MND                                                | MND                                               | MND               | x         | MND              | x        | MND                                           | 75 years |
| EPD Type: Cradle to installation with end of life                            | Required            |           |               |                             |                  | Optional (Based on scenarios) |             |        |             |               |                                                    |                                                   | Required          |           |                  |          |                                               | Required |



# ENVIRONMENTAL PRODUCT DECLARATION



Thermafiber® Mineral Wool

According to ISO 14025,  
EN 15804 and ISO 21930:2017

## 4.1. Life Cycle Impact Assessment Results

**Table 10 LCIA Results for North America (TRACI) for Thermafiber® Mineral Wool Insulation, SAFB™ (2.5 pcf | 40 kg/m³), JOPLIN (1 m², R<sub>SI</sub>=1)**

| TRACI v2.1                      | A1 - A3  | A4       | A5       | B1 - B7 | C1  | C2       | C3  | C4       | A1-C4    |
|---------------------------------|----------|----------|----------|---------|-----|----------|-----|----------|----------|
| GWP 100 [kg CO <sub>2</sub> eq] | 8.78E-01 | 2.63E-01 | 3.26E-03 | MND     | MND | 2.52E-02 | MND | 2.77E-03 | 1.17E+00 |
| ODP [kg CFC-11 eq]              | 1.20E-07 | 6.36E-08 | 1.58E-10 | MND     | MND | 6.09E-09 | MND | 6.23E-10 | 1.91E-07 |
| AP [kg SO <sub>2</sub> eq]      | 3.47E-03 | 1.64E-03 | 5.35E-06 | MND     | MND | 1.57E-04 | MND | 2.67E-05 | 5.29E-03 |
| EP [kg N eq]                    | 8.59E-04 | 1.71E-04 | 1.18E-06 | MND     | MND | 1.64E-05 | MND | 2.31E-06 | 1.05E-03 |
| POCP [kg O <sub>3</sub> eq]     | 6.13E-02 | 4.75E-02 | 1.41E-04 | MND     | MND | 4.55E-03 | MND | 8.08E-04 | 1.14E-01 |
| ADP <sub>fossil</sub> [MJ, LHV] | 1.47E+00 | 5.63E-01 | 1.40E-03 | MND     | MND | 5.39E-02 | MND | 5.55E-03 | 2.09E+00 |

[GWP 100 - Global Warming Potential]; [ODP - Ozone Depletion Potential]; [AP - Acidification Potential]; [EP - Eutrophication Potential]; [POCP - Smog Formation Potential]; [ADP<sub>fossil</sub> - Abiotic Resource Depletion Potential of Non-renewable (fossil) energy resources]

**Table 11 LCIA Results for North America (TRACI) for Facing (1 m²), Cradle-to-Grave (A1-C4)**

|                  | GWP 100<br>[kg CO <sub>2</sub> eq] | ODP<br>[kg CFC-11 eq] | AP<br>[kg SO <sub>2</sub> eq] | EP<br>[kg N eq] | POCP<br>[kg O <sub>3</sub> eq] | ADP <sub>fossil</sub><br>[MJ, LHV] |
|------------------|------------------------------------|-----------------------|-------------------------------|-----------------|--------------------------------|------------------------------------|
| Facing (1 m²)    | A1-C4                              | A1-C4                 | A1-C4                         | A1-C4           | A1-C4                          | A1-C4                              |
| 5225T-White      | 4.67E-01                           | 2.81E-08              | 2.65E-03                      | 2.21E-04        | 3.45E-02                       | 4.07E-01                           |
| 5263 Printed 5x5 | 4.84E-01                           | 2.90E-08              | 2.71E-03                      | 2.28E-04        | 3.58E-02                       | 4.89E-01                           |
| VL6307           | 1.61E-01                           | 1.59E-08              | 1.01E-03                      | 8.18E-05        | 1.70E-02                       | 2.62E-01                           |

[GWP 100 - Global Warming Potential]; [ODP - Ozone Depletion Potential]; [AP - Acidification Potential]; [EP - Eutrophication Potential]; [POCP - Smog Formation Potential]; [ADP<sub>fossil</sub> - Abiotic Resource Depletion Potential of Non-renewable (fossil) energy resources]

Results by life cycle module, the aggregate of which are shown in **Table 11**, can be found in **Appendix B**.

## 4.2. Life Cycle Inventory Results

**Table 12 Resource Use for Thermafiber® Mineral Wool Insulation, SAFB™ (2.5 pcf | 40 kg/m³), JOPLIN (1 m², R<sub>SI</sub>=1)**

| Parameter       | A1 - A3  | A4       | A5       | B1 - B7 | C1  | C2       | C3  | C4       | A1-C4    |
|-----------------|----------|----------|----------|---------|-----|----------|-----|----------|----------|
| RPRE [MJ, LHV]  | 1.22E+00 | 4.57E-03 | 1.37E-05 | MND     | MND | 4.37E-04 | MND | 1.43E-04 | 1.23E+00 |
| RPRM [MJ, LHV]  | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND     | MND | 0.00E+00 | MND | 0.00E+00 | 0.00E+00 |
| NRPRE [MJ, LHV] | 1.93E+01 | 3.99E+00 | 9.91E-03 | MND     | MND | 3.82E-01 | MND | 4.01E-02 | 2.37E+01 |
| NRPRM [MJ, LHV] | 2.64E-01 | 0.00E+00 | 0.00E+00 | MND     | MND | 0.00E+00 | MND | 0.00E+00 | 2.64E-01 |
| SM [kg]         | 1.16E+00 | 0.00E+00 | 0.00E+00 | MND     | MND | 0.00E+00 | MND | 0.00E+00 | 1.16E+00 |
| RSF [MJ, LHV]   | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND     | MND | 0.00E+00 | MND | 0.00E+00 | 0.00E+00 |
| NRSF [MJ, LHV]  | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND     | MND | 0.00E+00 | MND | 0.00E+00 | 0.00E+00 |
| RE [MJ, LHV]    | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND     | MND | 0.00E+00 | MND | 0.00E+00 | 0.00E+00 |
| FW [m³]         | 5.58E-03 | 8.71E-05 | 3.94E-07 | MND     | MND | 8.34E-06 | MND | 7.69E-07 | 5.68E-03 |

[RPRE - Renewable primary energy used as energy carrier (fuel)]; [RPRM - Renewable primary resources with energy content used as material]; [NRPRE - Non-renewable primary resources used as an energy carrier (fuel)]; [NRPRM - Non-renewable primary resources with energy content used as material]; [SM - Secondary materials]; [RSF - Renewable secondary fuels]; [NRSF - Non-renewable secondary fuels]; [RE - Recovered energy]; [FW - Use of net fresh water resources]



# ENVIRONMENTAL PRODUCT DECLARATION



Thermafiber® Mineral Wool

According to ISO 14025,  
EN 15804 and ISO 21930:2017

**Table 13 Resource Use for Facing (1 m<sup>2</sup>), Cradle-to-Grave (A1-C4)**

|                  | RPRE<br>[MJ, LHV] | RPRM<br>[MJ, LHV] | NRPRE<br>[MJ, LHV] | NRPRM<br>[MJ, LHV] | SM<br>[kg] | RSF<br>[MJ, LHV] | NRSF<br>[MJ, LHV] | RE<br>[MJ, LHV] | FW<br>[m <sup>3</sup> ] |
|------------------|-------------------|-------------------|--------------------|--------------------|------------|------------------|-------------------|-----------------|-------------------------|
| Facing           | A1-C4             | A1-C4             | A1-C4              | A1-C4              | A1-C4      | A1-C4            | A1-C4             | A1-C4           | A1-C4                   |
| 5225T-White      | 4.33E-01          | 0.00E+00          | 5.59E+00           | 6.56E-01           | 0.00E+00   | 0.00E+00         | 0.00E+00          | 0.00E+00        | 2.97E-03                |
| 5263 Printed 5x5 | 4.57E-01          | 0.00E+00          | 6.25E+00           | 1.48E+00           | 0.00E+00   | 0.00E+00         | 0.00E+00          | 0.00E+00        | 3.36E-03                |
| VL6307           | 9.37E-02          | 0.00E+00          | 2.48E+00           | 8.56E-01           | 0.00E+00   | 0.00E+00         | 0.00E+00          | 0.00E+00        | 1.25E-03                |

[RPRE - Renewable primary energy used as energy carrier (fuel)]; [RPRM - Renewable primary resources with energy content used as material]; [NRPRE - Non-renewable primary resources used as an energy carrier (fuel)]; [NRPRM - Non-renewable primary resources with energy content used as material]; [SM - Secondary materials]; [RSF - Renewable secondary fuels]; [NRSF - Non-renewable secondary fuels]; [RE - Recovered energy]; [FW - Use of net fresh water resources]

Results by life cycle module, the aggregate of which are shown in **Table 13**, can be found in **Appendix C**.

**Table 14 Output Flows and Waste Categories for Thermafiber® Mineral Wool Insulation, SAFB™ (2.5 pcf | 40 kg/m<sup>3</sup>), JOPLIN (1 m<sup>2</sup>, Rsi-1)**

| Parameter                       | A1 - A3  | A4       | A5       | B1 - B7 | C1  | C2       | C3  | C4       | A1-C4    |
|---------------------------------|----------|----------|----------|---------|-----|----------|-----|----------|----------|
| HWD [kg]                        | 1.08E-05 | 1.01E-05 | 2.54E-08 | MND     | MND | 9.72E-07 | MND | 9.50E-08 | 2.20E-05 |
| NHWD [kg]                       | 1.60E+00 | 9.69E-04 | 3.69E-02 | MND     | MND | 9.28E-05 | MND | 2.24E+00 | 3.88E+00 |
| HLRW [kg] or [m <sup>3</sup> ]  | 1.28E-06 | 1.67E-08 | 5.16E-11 | MND     | MND | 1.60E-09 | MND | 3.69E-10 | 1.30E-06 |
| ILLRW [kg] or [m <sup>3</sup> ] | 1.95E-05 | 2.67E-05 | 6.58E-08 | MND     | MND | 2.55E-06 | MND | 2.61E-07 | 4.90E-05 |
| CRU [kg]                        | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND     | MND | 0.00E+00 | MND | 0.00E+00 | 0.00E+00 |
| MR [kg]                         | 3.24E-01 | 0.00E+00 | 7.16E-03 | MND     | MND | 0.00E+00 | MND | 0.00E+00 | 3.31E-01 |
| MER [kg]                        | 0.00E+00 | 0.00E+00 | 1.06E-03 | MND     | MND | 0.00E+00 | MND | 0.00E+00 | 1.06E-03 |
| EE [MJ, LHV]                    | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND     | MND | 0.00E+00 | MND | 0.00E+00 | 0.00E+00 |

[HWD - Hazardous waste disposed]; [NHWD - Non-hazardous waste disposed]; [HLRW - High-level radioactive waste, conditioned, to final repository]; [ILLRW - Intermediate- and low-level radioactive waste, conditioned, to final repository]; [CRU - Components for re-use]; [MR - Materials for recycling]; [MER - Materials for energy recovery]; [EE - Exported energy];

**Table 15 Output Flows and Waste Categories for Facing (1 m<sup>2</sup>), Cradle-to-Grave (A1-C4)**

|                  | HWD<br>[kg] | NHWD<br>[kg] | HLRW<br>[kg] or [m <sup>3</sup> ] | ILLRW<br>[kg] or [m <sup>3</sup> ] | CRU<br>[kg] | MR<br>[kg] | MER<br>[kg] | EE<br>[MJ, LHV] |
|------------------|-------------|--------------|-----------------------------------|------------------------------------|-------------|------------|-------------|-----------------|
| Facing           | A1-C4       | A1-C4        | A1-C4                             | A1-C4                              | A1-C4       | A1-C4      | A1-C4       | A1-C4           |
| 5225T-White      | 8.53E-05    | 1.84E-01     | 7.52E-07                          | 8.48E-06                           | 0.00E+00    | 0.00E+00   | 0.00E+00    | 0.00E+00        |
| 5263 Printed 5x5 | 8.54E-05    | 1.93E-01     | 8.47E-07                          | 9.00E-06                           | 0.00E+00    | 0.00E+00   | 0.00E+00    | 0.00E+00        |
| VL6307           | 2.77E-06    | 1.35E-01     | 5.33E-07                          | 5.37E-06                           | 0.00E+00    | 0.00E+00   | 0.00E+00    | 0.00E+00        |

[HWD - Hazardous waste disposed]; [NHWD - Non-hazardous waste disposed]; [HLRW - High-level radioactive waste, conditioned, to final repository]; [ILLRW - Intermediate- and low-level radioactive waste, conditioned, to final repository]; [CRU - Components for re-use]; [MR - Materials for recycling]; [MER - Materials for energy recovery]; [EE - Exported energy];

Results by life cycle module, the aggregate of which are shown in **Table 15**, can be found in **Appendix D**.



# ENVIRONMENTAL PRODUCT DECLARATION



Thermafiber® Mineral Wool

According to ISO 14025,  
EN 15804 and ISO 21930:2017

**Table 16 Carbon Emissions and Removals for Thermafiber® Mineral Wool Insulation, SAFB™ (2.5 pcf | 40 kg/m³), JOPLIN (1 m², R<sub>SI</sub>=1)**

| Parameter                  | A1 - A3  | A4       | A5       | B1 - B7 | C1  | C2       | C3  | C4       | A1-C4    |
|----------------------------|----------|----------|----------|---------|-----|----------|-----|----------|----------|
| BCRP [kg CO <sub>2</sub> ] | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND     | MND | 0.00E+00 | MND | 0.00E+00 | 0.00E+00 |
| BCEP [kg CO <sub>2</sub> ] | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND     | MND | 0.00E+00 | MND | 0.00E+00 | 0.00E+00 |
| BCRK [kg CO <sub>2</sub> ] | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND     | MND | 0.00E+00 | MND | 0.00E+00 | 0.00E+00 |
| BCEK [kg CO <sub>2</sub> ] | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND     | MND | 0.00E+00 | MND | 0.00E+00 | 0.00E+00 |
| BCEW [kg CO <sub>2</sub> ] | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND     | MND | 0.00E+00 | MND | 0.00E+00 | 0.00E+00 |
| CCE [kg CO <sub>2</sub> ]  | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND     | MND | 0.00E+00 | MND | 0.00E+00 | 0.00E+00 |
| CCR [kg CO <sub>2</sub> ]  | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND     | MND | 0.00E+00 | MND | 0.00E+00 | 0.00E+00 |
| CWNR [kg CO <sub>2</sub> ] | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND     | MND | 0.00E+00 | MND | 0.00E+00 | 0.00E+00 |

[BCRP - Biogenic Carbon Removal from Product]; [BCEP - Biogenic Carbon Emission from Product]; [BCRK - Biogenic Carbon Removal from Packaging]; [BCEK - Biogenic Carbon Emission from Packaging]; [BCEW - Biogenic Carbon Emission from Combustion of Waste from Renewable Sources Used in Production Processes]; [CCE - Calcination Carbon Emissions]; [CCR - Carbonation Carbon Removals]; [CWNR - Carbon Emissions from Combustion of Waste from Non-Renewable Sources used in Production Processes]

**Table 17 Carbon Emissions and Removals for Facing (1 m²), Cradle-to-Grave (A1-C4)**

|                  | BCRP<br>[kg CO <sub>2</sub> ] | BCEP<br>[kg CO <sub>2</sub> ] | BCRK<br>[kg CO <sub>2</sub> ] | BCEK<br>[kg CO <sub>2</sub> ] | BCEW<br>[kg CO <sub>2</sub> ] | CCE<br>[kg CO <sub>2</sub> ] | CCR<br>[kg CO <sub>2</sub> ] | CWNR<br>[kg CO <sub>2</sub> ] |
|------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|------------------------------|------------------------------|-------------------------------|
| Facing           | A1-C4                         | A1-C4                         | A1-C4                         | A1-C4                         | A1-C4                         | A1-C4                        | A1-C4                        | A1-C4                         |
| 5225T-White      | 0.00E+00                      | 0.00E+00                      | 0.00E+00                      | 0.00E+00                      | 0.00E+00                      | 0.00E+00                     | 0.00E+00                     | 0.00E+00                      |
| 5263 Printed 5x5 | 0.00E+00                      | 0.00E+00                      | 0.00E+00                      | 0.00E+00                      | 0.00E+00                      | 0.00E+00                     | 0.00E+00                     | 0.00E+00                      |
| VL6307           | 0.00E+00                      | 0.00E+00                      | 0.00E+00                      | 0.00E+00                      | 0.00E+00                      | 0.00E+00                     | 0.00E+00                     | 0.00E+00                      |

[BCRP - Biogenic Carbon Removal from Product]; [BCEP - Biogenic Carbon Emission from Product]; [BCRK - Biogenic Carbon Removal from Packaging]; [BCEK - Biogenic Carbon Emission from Packaging]; [BCEW - Biogenic Carbon Emission from Combustion of Waste from Renewable Sources Used in Production Processes]; [CCE - Calcination Carbon Emissions]; [CCR - Carbonation Carbon Removals]; [CWNR - Carbon Emissions from Combustion of Waste from Non-Renewable Sources used in Production Processes]

Results by life cycle module, the aggregate of which are shown in [Table 17](#), can be found in [Appendix E](#).

## 4.3. Calculating Impact Category Results for Products with Specific Performance Properties

The environmental impact assessment results have been calculated for a reference mineral wool insulation product, SAFB™ (2.5 pounds per cubic foot | 40 kg/m³ density version). These results, found in [Table 10](#), are for the functional unit, which has a surface area of 1 m² and a thermal resistance of R<sub>SI</sub> = 1 m²K/W. In Imperial units, this thermal resistance, or R-value, is equivalent to 5.68 hr·ft²·°F/BTU. Thermafiber® Mineral Insulation is manufactured in a variety of thicknesses and has a wide array of facing material options. In order to calculate impact values for Thermafiber® Mineral Wool Insulation having a specific thickness with or without a specific facing material, the following equation can be used:

$$\text{Impact} = \left[ \text{Impact of Functional unit}^a \right] \times \left[ \text{Product Scaling Factor}^b \right] + \left[ \text{Impact of Facing material}^c \right]$$

Notes:

- Impact values can be found in [Table 10](#).
- Scaling factors for each product and thickness can be found in [Appendix A](#).
- Impact values for 1 m² of various facing materials can be found in [Appendix B](#). If product is unfaced, the impact value is 0.




Thermafiber® Mineral Wool

According to ISO 14025,  
EN 15804 and ISO 21930:2017

5. LCA Interpretation

The underlying LCA upon which this EPD is based considered the following six environmental impact categories: Global Warming Potential (GWP 100); Ozone Depletion Potential (ODP); Acidification Potential (AP); Eutrophication Potential (EP); Smog Formation Potential (POCP); and Abiotic Resource Depletion Potential of Non-renewable (fossil) energy resources (ADP<sub>fossil</sub>). The impact assessment results indicate that among the life cycle modules declared for Thermafiber® Mineral Wool Insulation, the *Manufacturing* (A3) life cycle module accounted for the majority of the potential environmental impact of each of these six impact categories.

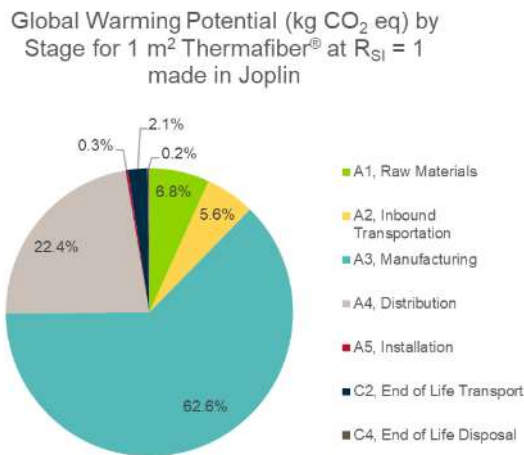

Although the intended application of mineral wool is for building envelope thermal insulation, the affected reductions in a building’s energy consumption when the mineral wool is used for this purpose were not included in the *Use* life cycle stage.



# ENVIRONMENTAL PRODUCT DECLARATION



Thermafiber® Mineral Wool

According to ISO 14025,  
EN 15804 and ISO 21930:2017

## 6. Additional Environmental Information

### 6.1. Environment and Health During Manufacturing

The Owens Corning manufacturing facility for Thermafiber® Mineral Wool Insulation maintain quality management systems.

### 6.2. Energy Savings During Use

Insulation is a passive device that requires no extra utilities to operate over its useful life. Insulation of a building is responsible for reducing the energy burden associated with heating and cooling of a building. The example below provides the net energy savings (energy saved minus life cycle energy of mineral wool insulation), as well as the carbon dioxide equivalent savings computed using the US EPA Greenhouse Gas Equivalencies Calculator<sup>1</sup>.

Example Basis:

- A two-story 2400 square foot home located insulated with Thermafiber® insulations to meet the 2015 International Energy Conservation Code for US locations and Ontario Building Code A3 Package 2017 for Toronto.

**Table 18. Energy and Carbon Equivalent Savings from Use of Joplin Products in a Home**

|                                                                                               | Zone 2<br>OBC | Zone<br>1A | Zone 2A        | Zone 3A   | Zone 3C          | Zone 4A   | Zone 5B   | Zone 5 A  | Zone 6A     | Zone 7     |
|-----------------------------------------------------------------------------------------------|---------------|------------|----------------|-----------|------------------|-----------|-----------|-----------|-------------|------------|
|                                                                                               | Toronto       | Miami      | New<br>Orleans | Atlanta   | San<br>Francisco | Baltimore | Seattle   | Chicago   | Minneapolis | Duluth     |
| <b>Heating and Cooling Energy Savings</b>                                                     |               |            |                |           |                  |           |           |           |             |            |
| Total Life Cycle MJ for<br>Thermafiber® Insulation<br>Products Used in Home                   | 82,591        | 35,832     | 42,244         | 56,101    | 56,101           | 61,461    | 61,461    | 61,461    | 77,253      | 77,253     |
| Total Annual MJ Energy<br>Saved for an Insulated<br>vs. Non-insulated Home                    | 167,754       | 4,220      | 17,936         | 51,698    | 77,019           | 97,065    | 92,845    | 122,386   | 174,084     | 213,121    |
| Payback Time (months)<br>for Heating and Cooling<br>Energy Saved                              | 5.9           | 101.9      | 28.3           | 13.0      | 8.7              | 7.6       | 7.9       | 6.0       | 5.3         | 4.3        |
| MJ Saved over the 75<br>Year Use Phase of<br>Building                                         | 12,498,950    | 280,684    | 1,302,952      | 3,821,229 | 5,720,330        | 7,218,424 | 6,901,908 | 9,117,525 | 12,979,064  | 15,906,844 |
| <b>Carbon Equivalent Savings</b>                                                              |               |            |                |           |                  |           |           |           |             |            |
| Total kg CO <sub>2</sub> eq for<br>Thermafiber® Products<br>Used in Home (Embodied<br>Carbon) | 3,878         | 1,682      | 1,983          | 2,634     | 2,634            | 2,886     | 2,886     | 2,886     | 3,627       | 3,627      |
| Annual Savings kg CO <sub>2</sub><br>eq from heating and<br>cooling (Operational<br>Carbon)   | 29,937        | 754        | 3,175          | 9,253     | 13,789           | 17,327    | 16,601    | 21,863    | 31,116      | 38,102     |
| Payback Time (months)<br>for CO <sub>2</sub> eq. Saved                                        | 1.6           | 26.8       | 7.5            | 3.4       | 2.3              | 2.0       | 2.1       | 1.6       | 1.4         | 1.1        |
| Annual Number of<br>Passenger Vehicles<br>Driven                                              | 7.2           | 0.2        | 0.8            | 2.2       | 3.3              | 4.2       | 4.0       | 5.2       | 7.5         | 9.1        |

<sup>1</sup> <https://www.epa.gov/energy/greenhouse-gas-equivalencies-calculator>



# ENVIRONMENTAL PRODUCT DECLARATION



Thermafiber® Mineral Wool



According to ISO 14025,  
EN 15804 and ISO 21930:2017

## 6.3. Environment and Health During Installation

---

This product is considered an article. 29 CFR 1910.1200(c) definition of an article is as follows: "Article" means a manufactured item other than a fluid or particle: (i) which is formed to a specific shape or design during manufacture; (ii) which has end use function(s) dependent in whole or in part upon its shape or design during end use; and (iii) which under normal conditions of use does not release more than very small quantities, e.g., minute or trace amounts of a hazardous chemical (as determined under paragraph (d) of this section), and does not pose a physical hazard or health risk to employees WHMIS Regulatory Status This product is considered an article per the Canadian Hazardous Products Regulation SOR/2015-17.

Manufactured articles which meet the definition of the Canadian Hazardous Products Act (any article that is formed to a specific shape or design during manufacture, the intended use of which when in that form is dependent in whole or in part on its shape or design, and that, when being installed, if the intended use of the article requires it to be installed, and under normal conditions of use, will not release or otherwise cause an individual to be exposed to a hazardous product) are not regulated by the Canadian Hazardous Products Regulation SOR/2015-17. The product's Safe Use Instruction Sheet includes exposure guidelines, engineering controls and individual protection measures.

## 6.4. Extraordinary Effects

---

No extraordinary effects or environmental impacts are expected due to destruction of the product by fire, water or mechanical means.

## 6.5. Delayed Emissions

---

No delayed emissions are expected from this product.



## ENVIRONMENTAL PRODUCT DECLARATION



Thermafiber® Mineral Wool

According to ISO 14025,  
EN 15804 and ISO 21930:2017

### 6.6. Environmental Activities and Certifications

#### Recycled Content



The material recycled content of Thermafiber® Mineral Wool Insulation has been verified by ICC-ES. The amounts and type of recycled content for Thermafiber® Mineral Wool Insulation products can be found in [Table 19](#) below.

**Table 19 Thermafiber® Mineral Wool Insulation Material Recycled Content by Weight**

| Product Name                                                                | % Pre-Consumer Recycled Content |                  | % Post-Consumer Recycled Content | % Total Recycled Content |
|-----------------------------------------------------------------------------|---------------------------------|------------------|----------------------------------|--------------------------|
|                                                                             | Standard Fiber                  | EPA Choice Fiber |                                  |                          |
| Thermafiber® SAFB™ Sound Control Insulation                                 | 70                              | N/A              | 0                                | 70                       |
| Thermafiber® Safing™ Insulation                                             | 70                              | N/A              | 0                                | 70                       |
| Thermafiber® FireSpan® 40 and 90 Curtain Wall Insulation                    | 70                              | 75               | 0                                | 70 – 75 <sup>1</sup>     |
| Thermafiber® Fire & Sound Guard® Plus Interior and Exterior Wall Insulation | 70                              | N/A              | 0                                | 70                       |
| Thermafiber® RainBarrier® Continuous Insulation                             | 70                              | 75               | 0                                | 70 – 75 <sup>1</sup>     |
| Thermafiber® VersaBoard® Commercial Insulation                              | 70                              | 75               | 0                                | 70 – 75 <sup>1</sup>     |

<sup>1</sup>The values represent the minimum and maximum range of available recycled content for the product. The actual recycled content amount for the product provided to the end user depends on the product formulation requested by the customer.

#### Health Product Declaration (HPD)



The Health Product Declaration® (HPD) is a document for reporting the material contents of products and the potential hazard associated with these materials. Products with Health Product Declarations can be found in the HPD Public Repository, and include the following Thermafiber® products: RainBarrier®, Fire & Sound Guard® Plus, FireSpan®, VersaBoard®, Safing, and SAFB™ Mineral Wool Insulation.



# ENVIRONMENTAL PRODUCT DECLARATION



Thermafiber® Mineral Wool



According to ISO 14025,  
EN 15804 and ISO 21930:2017

## Safety Act



Several of Owens Corning® Thermafiber® mineral wool insulation products and their supporting design and installation services have earned SAFETY Act Designation, retroactive to January 1, 2006, from the U.S. Department of Homeland Security. Use of these products and services will provide building owners and professionals with liability protection in the unfortunate event of an act of terrorism on their structure. Owens Corning is the first insulation manufacturer to be listed publicly with the Department of Homeland Security as having qualified technology carrying the SAFETY Act Designation.

Owens Corning® Thermafiber® products covered by this EPD with the SAFETY Act designation in various applications are:

- Thermafiber® FireSpan® 90 & 40
- Thermafiber® Safing
- Thermafiber® SAFB™ (Sound Attenuation Fire Blanket)

## Product Optimization



The results of this EPD have been compared with the previous EPD for the product. Full results are available in the UL Optimization Summary for the product.

Due to the level of reduction documented, the product qualifies for **LEED v4** Building product disclosure and optimization – environmental product declarations, Option 2. Multi-attribute optimization.

For **LEED v4.1** Environmental Product Declaration, Option 2. Embodied Carbon/LCA Optimization, the product is valued as 2 products due to 20%+ reduction in GWP and 5%+ reduction in two additional impact categories relative to baseline.



# ENVIRONMENTAL PRODUCT DECLARATION



Thermafiber® Mineral Wool

According to ISO 14025,  
EN 15804 and ISO 21930:2017

## Made with Renewable Electricity and Reduced Carbon Footprint

Thermafiber® Mineral Wool Insulation products carry SCS Global Services certification for "Made with Renewable Electricity" and "Reduced Carbon Footprint". Impact category results when electricity used during manufacturing is matched with wind energy produced as part of Owens Corning's Power Purchase Agreement can be found in the tables below. Cradle-to-gate (A1 - A3) values shown are based on the results from this EPD, which reflect the 2020 production year and are based on NERC regional grid values from the ecoinvent 3.6 LCI database implemented in SimaPro. Dataset and other methodological differences introduce a degree of variability leading to the reduction values shown below to differ from those that appear on certificates which reflect recent production data from both facilities.

| Thermafiber® Mineral Wool Insulation, SAFB™ (2.5 pcf   40 kg/m³), JOPLIN (1 m², R <sub>SI</sub> -1) |                             |                              |             |
|-----------------------------------------------------------------------------------------------------|-----------------------------|------------------------------|-------------|
| TRACI v2.1                                                                                          | A1 - A3<br>STANDARD PRODUCT | A1 - A3<br>CERTIFIED PRODUCT | %<br>CHANGE |
| GWP 100 [kg CO <sub>2</sub> eq]                                                                     | 8.78E-01                    | 5.07E-01                     | -42%        |
| ODP [kg CFC-11 eq]                                                                                  | 1.20E-07                    | 9.68E-08                     | -19%        |
| AP [kg SO <sub>2</sub> eq]                                                                          | 3.47E-03                    | 2.43E-03                     | -30%        |
| EP [kg N eq]                                                                                        | 8.59E-04                    | 4.05E-04                     | -53%        |
| POCP [kg O <sub>3</sub> eq]                                                                         | 6.13E-02                    | 4.71E-02                     | -23%        |
| ADP <sub>fossil</sub> [MJ, LHV]                                                                     | 1.47E+00                    | 1.16E+00                     | -21%        |

## 6.7. Further Information

Additional information may be found at [www.owenscorning.com/thermafiber](http://www.owenscorning.com/thermafiber)





# ENVIRONMENTAL PRODUCT DECLARATION



Thermafiber® Mineral Wool



According to ISO 14025,  
EN 15804 and ISO 21930:2017

## 7. References

Product Category Rules (PCR) Guidance for Building-Related Products and Services - Part B: Building Envelope Thermal Insulation EPD Requirements, UL 10010-1 Version 2.0, Second Edition, UL Environment, April 10, 2018.

Product Category Rules for Building Related Products and Services - Part A: Life Cycle Assessment Calculation Rules and Report Requirements, UL 10010 Version 3.2, Fifth Edition, UL Environment, December 12, 2018.

ISO 14025:2006(E), Environmental labels and declarations -Type III environmental declarations -Principles and procedures

ISO 14040:2006(E), Environmental management - Life cycle assessment - Principles and framework

ISO 14044:2006(E), Environmental management - Life cycle assessment - Requirements and guidelines

BS EN 15804:2012, Sustainability of construction works - Environmental product declarations - Core rules for the product category of construction products

ISO 21930:2017(E), Sustainability in buildings and civil engineering works - Core rules for environmental product declarations of construction products and services

PRé Consultants: SimaPro 9.1 LCA Software. 2021. The Netherlands.

ASTM C518: Standard Test Method for Steady-State Thermal Transmission Properties by Means of the Heat Flow Meter Apparatus

ASTM C553: Standard Specification for Mineral Fiber Blanket Thermal Insulation for Commercial and Industrial Applications

ASTM C665: Standard Specification for Mineral-Fiber Blanket Thermal Insulation for Light Frame Construction and Manufactured Housing

ASTM C612: Standard Specification for Mineral Fiber Block and Board Thermal Insulation

ASTM E84, Standard Test Method for Surface Burning Characteristics of Building Materials

ASTM E96, Standard Test Methods for Water Vapor Transmission Materials

ASTM C1104, Standard Test Method for Determining the Water Vapor Sorption of Unfaced Mineral Fiber Insulation

ASTM C1338, Standard Test Method for Determining Fungi Resistance of Insulation Materials and Facings

ASTM C356: Standard Test Method for Linear Shrinkage of Preformed High-Temperature Thermal Insulation Subjected to Soaking Heat

Standard Method for the Testing and Evaluation of Volatile Organic Chemical Emissions from Indoor Sources using Environmental Chambers - version 1.2, CA Specification 01350, January 2017.

CCMC. Canadian Construction Materials Centre. [nrc.canada.ca/en/certifications-evaluations-standards/canadian-construction-materials-centre](http://nrc.canada.ca/en/certifications-evaluations-standards/canadian-construction-materials-centre)

NFPA 101: Life Safety Code

CAN/ULC S702: Standard for Mineral Fibre Thermal Insulation for Buildings

CAN/ULC S102: Standard Method of Test for Surface Burning Characteristics of building Materials and Assemblies

CAN/ULC S129: Fire test for smoulder resistance of insulation



# ENVIRONMENTAL PRODUCT DECLARATION



Thermafiber® Mineral Wool

According to ISO 14025,  
EN 15804 and ISO 21930:2017

## 8. Appendices

### 8.1. Appendix A

The following tables provide scaling factors necessary to convert results from Table 10 to other available products and thicknesses as described in Section 4.3. For faced products, results from Table 10 need to be added to the scaled results. For general convenience and Buy Clean California (BCCA) reference, the calculated GWP for each product at 1 m<sup>2</sup> at R<sub>SI</sub>=1 is listed.

**Table 20. Product Scaling Factors for LIGHT DENSITY (less than 4.3 lbs/ft<sup>3</sup>) products produced in JOPLIN (<5 in | 127 mm thickness)**

| Product                       | Scaling Factor for Functional Unit (1 m <sup>2</sup> ) at R <sub>SI</sub> = 1 | BCCA Calculated Product GWP (A1-A3) for 1 m <sup>2</sup> at R <sub>SI</sub> =1 | Scaling Factor Based on Product Thickness (inches   mm) for 1 m <sup>2</sup> |       |       |       |       |       |       |       |        |        |
|-------------------------------|-------------------------------------------------------------------------------|--------------------------------------------------------------------------------|------------------------------------------------------------------------------|-------|-------|-------|-------|-------|-------|-------|--------|--------|
|                               |                                                                               |                                                                                | 1"                                                                           | 1.4"  | 1.5"  | 1.8"  | 2"    | 2.5"  | 3"    | 3.5"  | 4"     | 4.5"   |
|                               |                                                                               |                                                                                | 25 mm                                                                        | 36 mm | 38 mm | 46 mm | 51 mm | 64 mm | 76 mm | 89 mm | 102 mm | 114 mm |
| Fire & Sound Guard® Plus R-10 | 1.61                                                                          | 1.41                                                                           | --                                                                           | --    | --    | --    | --    | 2.99  | --    | --    | --     | --     |
| Fire & Sound Guard® Plus R-11 | 1.06                                                                          | 0.93                                                                           | --                                                                           | --    | --    | --    | --    | --    | 2.17  | --    | --     | --     |
| Fire & Sound Guard® Plus R-13 | 1.06                                                                          | 0.93                                                                           | --                                                                           | --    | --    | --    | --    | --    | 2.17  | --    | --     | --     |
| Fire & Sound Guard® Plus R-15 | 1.33                                                                          | 1.17                                                                           | --                                                                           | --    | --    | --    | --    | --    | --    | 3.55  | --     | --     |
| Fire & Sound Guard® Plus R-23 | 1.24                                                                          | 1.09                                                                           | --                                                                           | --    | --    | --    | --    | --    | --    | --    | --     | --     |
| Fire & Sound Guard® Plus R-24 | 1.42                                                                          | 1.29                                                                           | --                                                                           | --    | --    | --    | --    | --    | --    | --    | --     | --     |
| Fire & Sound Guard® Plus R-30 | 1.33                                                                          | 1.17                                                                           | --                                                                           | --    | --    | --    | --    | --    | --    | --    | --     | --     |
| FireSpan® 40                  | 1.93                                                                          | 1.69                                                                           | --                                                                           | --    | --    | --    | 2.9   | 3.62  | 4.35  | 5.07  | 5.8    | 6.52   |
| SAFB™ (2.5 pcf)               | 1                                                                             | 0.88                                                                           | --                                                                           | --    | 1.09  | --    | 1.45  | 1.81  | 2.17  | 2.54  | 2.9    | 3.26   |
| SAFB™ (4 pcf)                 | 1.93                                                                          | 1.69                                                                           | 1.45                                                                         | --    | --    | --    | --    | --    | --    | --    | --     | --     |
| Safing (4 pcf)                | 1.93                                                                          | 1.69                                                                           | 1.45                                                                         | --    | 2.17  | --    | 2.9   | 3.62  | 4.35  | 5.07  | 5.8    | 6.52   |
| VersaBoard® 35                | 1.7                                                                           | 1.49                                                                           | --                                                                           | --    | 1.9   | --    | 2.54  | 3.17  | 3.81  | 4.44  | 5.07   | 5.71   |
| VersaBoard® 40                | 1.93                                                                          | 1.69                                                                           | 1.45                                                                         | --    | 2.17  | --    | 2.9   | 3.62  | 4.35  | 5.07  | 5.8    | 6.52   |

\*Fire & Sound Guard® Plus replaced Fire & Sound Guard® and UltraBatt™



# ENVIRONMENTAL PRODUCT DECLARATION



Thermafiber® Mineral Wool

According to ISO 14025,  
EN 15804 and ISO 21930:2017

**Table 21. Product Scaling Factors for LIGHT DENSITY (less than 4.3 lbs/ft<sup>3</sup>) products produced in JOPLIN (≥5 in | 127 mm thickness)**

| Product                       | Scaling Factor for Functional Unit (1 m <sup>2</sup> ) at R <sub>SI</sub> = 1 | BCCA Calculated Product GWP (A1-A3) for 1 m <sup>2</sup> at R <sub>SI</sub> =1 | Scaling Factor Based on Product Thickness (inches   mm) for 1 m <sup>2</sup> |        |        |        |        |        |        |
|-------------------------------|-------------------------------------------------------------------------------|--------------------------------------------------------------------------------|------------------------------------------------------------------------------|--------|--------|--------|--------|--------|--------|
|                               |                                                                               |                                                                                | 5"                                                                           | 5.5"   | 6"     | 6.5"   | 7"     | 7.1"   | 8"     |
|                               |                                                                               |                                                                                | 127 mm                                                                       | 140 mm | 152 mm | 165 mm | 179 mm | 180 mm | 203 mm |
| Fire & Sound Guard® Plus R-10 | 1.61                                                                          | 1.41                                                                           | --                                                                           | --     | --     | --     | --     | --     | --     |
| Fire & Sound Guard® Plus R-11 | 1.06                                                                          | 0.93                                                                           | --                                                                           | --     | --     | --     | --     | --     | --     |
| Fire & Sound Guard® Plus R-13 | 1.06                                                                          | 0.93                                                                           | --                                                                           | --     | --     | --     | --     | --     | --     |
| Fire & Sound Guard® Plus R-15 | 1.33                                                                          | 1.17                                                                           | --                                                                           | --     | --     | --     | --     | --     | --     |
| Fire & Sound Guard® Plus R-23 | 1.24                                                                          | 1.09                                                                           | --                                                                           | 5.18   | --     | --     | --     | --     | --     |
| Fire & Sound Guard® Plus R-24 | 1.42                                                                          | 1.29                                                                           | --                                                                           | --     | 6.52   | --     | --     | --     | --     |
| Fire & Sound Guard® Plus R-30 | 1.33                                                                          | 1.17                                                                           | --                                                                           | --     | --     | --     | --     | 6.95   | --     |
| FireSpan® 40                  | 1.93                                                                          | 1.69                                                                           | 7.25                                                                         | 7.97   | 8.7    | 9.42   | 10.15  | --     | --     |
| SAFB™ (2.5 pcf)               | 1                                                                             | 0.88                                                                           | 3.62                                                                         | 3.99   | 4.35   | 4.71   | 5.07   | --     | --     |
| SAFB™ (4 pcf)                 | 1.93                                                                          | 1.69                                                                           | --                                                                           | --     | --     | --     | --     | --     | --     |
| Safing (4 pcf)                | 1.93                                                                          | 1.69                                                                           | 7.25                                                                         | 7.97   | 8.7    | 9.42   | 10.15  | --     | --     |
| VersaBoard® 35                | 1.7                                                                           | 1.49                                                                           | 6.34                                                                         | 6.98   | 7.61   | 8.24   | 8.88   | --     | --     |
| VersaBoard® 40                | 1.93                                                                          | 1.69                                                                           | 7.25                                                                         | 7.97   | 8.7    | 9.42   | 10.15  | --     | --     |



# ENVIRONMENTAL PRODUCT DECLARATION



Thermafiber® Mineral Wool

According to ISO 14025,  
EN 15804 and ISO 21930:2017

**Table 22. Product Scaling Factors for HEAVY DENSITY (4.4-8 lbs/ft<sup>3</sup>) products produced in JOPLIN (<5 in | 127 mm thickness)**

| Product                                     | Scaling Factor for Functional Unit (1 m <sup>2</sup> ) at R <sub>SI</sub> = 1 | BCCA Calculated Product GWP (A1-A3) for 1 m <sup>2</sup> at R <sub>SI</sub> =1 | Scaling Factor Based on Product Thickness (inches   mm) FOR 1 m <sup>2</sup> |       |       |       |       |       |       |       |        |        |
|---------------------------------------------|-------------------------------------------------------------------------------|--------------------------------------------------------------------------------|------------------------------------------------------------------------------|-------|-------|-------|-------|-------|-------|-------|--------|--------|
|                                             |                                                                               |                                                                                | 1"                                                                           | 1.25" | 1.5"  | 1.9"  | 2"    | 2.5"  | 3"    | 3.5"  | 4"     | 4.5"   |
|                                             |                                                                               |                                                                                | 25 mm                                                                        | 32 mm | 38 mm | 48 mm | 51 mm | 64 mm | 76 mm | 89 mm | 102 mm | 114 mm |
| FireSpan® 90                                | 3.02                                                                          | 2.65                                                                           | 2.36                                                                         | --    | 3.53  | --    | 4.71  | 5.89  | 7.07  | 8.24  | 9.42   | 10.6   |
| RainBarrier®                                | 2.11                                                                          | 1.85                                                                           | 1.63                                                                         | --    | 2.45  | --    | 3.26  | 4.08  | 4.89  | 5.71  | 6.52   | 7.34   |
| RainBarrier® ci High Compressive (80)       | 3.23                                                                          | 3.19                                                                           | --                                                                           | --    | 3.81  | --    | 5.07  | 6.34  | 7.61  | 8.88  | 10.15  | --     |
| RainBarrier® ci High Compressive Plus (110) | 3.63                                                                          | 3.19                                                                           | --                                                                           | 3.62  | 4.35  | --    | 5.8   | 7.25  | 8.7   | 10.15 | 11.6   | 13.05  |
| RainBarrier® ci High Compressive Max (140)  | 4.76                                                                          | 4.18                                                                           | 3.99                                                                         | --    | 5.98  | --    | 7.97  | 9.97  | 11.96 | 13.95 | 15.95  | --     |
| Safing (6 pcf)                              | 2.81                                                                          | 2.47                                                                           | 2.17                                                                         | --    | 3.26  | --    | 4.35  | 5.44  | 6.52  | 7.61  | 8.7    | 9.79   |
| VersaBoard® 60                              | 2.81                                                                          | 2.47                                                                           | 2.17                                                                         | --    | 3.26  | --    | 4.35  | 5.44  | 6.52  | 7.61  | 8.7    | 9.79   |
| VersaBoard® 80                              | 3.63                                                                          | 3.19                                                                           | 2.9                                                                          | --    | 4.35  | --    | 5.8   | 7.25  | 8.7   | 10.15 | 11.6   | 13.05  |

\*RainBarrier® replaced RainBarrier® 45 and RainBarrier® HD



# ENVIRONMENTAL PRODUCT DECLARATION



Thermafiber® Mineral Wool

According to ISO 14025,  
EN 15804 and ISO 21930:2017

**Table 23. Product Scaling Factors for HEAVY DENSITY (4.4-8 lbs/ft³) products produced in JOPLIN (≥ 5 in | 127 mm thickness)**

| Product                                     | Scaling Factor for Functional Unit (1 m²) at R <sub>SI</sub> = 1 | BCCA Calculated Product GWP (A1-A3) for 1 m² at R <sub>SI</sub> =1 | Scaling Factor Based on Product Thickness (inches   mm) FOR 1 m² |        |        |        |        |        |        |        |        |
|---------------------------------------------|------------------------------------------------------------------|--------------------------------------------------------------------|------------------------------------------------------------------|--------|--------|--------|--------|--------|--------|--------|--------|
|                                             |                                                                  |                                                                    | 5"                                                               | 5.5"   | 5.8"   | 6"     | 6.5"   | 7"     | 7.1"   | 8"     | 10"    |
|                                             |                                                                  |                                                                    | 127 mm                                                           | 140 mm | 147 mm | 152 mm | 165 mm | 179 mm | 180 mm | 203 mm | 254 mm |
| FireSpan® 90                                | 3.02                                                             | 2.65                                                               | 11.78                                                            | 12.96  | --     | 14.13  | 15.31  | 16.49  | --     | --     | --     |
| RainBarrier®                                | 2.11                                                             | 1.85                                                               | 8.15                                                             | 8.97   | --     | 9.79   | 10.6   | 11.42  | --     | --     | --     |
| RainBarrier® ci High Compressive (80)       | 3.23                                                             | 3.19                                                               | --                                                               | --     | --     | --     | --     | --     | --     | --     | --     |
| RainBarrier® ci High Compressive Plus (110) | 3.63                                                             | 3.19                                                               | 14.5                                                             | 15.95  | --     | 17.4   | 18.85  | 20.29  | --     | --     | --     |
| RainBarrier® ci High Compressive Max (140)  | 4.76                                                             | 4.18                                                               | --                                                               | --     | --     | --     | --     | --     | --     | --     | --     |
| Safing (6 pcf)                              | 2.81                                                             | 2.47                                                               | 10.87                                                            | 11.96  | --     | 13.05  | 14.13  | 15.22  | --     | --     | --     |
| VersaBoard® 60                              | 2.81                                                             | 2.47                                                               | 10.87                                                            | 11.96  | --     | 13.05  | 14.13  | 15.22  | --     | --     | --     |
| VersaBoard® 80                              | 3.63                                                             | 3.19                                                               | 14.5                                                             | --     | --     | --     | --     | --     | --     | --     | --     |

**Table 24. Product Scaling Factors for HEAVY DENSITY (greater than 8 lbs/ft³) products produced in JOPLIN (<5 in | 127 mm thickness)**

| Product       | Scaling Factor for Functional Unit (1 m²) at R <sub>SI</sub> = 1 | Calculated Product GWP (A1-A3) for 1 m² at R <sub>SI</sub> =1 | Scaling Factor Based on Product Thickness (inches   mm) FOR 1 m² |       |       |       |       |        |
|---------------|------------------------------------------------------------------|---------------------------------------------------------------|------------------------------------------------------------------|-------|-------|-------|-------|--------|
|               |                                                                  |                                                               | 1"                                                               | 1.5"  | 2"    | 2.5"  | 3"    | 4"     |
|               |                                                                  |                                                               | 25 mm                                                            | 38 mm | 51 mm | 64 mm | 76 mm | 102 mm |
| FireSpan® 120 | 5.1                                                              | 4.48                                                          | --                                                               | --    | --    | --    | 13.05 | --     |



# ENVIRONMENTAL PRODUCT DECLARATION



Thermafiber® Mineral Wool

According to ISO 14025,  
EN 15804 and ISO 21930:2017

## 8.2. Appendix B

The tables below contain results for 1 m<sup>2</sup> of various facing materials only. These results need to be added to the appropriately scaled results as described in Section 4.3.

**Table 25 LCIA Results for North America (TRACI) for 5225T-White Facing (1 m<sup>2</sup>)**

| 5225T-White (1 m <sup>2</sup> ) |          |          |     |         |     |          |     |          |
|---------------------------------|----------|----------|-----|---------|-----|----------|-----|----------|
| TRACI v2.1                      | A1 - A3  | A4       | A5  | B1 - B7 | C1  | C2       | C3  | C4       |
| GWP 100 [kg CO <sub>2</sub> eq] | 4.38E-01 | 1.20E-01 | MND | MND     | MND | 1.21E-03 | MND | 1.33E-04 |
| ODP [kg CFC-11 eq]              | 2.37E-08 | 2.90E-08 | MND | MND     | MND | 2.93E-10 | MND | 2.98E-11 |
| AP [kg SO <sub>2</sub> eq]      | 2.49E-03 | 7.46E-04 | MND | MND     | MND | 7.54E-06 | MND | 1.28E-06 |
| EP [kg N eq]                    | 2.05E-04 | 7.80E-05 | MND | MND     | MND | 7.88E-07 | MND | 1.11E-07 |
| POCP [kg O <sub>3</sub> eq]     | 3.11E-02 | 2.17E-02 | MND | MND     | MND | 2.19E-04 | MND | 3.87E-05 |
| ADP <sub>fossil</sub> [MJ, LHV] | 3.46E-01 | 2.57E-01 | MND | MND     | MND | 2.60E-03 | MND | 2.65E-04 |

**Table 26 LCIA Results for North America (TRACI) for 5263 Printed 5x5 Facing (1 m<sup>2</sup>)**

| 5263 Printed 5x5 (1 m <sup>2</sup> ) |          |          |     |         |     |          |     |          |
|--------------------------------------|----------|----------|-----|---------|-----|----------|-----|----------|
| TRACI v2.1                           | A1 - A3  | A4       | A5  | B1 - B7 | C1  | C2       | C3  | C4       |
| GWP 100 [kg CO <sub>2</sub> eq]      | 4.68E-01 | 1.48E-02 | MND | MND     | MND | 1.43E-03 | MND | 1.57E-04 |
| ODP [kg CFC-11 eq]                   | 2.50E-08 | 3.58E-09 | MND | MND     | MND | 3.47E-10 | MND | 3.53E-11 |
| AP [kg SO <sub>2</sub> eq]           | 2.60E-03 | 9.21E-05 | MND | MND     | MND | 8.91E-06 | MND | 1.51E-06 |
| EP [kg N eq]                         | 2.17E-04 | 9.62E-06 | MND | MND     | MND | 9.31E-07 | MND | 1.31E-07 |
| POCP [kg O <sub>3</sub> eq]          | 3.28E-02 | 2.68E-03 | MND | MND     | MND | 2.59E-04 | MND | 4.57E-05 |
| ADP <sub>fossil</sub> [MJ, LHV]      | 4.54E-01 | 3.17E-02 | MND | MND     | MND | 3.07E-03 | MND | 3.14E-04 |

**Table 27 LCIA Results for North America (TRACI) for VL6307 Facing (1 m<sup>2</sup>)**

| VL6307 (1 m <sup>2</sup> )      |          |          |     |         |     |          |     |          |
|---------------------------------|----------|----------|-----|---------|-----|----------|-----|----------|
| TRACI v2.1                      | A1 - A3  | A4       | A5  | B1 - B7 | C1  | C2       | C3  | C4       |
| GWP 100 [kg CO <sub>2</sub> eq] | 1.45E-01 | 1.45E-02 | MND | MND     | MND | 1.40E-03 | MND | 1.53E-04 |
| ODP [kg CFC-11 eq]              | 1.20E-08 | 3.50E-09 | MND | MND     | MND | 3.39E-10 | MND | 3.44E-11 |
| AP [kg SO <sub>2</sub> eq]      | 9.09E-04 | 8.99E-05 | MND | MND     | MND | 8.70E-06 | MND | 1.48E-06 |
| EP [kg N eq]                    | 7.13E-05 | 9.39E-06 | MND | MND     | MND | 9.09E-07 | MND | 1.28E-07 |
| POCP [kg O <sub>3</sub> eq]     | 1.40E-02 | 2.61E-03 | MND | MND     | MND | 2.53E-04 | MND | 4.46E-05 |
| ADP <sub>fossil</sub> [MJ, LHV] | 2.27E-01 | 3.10E-02 | MND | MND     | MND | 3.00E-03 | MND | 3.06E-04 |



# ENVIRONMENTAL PRODUCT DECLARATION



Thermafiber® Mineral Wool

According to ISO 14025,  
EN 15804 and ISO 21930:2017

## 8.3. Appendix C

The tables below contain results for 1 m<sup>2</sup> of various facing materials only. These results need to be added to the appropriately scaled results as described in Section 4.3.

**Table 28 Resource Use for 5225T-White Facing (1 m<sup>2</sup>)**

| Parameter            | A1 - A3  | A4       | A5  | B1 - B7 | C1  | C2       | C3  | C4       |
|----------------------|----------|----------|-----|---------|-----|----------|-----|----------|
| RPRE [MJ, LHV]       | 4.32E-01 | 2.35E-04 | MND | MND     | MND | 2.28E-05 | MND | 7.38E-06 |
| RPRM [MJ, LHV]       | 0.00E+00 | 0.00E+00 | MND | MND     | MND | 0.00E+00 | MND | 0.00E+00 |
| NRPRE [MJ, LHV]      | 5.37E+00 | 2.06E-01 | MND | MND     | MND | 1.99E-02 | MND | 2.07E-03 |
| NRPRM [MJ, LHV]      | 6.56E-01 | 0.00E+00 | MND | MND     | MND | 0.00E+00 | MND | 0.00E+00 |
| SM [kg]              | 0.00E+00 | 0.00E+00 | MND | MND     | MND | 0.00E+00 | MND | 0.00E+00 |
| RSF [MJ, LHV]        | 0.00E+00 | 0.00E+00 | MND | MND     | MND | 0.00E+00 | MND | 0.00E+00 |
| NRSF [MJ, LHV]       | 0.00E+00 | 0.00E+00 | MND | MND     | MND | 0.00E+00 | MND | 0.00E+00 |
| RE [MJ, LHV]         | 0.00E+00 | 0.00E+00 | MND | MND     | MND | 0.00E+00 | MND | 0.00E+00 |
| FW [m <sup>3</sup> ] | 2.97E-03 | 4.49E-06 | MND | MND     | MND | 4.34E-07 | MND | 3.98E-08 |

**Table 29 Resource Use for 5263 Printed 5x5 Facing (1 m<sup>2</sup>)**

| Parameter            | A1 - A3  | A4       | A5  | B1 - B7 | C1  | C2       | C3  | C4       |
|----------------------|----------|----------|-----|---------|-----|----------|-----|----------|
| RPRE [MJ, LHV]       | 4.57E-01 | 2.57E-04 | MND | MND     | MND | 2.49E-05 | MND | 8.06E-06 |
| RPRM [MJ, LHV]       | 0.00E+00 | 0.00E+00 | MND | MND     | MND | 0.00E+00 | MND | 0.00E+00 |
| NRPRE [MJ, LHV]      | 6.01E+00 | 2.25E-01 | MND | MND     | MND | 2.18E-02 | MND | 2.27E-03 |
| NRPRM [MJ, LHV]      | 1.48E+00 | 0.00E+00 | MND | MND     | MND | 0.00E+00 | MND | 0.00E+00 |
| SM [kg]              | 0.00E+00 | 0.00E+00 | MND | MND     | MND | 0.00E+00 | MND | 0.00E+00 |
| RSF [MJ, LHV]        | 0.00E+00 | 0.00E+00 | MND | MND     | MND | 0.00E+00 | MND | 0.00E+00 |
| NRSF [MJ, LHV]       | 0.00E+00 | 0.00E+00 | MND | MND     | MND | 0.00E+00 | MND | 0.00E+00 |
| RE [MJ, LHV]         | 0.00E+00 | 0.00E+00 | MND | MND     | MND | 0.00E+00 | MND | 0.00E+00 |
| FW [m <sup>3</sup> ] | 3.35E-03 | 4.90E-06 | MND | MND     | MND | 4.75E-07 | MND | 4.35E-08 |

**Table 30 Resource Use for VL6370 Facing (1 m<sup>2</sup>)**

| Parameter            | A1 - A3  | A4       | A5  | B1 - B7 | C1  | C2       | C3  | C4       |
|----------------------|----------|----------|-----|---------|-----|----------|-----|----------|
| RPRE [MJ, LHV]       | 9.35E-02 | 2.51E-04 | MND | MND     | MND | 2.43E-05 | MND | 7.87E-06 |
| RPRM [MJ, LHV]       | 0.00E+00 | 0.00E+00 | MND | MND     | MND | 0.00E+00 | MND | 0.00E+00 |
| NRPRE [MJ, LHV]      | 2.23E+00 | 2.19E-01 | MND | MND     | MND | 2.12E-02 | MND | 2.21E-03 |
| NRPRM [MJ, LHV]      | 8.56E-01 | 0.00E+00 | MND | MND     | MND | 0.00E+00 | MND | 0.00E+00 |
| SM [kg]              | 0.00E+00 | 0.00E+00 | MND | MND     | MND | 0.00E+00 | MND | 0.00E+00 |
| RSF [MJ, LHV]        | 0.00E+00 | 0.00E+00 | MND | MND     | MND | 0.00E+00 | MND | 0.00E+00 |
| NRSF [MJ, LHV]       | 0.00E+00 | 0.00E+00 | MND | MND     | MND | 0.00E+00 | MND | 0.00E+00 |
| RE [MJ, LHV]         | 0.00E+00 | 0.00E+00 | MND | MND     | MND | 0.00E+00 | MND | 0.00E+00 |
| FW [m <sup>3</sup> ] | 1.25E-03 | 4.79E-06 | MND | MND     | MND | 4.64E-07 | MND | 4.25E-08 |



# ENVIRONMENTAL PRODUCT DECLARATION



Thermafiber® Mineral Wool

According to ISO 14025,  
EN 15804 and ISO 21930:2017

## 8.4. Appendix D

The tables below contain results for 1 m<sup>2</sup> of various facing materials only. These results need to be added to the appropriately scaled results as described in Section 4.3.

**Table 31 Output Flows and Waste Categories for 5225T-White Facing (1 m<sup>2</sup>)**

| Parameter                       | A1 - A3  | A4       | A5  | B1 - B7 | C1  | C2       | C3  | C4       |
|---------------------------------|----------|----------|-----|---------|-----|----------|-----|----------|
| HWD [kg]                        | 8.48E-05 | 5.23E-07 | MND | MND     | MND | 5.06E-08 | MND | 4.92E-09 |
| NHWD [kg]                       | 6.78E-02 | 4.99E-05 | MND | MND     | MND | 4.83E-06 | MND | 1.16E-01 |
| HLRW [kg] or [m <sup>3</sup> ]  | 7.51E-07 | 8.61E-10 | MND | MND     | MND | 8.33E-11 | MND | 1.91E-11 |
| ILLRW [kg] or [m <sup>3</sup> ] | 6.96E-06 | 1.37E-06 | MND | MND     | MND | 1.33E-07 | MND | 1.35E-08 |
| CRU [kg]                        | 0.00E+00 | 0.00E+00 | MND | MND     | MND | 0.00E+00 | MND | 0.00E+00 |
| MR [kg]                         | 0.00E+00 | 0.00E+00 | MND | MND     | MND | 0.00E+00 | MND | 0.00E+00 |
| MER [kg]                        | 0.00E+00 | 0.00E+00 | MND | MND     | MND | 0.00E+00 | MND | 0.00E+00 |
| EE [MJ, LHV]                    | 0.00E+00 | 0.00E+00 | MND | MND     | MND | 0.00E+00 | MND | 0.00E+00 |

**Table 32 Output Flows and Waste Categories for 5263 Printed 5x5 Facing (1 m<sup>2</sup>)**

| Parameter                       | A1 - A3  | A4       | A5  | B1 - B7 | C1  | C2       | C3  | C4       |
|---------------------------------|----------|----------|-----|---------|-----|----------|-----|----------|
| HWD [kg]                        | 8.48E-05 | 5.71E-07 | MND | MND     | MND | 5.53E-08 | MND | 5.37E-09 |
| NHWD [kg]                       | 6.60E-02 | 5.45E-05 | MND | MND     | MND | 5.28E-06 | MND | 1.27E-01 |
| HLRW [kg] or [m <sup>3</sup> ]  | 8.46E-07 | 9.41E-10 | MND | MND     | MND | 9.11E-11 | MND | 2.09E-11 |
| ILLRW [kg] or [m <sup>3</sup> ] | 7.34E-06 | 1.50E-06 | MND | MND     | MND | 1.45E-07 | MND | 1.48E-08 |
| CRU [kg]                        | 0.00E+00 | 0.00E+00 | MND | MND     | MND | 0.00E+00 | MND | 0.00E+00 |
| MR [kg]                         | 0.00E+00 | 0.00E+00 | MND | MND     | MND | 0.00E+00 | MND | 0.00E+00 |
| MER [kg]                        | 0.00E+00 | 0.00E+00 | MND | MND     | MND | 0.00E+00 | MND | 0.00E+00 |
| EE [MJ, LHV]                    | 0.00E+00 | 0.00E+00 | MND | MND     | MND | 0.00E+00 | MND | 0.00E+00 |

**Table 33 Output Flows and Waste Categories for V6307 Facing (1 m<sup>2</sup>)**

| Parameter                       | A1 - A3  | A4       | A5  | B1 - B7 | C1  | C2       | C3  | C4       |
|---------------------------------|----------|----------|-----|---------|-----|----------|-----|----------|
| HWD [kg]                        | 2.16E-06 | 5.58E-07 | MND | MND     | MND | 5.40E-08 | MND | 5.24E-09 |
| NHWD [kg]                       | 1.08E-02 | 5.33E-05 | MND | MND     | MND | 5.16E-06 | MND | 1.24E-01 |
| HLRW [kg] or [m <sup>3</sup> ]  | 5.32E-07 | 9.19E-10 | MND | MND     | MND | 8.89E-11 | MND | 2.04E-11 |
| ILLRW [kg] or [m <sup>3</sup> ] | 3.75E-06 | 1.47E-06 | MND | MND     | MND | 1.42E-07 | MND | 1.44E-08 |
| CRU [kg]                        | 0.00E+00 | 0.00E+00 | MND | MND     | MND | 0.00E+00 | MND | 0.00E+00 |
| MR [kg]                         | 0.00E+00 | 0.00E+00 | MND | MND     | MND | 0.00E+00 | MND | 0.00E+00 |
| MER [kg]                        | 0.00E+00 | 0.00E+00 | MND | MND     | MND | 0.00E+00 | MND | 0.00E+00 |
| EE [MJ, LHV]                    | 0.00E+00 | 0.00E+00 | MND | MND     | MND | 0.00E+00 | MND | 0.00E+00 |

# ENVIRONMENTAL PRODUCT DECLARATION



Thermafiber® Mineral Wool

According to ISO 14025,  
EN 15804 and ISO 21930:2017

## 8.5. Appendix E

The tables below contain results for 1 m<sup>2</sup> of various facing materials only. These results need to be added to the appropriately scaled results as described in Section 4.3.

**Table 34 Carbon Emissions and Removals for 5225T-White Facing (1 m<sup>2</sup>)**

| Parameter                  | A1 - A3  | A4       | A5  | B1 - B7 | C1  | C2       | C3  | C4       |
|----------------------------|----------|----------|-----|---------|-----|----------|-----|----------|
| BCRP [kg CO <sub>2</sub> ] | 0.00E+00 | 0.00E+00 | MND | MND     | MND | 0.00E+00 | MND | 0.00E+00 |
| BCEP [kg CO <sub>2</sub> ] | 0.00E+00 | 0.00E+00 | MND | MND     | MND | 0.00E+00 | MND | 0.00E+00 |
| BCRK [kg CO <sub>2</sub> ] | 0.00E+00 | 0.00E+00 | MND | MND     | MND | 0.00E+00 | MND | 0.00E+00 |
| BCEK [kg CO <sub>2</sub> ] | 0.00E+00 | 0.00E+00 | MND | MND     | MND | 0.00E+00 | MND | 0.00E+00 |
| BCEW [kg CO <sub>2</sub> ] | 0.00E+00 | 0.00E+00 | MND | MND     | MND | 0.00E+00 | MND | 0.00E+00 |
| CCE [kg CO <sub>2</sub> ]  | 0.00E+00 | 0.00E+00 | MND | MND     | MND | 0.00E+00 | MND | 0.00E+00 |
| CCR [kg CO <sub>2</sub> ]  | 0.00E+00 | 0.00E+00 | MND | MND     | MND | 0.00E+00 | MND | 0.00E+00 |
| CWNR [kg CO <sub>2</sub> ] | 0.00E+00 | 0.00E+00 | MND | MND     | MND | 0.00E+00 | MND | 0.00E+00 |

**Table 35 Carbon Emissions and Removals for 5263 Printed 5x5 Facing (1 m<sup>2</sup>)**

| Parameter                  | A1 - A3  | A4       | A5  | B1 - B7 | C1  | C2       | C3  | C4       |
|----------------------------|----------|----------|-----|---------|-----|----------|-----|----------|
| BCRP [kg CO <sub>2</sub> ] | 0.00E+00 | 0.00E+00 | MND | MND     | MND | 0.00E+00 | MND | 0.00E+00 |
| BCEP [kg CO <sub>2</sub> ] | 0.00E+00 | 0.00E+00 | MND | MND     | MND | 0.00E+00 | MND | 0.00E+00 |
| BCRK [kg CO <sub>2</sub> ] | 0.00E+00 | 0.00E+00 | MND | MND     | MND | 0.00E+00 | MND | 0.00E+00 |
| BCEK [kg CO <sub>2</sub> ] | 0.00E+00 | 0.00E+00 | MND | MND     | MND | 0.00E+00 | MND | 0.00E+00 |
| BCEW [kg CO <sub>2</sub> ] | 0.00E+00 | 0.00E+00 | MND | MND     | MND | 0.00E+00 | MND | 0.00E+00 |
| CCE [kg CO <sub>2</sub> ]  | 0.00E+00 | 0.00E+00 | MND | MND     | MND | 0.00E+00 | MND | 0.00E+00 |
| CCR [kg CO <sub>2</sub> ]  | 0.00E+00 | 0.00E+00 | MND | MND     | MND | 0.00E+00 | MND | 0.00E+00 |
| CWNR [kg CO <sub>2</sub> ] | 0.00E+00 | 0.00E+00 | MND | MND     | MND | 0.00E+00 | MND | 0.00E+00 |

**Table 36 Carbon Emissions and Removals for V6307 Facing (1 m<sup>2</sup>)**

| Parameter                  | A1 - A3  | A4       | A5  | B1 - B7 | C1  | C2       | C3  | C4       |
|----------------------------|----------|----------|-----|---------|-----|----------|-----|----------|
| BCRP [kg CO <sub>2</sub> ] | 0.00E+00 | 0.00E+00 | MND | MND     | MND | 0.00E+00 | MND | 0.00E+00 |
| BCEP [kg CO <sub>2</sub> ] | 0.00E+00 | 0.00E+00 | MND | MND     | MND | 0.00E+00 | MND | 0.00E+00 |
| BCRK [kg CO <sub>2</sub> ] | 0.00E+00 | 0.00E+00 | MND | MND     | MND | 0.00E+00 | MND | 0.00E+00 |
| BCEK [kg CO <sub>2</sub> ] | 0.00E+00 | 0.00E+00 | MND | MND     | MND | 0.00E+00 | MND | 0.00E+00 |
| BCEW [kg CO <sub>2</sub> ] | 0.00E+00 | 0.00E+00 | MND | MND     | MND | 0.00E+00 | MND | 0.00E+00 |
| CCE [kg CO <sub>2</sub> ]  | 0.00E+00 | 0.00E+00 | MND | MND     | MND | 0.00E+00 | MND | 0.00E+00 |
| CCR [kg CO <sub>2</sub> ]  | 0.00E+00 | 0.00E+00 | MND | MND     | MND | 0.00E+00 | MND | 0.00E+00 |
| CWNR [kg CO <sub>2</sub> ] | 0.00E+00 | 0.00E+00 | MND | MND     | MND | 0.00E+00 | MND | 0.00E+00 |

**THERMAFIBER, INC.**  
ONE OWENS CORNING PARKWAY  
TOLEDO, OHIO, 43659 USA  
**888-TFIBER [834-2371]**  
[www.owenscorning.com/thermafiber](http://www.owenscorning.com/thermafiber)

Pub. No. 10019415-D. © 2024 Owens Corning. All Rights Reserved.

